
CX45D



MINI EXCAVATORS

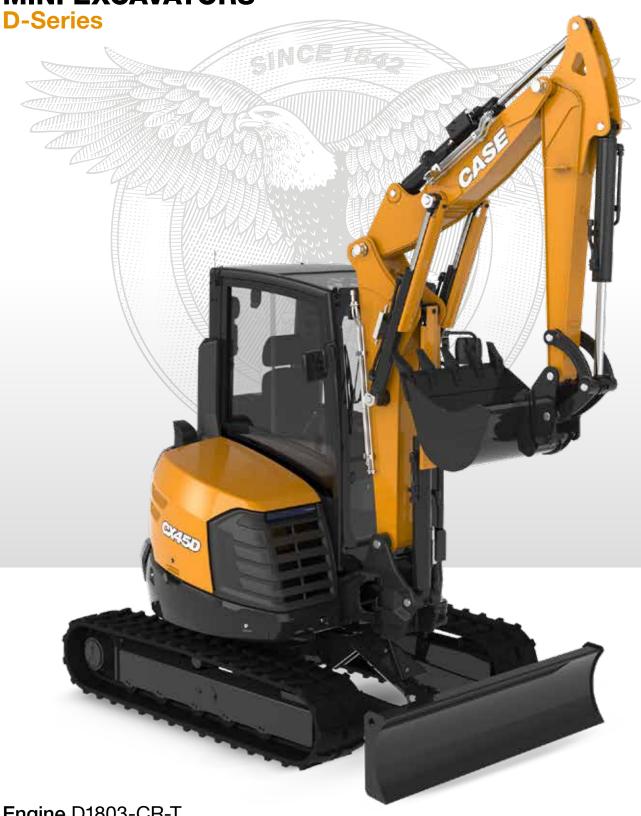

Engine D1803-CR-T Engine power 32.3 kW - 43.3 hp Operating weight 4750 kg

SPECIFICATIONS

ENGINE

Type	KUBOTA D1803-CR-T - STAGE 5
Max. Power (2300 rpm) (kW	/ hp)32.3 - 43.3
Displacement (cm³)	1826
Number of cylinders (n°)	3
Cooling	Liquid
	5.4
Alternator (V)	12 (70 A)
Battery V (Ah)	12 (74)


HYDRAULIC SYSTEM		
Circuit Type	_ Load Sensing closed	center system
	with "Flow Sharing"	' control valve
Pump type	1 LS hydraulic	variable pump
,	with electronic control +	- 1 gear pump
Pump displacement (cm ³	3)	53.7 + 11.2
Pump capacity (I/min)		107 + 22.3
Max. circuit calibration p	ressure (bar)	280
Auxiliary system (max pro	essure):	
AUX 1 single or double e	ffect	
with priority (I/min)	_ 50 (70 Max) - 200 left /	/ 280 right bar
AUX 2 double effect (opti	ional) (I/min)6	0/43 - 280 bar
AUX 3 double effect (opt	ional) (I/min)4	0/32 - 280 bar

SLEWING & TRAVEL SPEED Travelling speed

Iravelling speed	
(AUTO TWO SPEED) (km/h)	$_1^{\text{st}}: 0 \div 2.6 / 2^{\text{nd}}: 0 \div 4.5$
Slew speed (rpm)	10.5


CONTROLS


Boom, dipper stick,	
bucket and turret swing2 pilot joys	sticks
Track movements (included counter rotation) 2 pilot le	evers
Dozer bladepilot	lever
Priority auxiliary system with holding function	
AUX 1 (single or double effect) electroproport	tional
switch on right joy	/stick
Auxiliary system AUX 2 (double effect) electroproport	tional
switch on right joy	/stick
Auxiliary system AUX 3 (double effect) electroproport	tional
switch on left joy	/stick
Boom swing electroproportional switch on left joy	/stick
WEIGHTS	
Transport weight with cab (kg)	4600
Operating weight with cab	
(with rubber tracks) ISO 6016 (kg)	4750
CIRCUIT AND COMPONENT CAPACITIES	
Fuel tank (I)	60
Hydraulic oil tank (I)	50
Hydraulic circuit capacity (I)	65
Cooling system capacity (I)	
Engine oil (I)	7

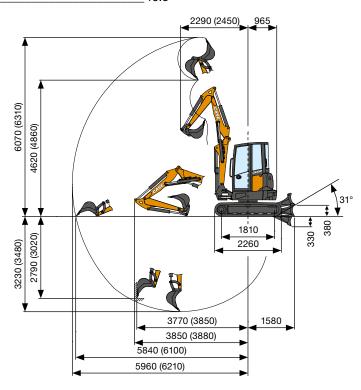

PERFORMANCE DATA		Std. Arm 1400 mm	Opt. Arm 1650 mm
Max. digging depth	mm	3230	3480
Max. dumping height	mm	4620	4860
Bucket breakout force	daN	43	00
Arm breakout force ISO 6015	daN	2200	1960
Traction force	daN	42	60
Ground bearing pressure with rubber tracks	kg/cm ²	0.0	34
May slope		60%	- 30°

60% - 30 Max. slope





GENERAL DIMENSIONS		
Maximum width	mm	1750
Total height	mm	2510
Tracks width	mm	350
Rear rotation radius	mm	975
Digging arm length standard (optional)	mm	1400 (1650)
Rollers number (for each side)	n°	5/1

LIFTING CAPACITY

CX45D


Standard dipper stick L = 1400 mm

Opening arm from the rotation's center (m) Lifting capacity (kg) at 1.0 m height. Standard counterweight

LIFTING CAPACITY	2	3	4	5	Max
Frontal and lowered dozer blade	2320*	1220*	1080*	970*	890*
Frontal and lifted dozer blade	2320*	1210*	760	520	480
Lateral, open undercarriage	1570	870	550	370	340

^{*} Indicates the hydraulic load limit.

The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.



STANDARD EQUIPMENT

- + Tiltable Cab (ROPS/TOPS FOPS Level 1)
- + Automatic Courtesy light
- Electric socket on the roof for Rotating Beacon
- + Windshield washer
- + Rear-view mirrors
- + Fabric seat with Mechanical suspension
- + Standard arm
- + 2-Piece-Boom
- + Boom Lift cylinder and dozer blade cylinder protection
- + Additional counterweight Light
- + Air Filter with drain valve and electric anti-clogging indicator
- + Hydraulic Reversable Fan Drive with automatic functionality

- + Servo-assisted hydraulic joysticks with Electro-Hydraulic proportional controls
- + Electro-Hydraulic proportional Swing control
- Electro-Hydraulic proportional 2-Piece-Boom control
- 1st Auxiliary (AUX1) circuit with Electro-Hydraulic proportional control
- Digital cluster with AUX1, AUX2 and AUX3 flow settings
- + Block valves on 2 piece boom positioner cylinders
- + Electric diverter between Single effect and Double effect AUX1
- 2 speed travel with Automatic Shift Down (from 2nd to 1st gear if more traction is required) and Shift-up
- + Electronic Proportional RPM

- control with Auto-Idle
- + Rubber tracks
- + Standard Dozer Blade
- Operator manual
- + Ignition key, which opens every machine lock
- + Standard LED working lights (boom, right-front hood and left side)
- + Battery disconnect switch
- + Variable Volume Pump
- + Standard Hydraulic oil and Lubricants
- + CASE Sitewatch and SiteConnect
- + Rear view camera
- + Object handling kit (block valves on boom and arm, lifting hook and load chart)

OPTIONAL EQUIPMENT

- + Automatic Air conditioning and Heating
- + DAB Radio, Bluetooth, USB, Aux-in (cab only)
- + Anti-Theft
- + Fabric seat with Pneumatic suspension
- + Travel alarm
- + Long arm
- + Additional counterweight Heavy
- + Electric fuel refill pump
- + 2nd Auxiliary (AUX2) circuit with Electro-Hydraulic proportional control

- 3rd Auxiliary (AUX3) circuit with Electro-Hydraulic proportional control
- Grapple provision (AUX3 with flow diverter from bucket cylinder)
- + Direct Drainage to tank
- + Block valves on dozer blade cylinder
- + Steel tracks
- + 6X1 (Angle/Tilt) Dozer Blade
- + Dozer Float
- Extra LED working lights (cabfront and cab-rear)

- + Rotating beacon
- + Bio Hydraulic oil and Lubricants
- + Automatic Centralized Lubrication
- Constant Flow provision (i.e. for Mulcher): max constant flow of 48 l/min at 180 bar
- + Hydraulic quick coupler provision (Single or Double Effect)
- + Mechanical and Hydraulic quick couplers
- + Buckets

CASE AFTERMARKET SOLUTIONS

- + Superior Protection grid (FOPS Level 2)
- + Front Protection grid (Level 2)
- + Rubber pads for steel tracks
- + Geogrip tracks
- + Vast variety of attachments
- + Full range of Mechanical and Hydraulic quick couplers
- + Full range of Buckets

CNH Industrial

Deutschland GmbH Case Baumaschinen Benzstr. 1-3 - D-74076 Heilbronn DEUTSCHLAND

CNH Industrial

Maquinaria Spain, S.A. Avenida Aragón 402 28022 Madrid - ESPAÑA

CNH Industrial France, S.A.

16-18 Rue des Rochettes 91150 Morigny-Champigny FRANCE

CNH Industrial Italia Spa

Lungo Stura Lazio 19 10156, Torino ITALIA

CASE Construction Equipment

Cranes Farm Rd Basildon - SS14 3AD UNITED KINGDOM

NOTE: Standard and optional fittings can vary according to the demands and specific regulations of each country. The illustrations may include optional rather than standard fittings - consult your Case dealer. Furthermore, CNH Industrial reserves the right to modify machine specifications without incurring any obligation relating to such changes.

Conforms to directive 2006/42/EC



The call is free from a land line. Check in advance with your Mobile Operator if you will be charged. Toll free number not available from all calling areas.