

Mini Track Loader

C314



Take a break from back-breaking work.


Ditch the shovel and wheelbarrow and all the hard manual labour that goes with them. The New Holland C314 mini track loader is all the equipment you need to get more done. The C314's big operating capacity adds more jobs to your residential construction and landscaping checklist. And its narrow working width gets you in and out of tight spots with ease.

Power and versatility are a formidable combination in a C314

- 450kg of rated operating capacity—easily handles lift-and-carry operations
- Common industry interface and 14-pin electric multifunction control—offers greater versatility with new and older attachments
- Wide range of attachments—power New Holland augers, trenchers, grapple buckets, rakes, and more



Model	C314	
Engine	Kubota D1305-E4B	
Emissions certification	Stage V	
Cylinders	(n°)	3
Displacement	(l)	1,261
Fuel	Diesel	
Engine speeds rated – full load	(rpm)	2600
Horsepower @ 2600rpm – SAE J1349:		
Gross	(kW)	18.5
Net	(kW)	18.0
Peak torque @ 1700rpm	(Nm)	80.1
Hydraulics		
Implement pump type	Fixed gear	
Displacement	(cm³)	19
Standard flow @ rated engine rpm: @ 100% efficiency	(l/min)	50
Loader control valve: type	Open center	
Implement hydraulics operating pressure	(bar)	190
Service capacities		
Fuel tank	(l)	30
Engine oil w/ filter	(l)	5.7
Hydraulic system	(l)	17
Engine coolant	(l)	3.5
Drivetrain		
Transmission type	Hydrostatic	
Max. travel speed	(kph)	7.5
Parking brake: type	SAHR pin brake	
Electrical		
System voltage	(V)	12
Alternator	(amp)	60
Battery	62 AHR, 540 cold-cranking amps @ -18°C	
Operating weight		
Narrow Track	2x counterweights (std): 1604kg	
Wide Track	6x counterweights (opt): 1716kg	
Loader performance		
Lift geometry	Radial Lift	
Narrow Track rated operating capacity – ROC:		
35% of tipping load	(kg)	450
50% of tipping load	(kg)	643
Narrow Track tipping load	(kg)	1285
Wide Track rated operating capacity – ROC:		
35% of tipping load	(kg)	500
50% of tipping load	(kg)	714
Wide Track tipping load	(kg)	1428

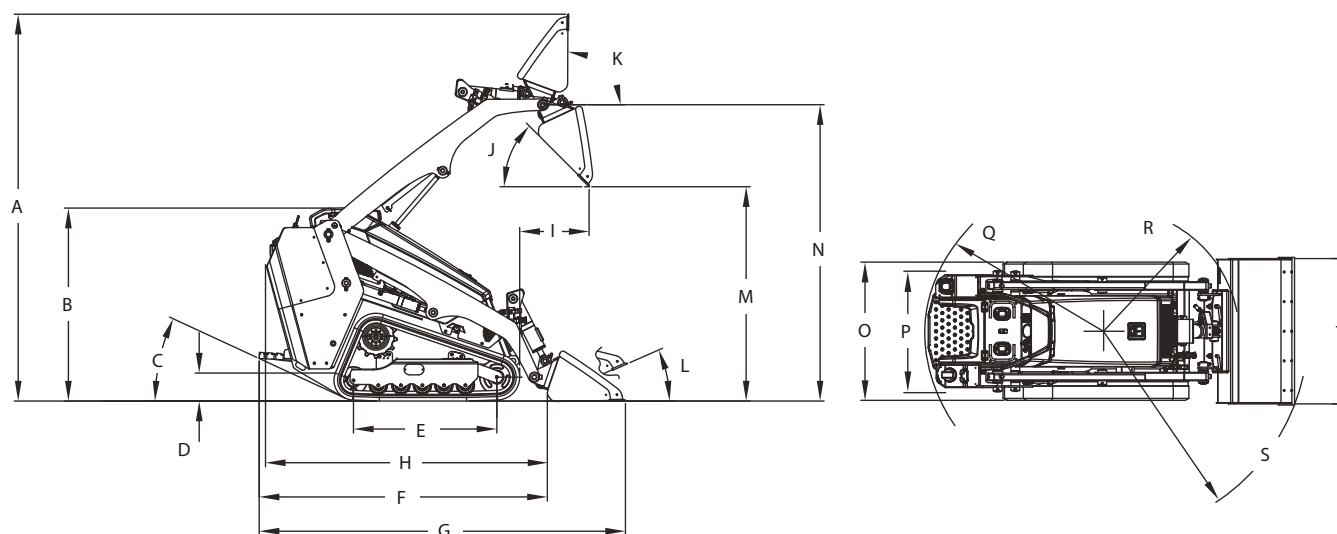

Line drawings are for illustrative purpose only and may not be exact representation of unit.

Dimensions

A Overall operating height	(mm)	2911
B Overall height	(mm)	1435
C Rear departure angle	(°)	24
D Ground clearance	(mm)	222
E Track length on ground	(mm)	1065
Overall length		
F Without bucket	(mm)	2175
G With standard bucket	(mm)	2796
H Transport Length – no bucket, platform raised	(mm)	2155
I Reach at Maximum Dump	(mm)	511
J Dump angle	(°)	48
K Maximum rollback at full height	(°)	90
L Maximum rollback at ground	(°)	24
M Dump height – standard bucket	(mm)	1549
N Hinge Pin Height	(mm)	2201
Machine width:		
O Narrow Track	(mm)	890
Wide Track	(mm)	1026
Track Gauge:		
P Narrow Track	(mm)	710
Wide Track	(mm)	776
Clearance Circle Radius		
Q Rear	(mm)	1348
R No bucket	(mm)	913
S Standard bucket	(mm)	1541
Bucket Width:		
T Narrow Track	(mm)	914
Wide Track	(mm)	1067

Track selection

Type	Area	Ground pressure	Width to outside track
180mm – Narrow Track	0.38m ²	0.41kg/cm ²	890mm
250mm – Wide Track	0.53m ²	0.32kg/cm ²	1026mm

Standard equipment

Operator Environment

- Hydraulic pilot joystick control
- Loader and ground drive control lockout
- Cushioned operator platform
- Operator grab handles
- Key start
- Hand throttle
- Cup holder
- Pocket for cellular phone
- Operator presence sensor

Engine

- Engine tip-over shut-off
- Glow plug starting aid
- Locking fuel cap
- Fuel filter with water separator
- Electric fuel pump

Drivetrain

- Dual hydrostatic drive motors
- SAHR parking brake
- 5 roller undercarriage
- Narrow rubber track belt

Hydraulics

- 3-spool loader control valve
- 1x dual acting auxiliary hydraulics
- Proportional auxiliary hydraulic control on joystick with detent
- Loader arm float

Loader

- Radial lift geometry
- CII mech attachment coupler
- Loader lift arm support strut
- 2x additional counterweight

Electrical

- 12V power plug socket
- Front and rear LED work lights
- Master battery disconnect

Other Standard Features

- Lock-able hood compartment
- Horn

Warranty

- Base warranty coverage: 2-Year/2,000-hour full machine limited warranty

Optional equipment

Drivetrain

- Wide rubber track belt

Hydraulics

- Case drain attachment connection
- Bio-hydraulic oil and lubricants

Electrical

- 14-pin electrical auxiliary connection

Loader

- 36 in dirt bucket
- 42 in dirt bucket
- Bolt on bucket teeth
- Bolt on bucket cutting edge
- 6x additional counterweights

Telematics

- FleetForce™ Telematics – includes hardware and a 5-year advanced subscription

Other

- English, Spanish, or French Operator Manual

AT YOUR OWN DEALER



For more details, ask your New Holland dealer!

Calls to the Top Service team are free from landlines in the United Kingdom and Republic of Ireland. UK-based mobile calls are also free, but Republic of Ireland mobile users should call 01 2421881 and this will be charged at your standard network rate.

www.newholland.com/uk - www.newholland.com/ie



The data indicated in this folder are approximate. The models described here can be subjected to modifications without any notice by the manufacturer. The drawings and photos may refer to equipment that is either optional or intended for other countries. Please apply to our Sales Network for any further information. Published by New Holland Brand Communications. BTS Adv. - Printed in Italy - 12/24 - (Turin) - 244003/INB