

SPEED-TILLER™ 465 & 475

HIGH-SPEED DISK



SPEED-TILLER 465 & 475 HIGH-SPEED DISK

CASE IH

AGRONOMIC DESIGN™

CASE IH



SPEED-TILLER™ 465 & 475

2 Models | Working Widths: 6–41 Ft.

Spring or fall, create a high-efficiency seedbed with the industry's only **agronomically correct high-speed disk**. The Speed-Tiller 465 / 475 high-speed disk cuts, sizes and incorporates high levels of crop residue, creating a healthy soil environment that helps plants thrive.

The Speed-Tiller high-speed disk is built rugged to withstand the harshest soil conditions. It delivers agronomic performance at your speed, in your conditions. And with indexed, independently mounted blades, it's designed to work every inch of your soil profile. The result? A high-efficiency seedbed and industry-leading productivity that Case IH is known for.



SPEED-TILLER 465 & 475 HIGH-SPEED DISK

Agronomic Performance 4-5

Dual-Season Design 6-7

Key Features for Productivity 8-9

Productivity, Connectivity and Profitability 10

Product Specifications 11

CREATING A POSITIVE ENVIRONMENT FOR AGRONOMIC PERFORMANCE

The Speed-Tiller high-speed disk creates a better seedbed without agronomic compromise. Field-tested and proven to be the only high-speed disk on the market worthy of the Case IH Agronomic Design™ badge, the Speed-Tiller has performance and productivity that sets it apart from the rest.

CROP RESIDUE MANAGEMENT

The Speed-Tiller high-speed disk aggressively **cuts, sizes and mixes crop residue** to reduce erosion and increase production capacity. Its industry-exclusive constant-level design puts usable weight on the blades to penetrate the hardest soil conditions and run deeper — from 2 to 6 inches — controlling weeds and destroying root balls. This effective crop residue management allows you to increase organic matter content in the soil.

SOIL TILTH

Ideal soil composition — known as soil tilth — is 50% soil and 50% pore space, with water and air equally distributed throughout. To achieve healthier soil, the Speed-Tiller high-speed disk delivers **deeper soil penetration** and moves more soil than traditional high-speed compact disks. Unmatched agronomic performance maximizes weed control and water penetration for optimal soil composition.

SEEDBED CONDITIONS

The Speed-Tiller high-speed disk **optimizes seedbed conditions, providing desired soil levelness and a smoother seedbed floor**. With indexed, independently mounted blades, the Speed-Tiller effectively works the entire soil profile, eliminating compacted valleys and humps between where blades run below the surface. Effective weed control and clod sizing maximizes seed-to-soil contact for **better stands and higher-yielding plants**.



DON'T JUDGE A SEEDBED BY ITS SURFACE

In addition to mixing crop residue evenly throughout the soil, a level seedbed is key to maximizing yields. However, a seedbed consists of more than just the soil surface. It includes the entire layer of soil where the seed is placed and germinates, including the seedbed floor. It's the seedbed floor that impacts the planter's ability to place seeds at the desired depth and spacing — ultimately affecting yield.

SEEDBED ASSUMPTION


The seedbed surface is the most important aspect of seedbed preparation. When properly set, nearly all high-speed disks provide a smooth surface appearance — and it's often assumed that if the surface appears properly prepared, it's ready for the planter. However, most competitive units on the market lack in creating a subsurface floor that is complementary to young seedling growth and development — instead, they create a ridged and compacted floor.


SEEDBED REALITY

The seedbed floor impacts even plant emergence and is fundamental in maximizing yields. In addition to surface levelness and residue mixing, the Speed-Tiller high-speed disk helps achieve a smoother, more level seedbed floor to optimize planter row unit ride and seed placement accuracy. This in turn leads to more uniform crop germination and even emergence.

AGRONOMIC ADVANTAGES

- While properly mixing crop residue and increasing soil organic matter, the Speed-Tiller high-speed disk **delivers a more level, uncompacted soil profile and smoother seedbed floor.**
- Proper **residue cutting and mixing** contributes to healthier soil, encourages water and nutrient penetration, as well as plant growth.
- The **smooth subsurface maximizes planter productivity** to place seeds at the desired depth and spacing. This helps to achieve uniform germination, rapid emergence and increased yields.

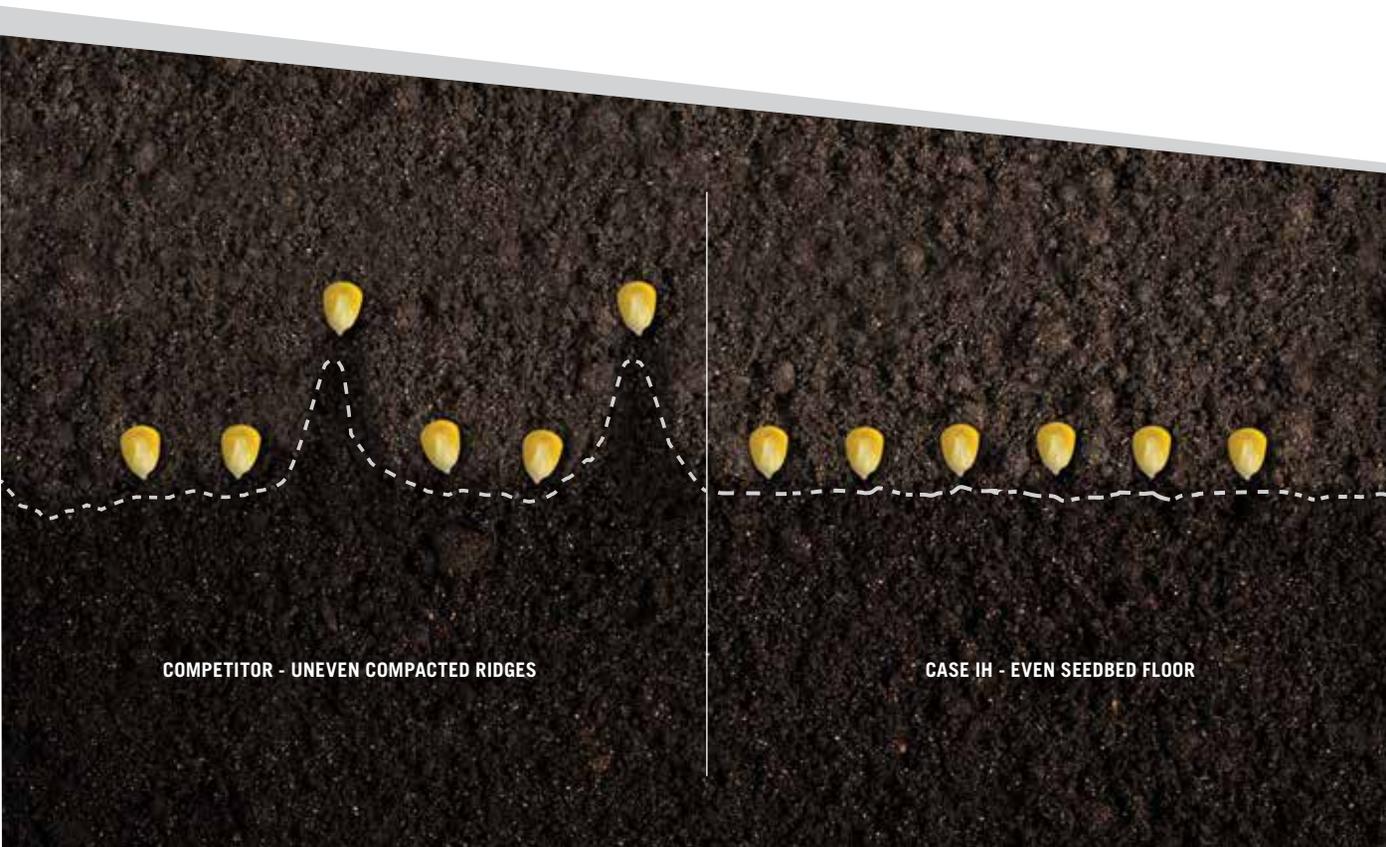

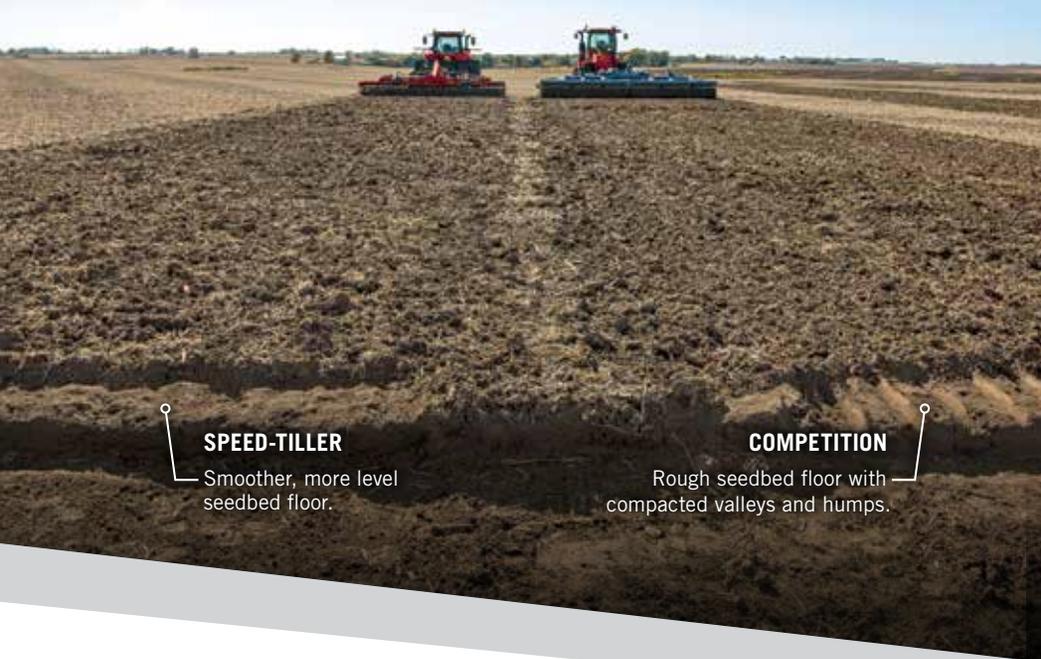


SPEED-TILLER

Smoother, more level seedbed floor.

COMPETITION

Rough seedbed floor with compacted valleys and humps.

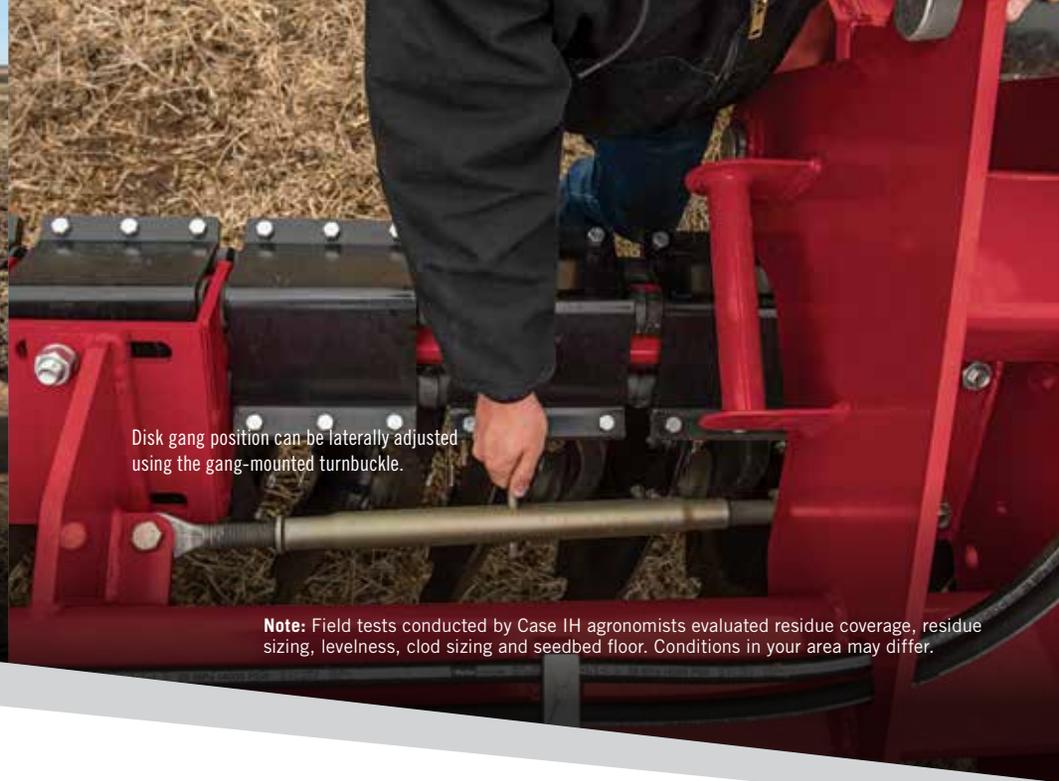

Disk gang position can be laterally adjusted using the gang-mounted turnbuckle.

Note: Field tests conducted by Case IH agronomists evaluated residue coverage, residue sizing, levelness, clod sizing and seedbed floor. Conditions in your area may differ.



THE ONLY AGRONOMICALLY CORRECT HIGH-SPEED SEEDBED

Every Case IH soil management tool must contribute to delivering agronomic performance to earn the Agronomic Design badge — but that designation doesn't come easy. Extensive multi-season field tests conducted by Case IH agronomists proved the Speed-Tiller high-speed disk to be the **only agronomically correct machine of its kind on the market**. In field tests, competitive disks proved to only work some of the soil, while the Speed-Tiller worked the entire soil profile. The Speed-Tiller thoroughly tills the soil while cultivating weeds, aerating the soil and mixing residue. It creates a smoother, more level subsurface floor, complementing accurate seed placement and young root development.


DIGS LIKE A DISK – FINISHES LIKE A FINISHER

- In fall, set the Speed-Tiller to run deeper (3 to 6 inches) while the **exclusive** constant level adjustment puts usable weight on the blades to penetrate the hardest soil conditions.
- In spring, work at shallower depths and choose from **three conditioner options** to meet the needs of different soil types and conditions.
- Hydraulically positioned conditioner allows the operator to lift the conditioner roller in muddy conditions. A mechanically adjusted conditioner option is also available for simple and easy adjustment of pressure.

SOIL QUALITY FOR STAND AND PLANT PERFORMANCE

- Maximizing yield potential starts with soil quality — Case IH research has shown that growers can **dramatically reduce the risk of emergence problems** in the spring by reducing both clod and valley sizes out the back of a tillage pass.
 - The Speed-Tiller delivers aggressive residue sizing and mixing for more **rapid nutrient cycling**, effectively handling today's realities of high plant population, tough Bt corn residue and earlier planting dates.
- Below the surface of the soil, competitive high-speed disks often create compacted ridges due to the angle and positioning of the front and rear blades.
 - Compacted ridges can hurt young seedling growth and development and lead to inconsistent emergence — impacting yields.

CLOD SIZE AND SURFACE FINISH

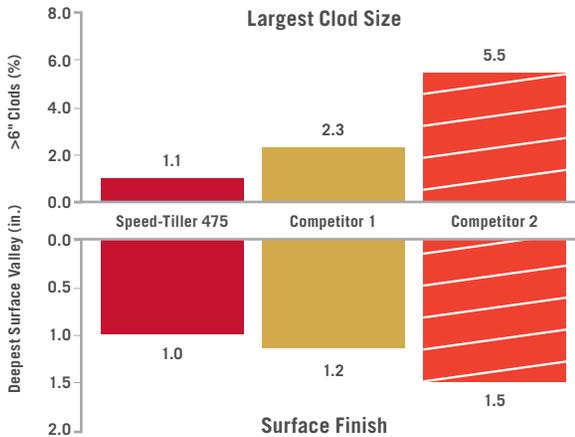

Case IH field tests have proven that the Speed-Tiller high-speed disk delivers industry-leading clod sizing and creates a smoother field finish compared to competitors.

YOUR SPEED – YOUR CONDITIONS

- Designed to create a high-efficiency seedbed at a wide range of speeds and in nearly every field condition.
- Unlike competitive high-speed disks, the Speed-Tiller can perform in tough field conditions that don't allow for high speeds.
- The Speed-Tiller high-speed disk is designed with proper blade indexing and backside pressure to **effectively eliminate** ridges and grooves below the surface. This design contributes to smoother subsurface floor and more **consistent, uniform emergence**.

- Standard 1.25-inch-thick disk arms are the heaviest and strongest on the market — nearly **double the thickness** of competitive units.
- Five-bolt disk bearings and hubs use unitized double taper roller bearings and a seven-lip cartridge seal for superior reliability and longer use.
- Single-point depth adjustment for both machine depth and level allows for ease of use, regardless of field conditions.

ROBUST, RUGGED DESIGN

- Rugged frame is built and proven to withstand some of the hardest soil conditions.

RIGID-MOUNTED CONFIGURATIONS

- The Speed-Tiller 465 provides unmatched agronomic benefits in a **compact, cost effective option** that is ideal for specialty and diversified operations.
- Heavy duty, robust and reliable, the rigid-mounted model comes in a range of sizes to accommodate your tractor horsepower needs.

Independently mounted 1.25-inch-thick disk arms and indexed blades work the entire soil profile.



AGRONOMIC DESIGN. PRODUCTIVE PERFORMANCE

Just like you work to make sure every inch of your fields are prepped for productivity, every inch of the Speed-Tiller high-speed disk is thoughtfully designed and precisely engineered with agronomics in mind. Each component and feature works in harmony to create a high-efficiency seedbed.

CONDITIONER ATTACHMENT OPTION

Choose from three attachment options to help you achieve a field finish that fits your soil management practices:

- Round bar crumbler roller
- Spring conditioner
- Rubber roller

BLADES

Uniquely formed and heat-treated, Case IH blades provide **exceptional endurance and break resistance** for longer equipment life. Blades are notched and available in two configurations to accommodate your soil conditions: 22-inch notched, shallow concavity or 24-inch notched, standard concavity.

HEAVY-DUTY DOUBLE TAPER ROLLER BEARING

Industry-leading, greaseless, heavy-duty disk bearing assemblies have superior durability and a five-bolt hub that uses double taper roller bearings meant for hard and tough conditions. A seven-lip seal between the bearing and hub provides extra protection from dirt and debris.



WING FLEX TORSION SYSTEM

Exclusive design allows for wing flexibility (7 degrees up/7 degrees down) yet provides adequate down pressure to achieve maximum soil penetration. (27/31/41' only)

HYDRAULIC CONDITIONER ROLLER

Stay productive with the ability to lift the conditioner roller in muddy conditions. Unique rubber torsions provide **protection and flexibility** to follow the ground contour to provide a high-efficiency seedbed finish.

SINGLE-POINT DEPTH ADJUSTMENT

Regardless of field conditions, adjustments for both machine depth and levelness are quick and easy to make.

CONSTANT LEVEL HITCH SETTING

Exclusive Constant Level Hitch setting puts useable weight on the blades for superior penetration.

INDEXED, INDEPENDENTLY MOUNTED BLADES

Exclusive indexed, independently mounted blades are laterally adjustable to work the entire soil profile. Rear blades are perfectly positioned to eliminate compacted valleys and humps below the soil surface.



EASY TRANSPORT

Narrow transport widths make it possible to get from field to field faster. Choose from trailing or rigid-mounted configurations to fit your operation size and horsepower range.

HEAVY-DUTY RUBBER TORSIONS

Made of high-density rubber, this industry-leading torsion system allows blades to hold their position through rough conditions at a range of speeds — and are malleable enough to lift and travel over rocks and other obstructions. Adding to the ruggedness, the 2-inch thick torsions are mounted with six bolts to ensure optimal spacing and indexing.

ROBUST DISK ARMS

Exclusive 1.25-inch-thick disk arms come standard and are the heaviest and strongest on the market — nearly double the thickness of competitive units. The disk arms are also rounded and formed to match blade concavity and provide maximum residue throughput.

RUGGED FRAME

Built for the harshest farming conditions and high speeds, the disk arms are mounted on 4-inch square tubing while most competitors can be 25% smaller in size.



THE AFS CONNECT FARM APP

View and monitor your equipment and field information in one place, all on your mobile device or tablet.



PRODUCTIVITY, CONNECTIVITY AND PROFITABILITY

Understanding every aspect of your operation is the key to improving your bottom line. With AFS Connect™, **view your equipment data and agronomic layers in one place** to help you make informed decisions—both in the planning stages for the year and those critical in-season pivots. Plus, with the AFS Connect app, you can successfully **manage your operation anytime, anywhere.**

PLAN YOUR SEASON

Having every pass planned before the year starts can help when it's time to get to the field to begin the work.

- **Review previous years' data** to develop your approach for a new season.
- Develop tillage prescriptions for AFS Soil Command™-equipped tools to **work every acre exactly how you want.**
- Send **field data, guidance lines and prescriptions** to connected equipment.

WORK SMARTER BY TRACKING EQUIPMENT

Knowing the status of all your equipment helps you **cover more acres in a day.**

- **Track equipment location** with minute-by-minute updates to plan your next move.
- Receive **push notifications when a tractor enters or exits a set geofence** for up-to-date status on job completion.
- View and compare machine information, such as operating speed and fuel usage, to learn how machines are being used in the field.
- **Access the AFS Pro 1200 display remotely** with Remote Display Viewing to coach operators through setup and operation.

KEEP MOVING IN SEASON

Using all the tools available to you keeps **your operation running at top speed.**

- **Create scouting reports** through the AFS Connect mobile app to keep an eye on certain areas all season long.
- With AFS Connect-equipped machines, **add AFS AccuSync™ to share machine data in field,** reducing skips and overlaps.
- **View and share reports** and other relevant information with your landlord, agronomic consultant or Case IH dealership.

MODEL	SPEED-TILLER 465 RIGID MOUNTED										SPEED-TILLER 475 TRAILING			
CONFIGURATION														
Operating Width	5.7 ft. (1.75 m)	6.5 ft. (2 m)	7.4 ft. (2.25 m)	8.2 ft. (2.5 m)	9.8 ft. (3.0 m)	11.5 ft. (3.5 m)	13.1 ft. (4.0 m)	14.8 ft. (4.5 m)	18 ft. (5.5 m)	20.5 ft. (6.25 m)	27 ft. (8.25 m)	31.2 ft. (9.5 m)	41 ft. (12.5 m)	
TRACTOR REQUIREMENTS														
Engine HP Range	70–90 hp (50–75 kW)	80–95 hp (60–71 kW)	80–105 hp (60–80 kW)	90–120 hp (66–88 kW)	110–140 hp (81–103 kW)	130–150 hp (96–110 kW)	150–220 hp (110–162 kW)	210–270 hp (154–199 kW)	260–290 hp (191–213 kW)	240–340 hp (179–254 kW)	320–400 hp (238–298 kW)	350–500 hp (260–372 kW)	425–600 hp (317–447 kW)	
Remote Hydraulic Valves	N/A									4 (Fore/Aft Tilt, Main Lift, Wing Fold, Crumbler circuit)			5 (Fore/Aft Tilt, Main Lift, Wing Fold, Crumbler, Hyd. Jack)	
Hydraulic Pressure	N/A									2,800 psi (19 000 kPa)				
OVERALL MACHINE														
Transport Width*	6.9 ft. (2.05 m)	7.8 ft. (2.35 m)	8.1 ft. (2.5 m)	9.6 ft. (2.9 m)	11.2 ft. (3.4 m)	12.7 ft. (3.9 m)	14.2 ft. (4.4 m)	15.9 ft. (4.9 m)	19.4 ft. (5.9 m)	9.6 ft. (2.9 m)	10.7 ft. (3.2 m)	12.6 ft. (3.8 m)	15.7 ft. (4.8 m)	
Transport Height	N/A									11.8 ft. (3.6 m)	12.2 ft. (3.7 m)	13.1 ft. (4 m)		
Weight**	3,263 lb. (1 480 kg)	3,375 lb. (1 532 kg)	3,629 lb. (1 646 kg)	3,947 lb. (1 790 kg)	4,516 lb. (2 048 kg)	5,195 lb. (2 356 kg)	6,205 lb. (2 814 kg)	7,654 lb. (3 472 kg)	9,233 lb. (4 188 kg)	16,535 lb. (7 500 kg)	21,300 lb. (9 660 kg)	27,250 lb. (12 360 kg)	35,650 lb. (16 170 kg)	
Depth Control	N/A									Cylinder stops for Wheels and Rollers and single point depth control for fore/aft tilt		Separate single point depth control for Wheels and fore/aft tilt		
Wing Down Pressure	N/A										Hydraulic down pressure w/ heavy duty rubber torsion system			
GANGS AND BLADES														
Blade Mounts	Individually mounted, heavy duty 1 1/4 in. (32 mm) thick arm with 2 in. (51 mm) high density rubber torsion system; lateral front gang adjustment													
Blade Bearings	Greaseless heavy duty double taper rolling bearing													
Blade Spacing	10 in. (250 mm) spacing on each gang; 5 in. (125 mm) effective cut spacing													
Blade Diameter (Standard / Optional)	Std. 22 in. (559 mm) shallow concavity blades / Opt. 24 in. (610 mm) std. concavity blade									Std. 24 in. (610 mm) std. concavity blades / Opt. 22 in. (559 mm) shallow concavity blade				
Blade Thickness	6 mm (0.236 in.)													
Blade Design	Serrated front and rear blades													
Number of Blades	14	16	18	20	24	28	32	36	44	50	66	76	100	
WHEELS AND TIRES														
Main Frame (Standard / Optional)	N/A									Qty. 2: 560/45 × 22.5	Qty. 2: 600/50R22.5	Qty. 2: 600/50R22.5 GY flotation tires / Qty. 2: 425/65 × 22.5	Qty. 4 Rigid: 600/50R22.5 GY flotation tires / Qty. 4 Rigid: 425/65 × 22.5	
Wing Frame (Standard / Optional)	N/A									Mechanically adjusted Stabilizer Wheel - 400/60 × 15.5 (Qty. 1 per wing)		Qty. 2 (one per wing): 600/50R22.5 GY flotation tires / Qty. 2 (one per wing): 425/65 × 22.5		
REAR ATTACHMENTS														
Mounting (Standard / Optional)	Mechanically positioned with heavy duty rubber torsion and heavy duty bearings / Hydraulically positioned with heavy duty rubber torsion with heavy duty bearings (14.8 ft. (4.5 m) & 18 ft. (5.5 m) only)									Hydraulically positioned with heavy duty rubber torsion system and heavy duty bearings / Mechanically positioned with heavy duty rubber torsion system and heavy duty bearings				
Crumbler	16.5 in. (420 mm) diameter with 1-3/16 in. (30.2 mm) rifled round bar crumbler						19 in. (480 mm) diameter with 1-7/16 in. (36.5 mm) rifled round bar crumbler							
Rubber Roller	N/A									21 in. (533 mm) diameter rubber roller with mud scrapers				
Spring	22 in. (550 mm) diameter heavy duty steel spring roller													

*Transport widths are approximate due to front tool bar slide adjustment. **Weights listed are for standard units, they can vary according to disk and roller options.



caseih.com

SAFETY NEVER HURTS!™ Always read the Operators Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs, and use any safety features provided. CNH Industrial America LLC reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions and illustrative material herein are as accurate as known at time of publication, but are subject to change without notice. Availability of some models and equipment builds varies according to the country in which the equipment is used.

©2023 CNH Industrial America LLC. All rights reserved. Case IH is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH Industrial America LLC, are the property of those respective companies. Printed in U.S.A. www.caseih.com CIH23020702

CASE IH