



## ENGINE

Model	F5BFL413D*C009
Emissions Certification	Tier 4 Final
Type	Diesel 4-stroke, Turbo, D.I.
Cylinders	4
Bore/Stroke	3.9 x 4.3 in (99 x 110 mm)
Displacement	207 in <sup>3</sup> (3.4 L)
Fuel injection	Direct, high pressure common rail – HPCR
Fuel	#2 Diesel
Fuel filter:	
Pre-filter	Beta (30) = 200/spin-on
Main filter	Beta (4) = 20/spin-on
Air intake	Turbocharged w/ waste gate and external cooled EGR
Exhaust aftertreatment	Selective Catalytic Reduction (SCR)
Cooling	Liquid
Engine speeds	RPM
High idle – no load	2,500 +/- 25
Rated – full load	2,500
Low idle	1,150 +/- 25
Horsepower @ 2,500 RPM – SAE J1349:	
Gross	90 hp (67 kW)
Net	84 hp (63 kW)
Peak torque @ 1,400 RPM	282 lb-ft (383 N·m)
Radiator:	
Core type	Aluminum bar and plate
Core size area	319 in <sup>2</sup> (.206 m <sup>2</sup> )
Rows of tubes x columns	21 rows
Cap pressure	16 +/- 2 psi (1.1 +/- 0.14 bar)
Fan:	
Diameter	22 in (560 mm)
Ratio	0.96:1 standard, 1.1:1 high-flow
Water pump:	
Style	Centrifugal
Flow	47.8 gpm (181 L/min)
Engine lubrication pump:	
Rotor pump w/ deep sump pan, plate cooler and pressurized under-piston nozzles	
Pump operating angle ratings:	
Side to side	45°
Bucket up	35°
Bucket down	45°

## LIFT GEOMETRY

Vertical lift

## DRIVETRAIN

Drive pump controls	Servo-assist mechanical
Pump to engine ratio	1:1
Displacement	2.81 in <sup>3</sup> (46 cm <sup>3</sup> )
Flow @ rated engine RPM:	
@ 97% efficiency	29.4 gpm (111 L/min)
Charge pressure	360 psi (24.5 bar)
System relief pressure	5,220 psi (360 bar)
Drive pump controls	Electro-hydraulic
Pump to engine ratio	1:1
Displacement	2.75 in <sup>3</sup> (45 cm <sup>3</sup> )
Flow @ rated engine RPM:	
@ 97% efficiency	28.8 gpm (109 L/min)
Charge pressure	362 psi (24.5 bar)
System relief pressure	5,220 psi (360 bar)
Drive motors:	
Max. displacement	3.1 in <sup>3</sup> (50.9 cm <sup>3</sup> )
Displacement:	
High speed	2.02 in <sup>3</sup> (33.1 cm <sup>3</sup> )
Motor RPM @ high idle and 97% efficiency:	
2-speed	156
Motor torque @ max. displacement and relief pressure, calculated @ 5,220 psi (360 bar):	4,654 lb-ft (6 310 N·m)
Travel speed:	
Low range	5.5 mph (8.9 kph)
High range	8 mph (12.9 kph)
Final drive:	
Planetary gearbox w/ 2-speed motor	
Tractive effort	7,414 lb (3 370 kg)
Parking brake:	
Type	Spring-applied, hydraulic release multiple disc.
Engagement	Depress on/off brake button on handle or instrument panel, raise seat bar, get off seat or stop engine.

## ELECTRICAL

Alternator	160 amp
Starter	4.29 hp (3.2 kW)
Battery	12-volt low-maintenance 1,000 cold-cranking amps @ 0° F (-18° C°)

## OPERATOR ENVIRONMENT

ROPS/FOPS Level 1 canopy w/ side screens; Keyed start ignition; Tilt ROPS/FOPS; Rear window w/ emergency escape; Suspension seat, vinyl w/ 2 in (51 mm) retractable 3 point lap seat belt; Hand and foot throttles; Alarm package – back-up and horn; Rearview mirror; Headliner; dome light; Top window; Cup holder; 12V Power plug socket; Foot rest; Seat pocket; Padded seat bar w/ integral armrests; Loader control lockout system; Electric parking brake control; Operator's compartment floor cleanout; Proportional

auxiliary hydraulic control – on joystick; Advanced instrument cluster w/ digital hour meter, tachometer, Fuel level LCD bar graph w/ alarm, diagnostic features and security lockout; Electro-hydraulic controls: For drive/steering, loader functions, Switchable between H and ISO patterns, Adjustable sensitivity of controls.

Warning lights w/ alarms:

Engine coolant temperature; Engine oil pressure; Engine malfunction; Hydraulic charge pressure; Hydraulic filter restriction; Hydraulic oil temperature: Critical system stop, Engine system, Hydraulic system, Electrical and diagnostic system.

Warning alarms:

Battery voltage – plus display; Oil service.

Indicator light:

Engine preheat; Parking brake;  
Seat bar reminder.

## OPERATING WEIGHT

Unit equipped w/ open cab; 165 lb operator; 78 in Heavy-duty bucket; full of fuel:	10,610 lb (4 823 kg)
Shipping weight	10,267 lb (4 667 kg)
Add-on weights:	
Side cab glass	47 lb (21.3 kg)
Polycarbonate cab door	75 lb (34 kg)
Glass cab door w/ wiper	75 lb (34 kg)
Suspension seat	22 lb (10 kg)
Additional counterweight	600 lb (273 kg)

## HYDRAULICS

Implement pump type	Gear
Displacement:	
Standard aux.	2.23 in <sup>3</sup> (36.6 cm <sup>3</sup> )
High-flow aux.	1.42 in <sup>3</sup> (23.3 cm <sup>3</sup> )
Standard flow @ rated engine RPM: @ 100% efficiency	24.2 gpm (91.5 L/min)
Optional high-flow @ rated engine RPM: @ 100% efficiency	39.5 gpm (149 L/min)
Enhanced high-flow @ rated engine RPM: @ 100% efficiency	35 gpm (132.5 L/min)
Loader control valve:	
Type	3 spool/open center/series – series
Relief pressure	3,450 psi (238 bar)
Port relief pressures:	
Loader raise	3,625 psi (250 bar)
Bucket curl	3,916 psi (270 bar)
Bucket dump	3,625 psi (250 bar)
Hydraulic lines:	
Tubing	ORFS + 37° JIC Flare
Loop hoses	SAE 100 R19
Hydraulic oil cooler:	
Number of fins	10 per in (3.94 per cm)
Number of tube rows x columns	9 bar/plate
Area	138.7 in <sup>2</sup> (890 cm <sup>2</sup> )
Hydraulic filter	Beta (4) = 75/spin-on

## HYDRAULICS CONT.

<b>Lift cylinders:</b>	
Bore diameter	2.75 in (69.85 mm)
Rod diameter	1.75 in (44.5 mm)
Stroke	35.7 in (908 mm)
Closed length	53.9 in (1 369 mm)
<b>Bucket cylinders:</b>	
Bore diameter	3 in (76.2 mm)
Rod diameter	1.5 in (38.1 mm)
Stroke	15.9 in (405 mm)
Closed length	24.3 in (617 mm)



## SERVICE CAPACITIES

Fuel Tank	25.5 gal (96.5 L)
Engine oil w/ filter	8.9 qt (8.5 L)
<b>Hydraulic system:</b>	
Reservoir	6 gal (22.7 L)
Total	11.9 gal (45.4 L)
Diesel Exhaust Fluid (DEF) Tank	2.8 gal (10.7 L)

## PERFORMANCE SPECS

<b>Rated operating capacity – ROC*:</b>	
35% of tipping load	3,150 lb (1 432 kg)
50% of tipping load	4,500 lb (2 045 kg)
w/ additional counterweight	4,700 lb (2 135 kg)
Tipping load*	9,000 lb (4 091 kg)
<b>Breakout forces @ 3,150 psi (217 bar)*:</b>	
Bucket Cylinders	9,188 lb (41.8 kN)
Lift cylinders – hydraulic limit	7,773 lb (35.3 kN)
<b>Cycle times:</b>	
Raise	5.1 sec
Lower	3.5 sec
Dump	2.7 sec
Roll back	2 sec

NOTE: \*Measured using 78 in (1.98 m) heavy-duty bucket.

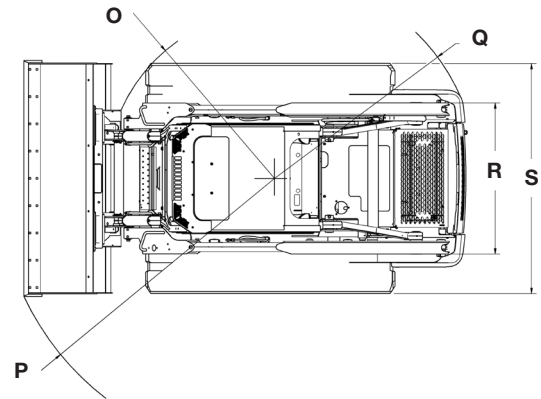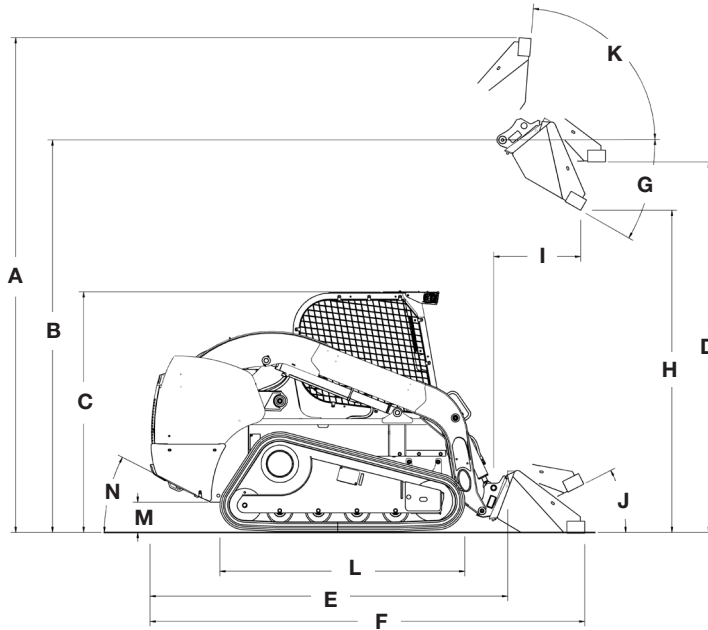

Line drawings are for illustrative purpose only and may not be exact representation of unit.

## DIMENSIONS

<b>A.</b> Overall operating height:	
w/ foundry/excavating bucket	161.4 in (4.1 m)
w/ heavy-duty bucket	165.6 in (4.21 m)
w/ low profile extended bucket	170.4 in (4.33 m)
<b>Height to:</b>	
<b>B.</b> Bucket hinge pin	131.6 in (3.34 m)
<b>C.</b> Top of ROPS	80.4 in (2.04 m)
<b>D.</b> Bottom of level bucket, fully raised	123.2 in (3.13 m)
<b>Overall length:</b>	
<b>E.</b> w/o attachment w/ coupler	120.2 in (3.05 m)
<b>F.</b> w/ foundry/excavating bucket on ground	144.4 in (3.67 m)
w/ heavy-duty bucket	148.6 in (3.78 m)
w/ low profile extended bucket	153.5 in (3.89 m)
<b>G.</b> Maximum dump angle	45.3°
<b>H.</b> Dump height:	
w/ foundry/excavating bucket	104.1 in (2.65 m) @ 45°
w/ heavy-duty bucket	101.1 in (2.57 m) @ 45°
<b>I.</b> Dump reach at maximum height w/ low profile extended bucket	35.1 in (.89 m) @ 45°
<b>Maximum attachment rollback:</b>	
<b>J.</b> Bucket on ground	32°
<b>K.</b> Bucket at full height	83.1°
<b>L.</b> Track on ground	64.5 in (1.64 m)
<b>M.</b> Ground clearance – bottom of belly pan	9.5 in (.24 m)
<b>N.</b> Angle of departure	32°
<b>Clearance circle:</b>	
<b>O.</b> w/o bucket	57.7 in (1.47 m)
<b>P.</b> w/ 78 in (1.98 m) foundry/excavating bucket on ground	87.8 in (2.23 m)
<b>Q.</b> Clearance circle rear	68.6 in (1.74 m)
<b>R.</b> Track gauge	58.6 in (1.49 m)
<b>S.</b> Over the track width	76.5 in (1.94 m)

**TRACK SELECTION**

Type	Area	Ground Pressure	Width to Outside Track
17.7 in (450 mm)	2,286 in <sup>2</sup> (1.48 m <sup>2</sup> )	4.6 psi (31.7 kPa)	76 in (1.93 m)

**OPTIONAL BUCKETS**

Type	Width	Weight	Heaped Capacity
Dirt and Foundry	78 in (1.98 m)	440 lb (200 kg)	17.7 ft <sup>3</sup> (.5 m <sup>3</sup> )
Low Profile Extended	78 in (1.98 m)	540 lb (245 kg)	19.1 ft <sup>3</sup> (.54 m <sup>3</sup> )
	84 in (2.13 m)	575 lb (262 kg)	20.5 ft <sup>3</sup> (.58 m <sup>3</sup> )
Light Material	84 in (2.13 m)	540 lb (245 kg)	27.5 ft <sup>3</sup> (.78 m <sup>3</sup> )
Heavy-Duty	78 in (1.98 m)	530 lb (240 kg)	15.5 ft <sup>3</sup> (.44 m <sup>3</sup> )
	84 in (2.13 m)	550 lb (250 kg)	17 ft <sup>3</sup> (.48 m <sup>3</sup> )
Heavy-Duty Extended w/ SmartFit™ Bucket Teeth	78 in (1.98 m)	697 lb (316 kg)	18.9 ft <sup>3</sup> (.54 m <sup>3</sup> )
	84 in (2.13 m)	728 lb (330 kg)	20.5 ft <sup>3</sup> (.58 m <sup>3</sup> )

## STANDARD EQUIPMENT

### OPERATOR ENVIRONMENT

See page 1

### ENGINE

Dual element air cleaner  
Organic Acid Technology (OAT)  
Anti-freeze solution to -34° F  
Fuel tank – 25.5 gal (U.S.)  
Over and under radiator and oil cooler  
3-stack after cooler/radiator/oil cooler configuration  
Glow plugs  
Integral engine oil cooler  
Fuel filter w/ water trap  
1,000 CCA 12V battery  
Master electrical disconnect  
Jump start terminal

### DRIVETRAIN

2-speed hydrostatic  
SAHR disc parking brake

## OPTIONAL EQUIPMENT

### OPERATOR ENVIRONMENT

Enclosed cab:  
Fully sealed and pressurized – FSP  
Glass door w/ wiper and washer  
Sliding side windows – removable  
Ventilation system w/ integrated heater  
Heater and air conditioner  
AM/FM Bluetooth® radio w/ 2 speakers and USB port  
Keyless start ignition  
8 in Color LCD display  
Economy mode (auto idle shutdown)  
Auto engine protection shutdown  
Mechanical hand controls  
Hand and foot controls:  
Hand controls the loader drive function and foot controls the bucket and boom  
Deluxe cloth, air suspension seat, w/ heater and lumbar support  
Demolition cab door w/ polycarbonate  
Ignition timeout  
Machine settings user access levels  
Operator security codes  
Auto idle settings

### HYDRAULICS

Auxiliary hydraulics:  
@ 3,450 psi (238 bar) – 24.2 gpm (91.5 L/min)  
6 micron oil filtration system  
3-spool loader control valve  
Auxiliary hydraulic disconnects, ISO flat-face – connect-under-pressure w/ case drain  
Hydraulic circuit pedal lock  
Auxiliary function lockout override  
Loader lift lockout override  
Heavy-duty hydraulic oil cooler  
Loader arm float position  
Loader function lockout system

### LOADER

Manual attachment coupler  
Vertical lift geometry  
Loader lift arm support strut  
SAE operating load: 3,150 lb  
Tipping load: 9,000 lb

### TRACKS

Rubber tracks

### OTHER STANDARD FEATURES

LED lights – 2 front, 2 side, 2 rear flood  
Pre-wired for rotating beacon  
Lockable service access hood  
Single-point daily servicing  
Rear tail lights  
Remote oil and fuel filters  
Block heater  
Debris ingress sealing  
Mounting points for add-on counterweights

### TELEMATICS

MyCASEConstruction Telematics – Includes hardware and 7-Year data subscription  
SiteConnect module providing remote diagnostics capability

### HYDRAULICS

High-flow auxiliary hydraulics – combined:  
@ 3,450 psi (238 bar) – 39.5 gpm (149 L/min)  
Enhanced high-flow auxiliary hydraulics – EHF:  
@ 4,000 psi (276 bar) – 35 gpm (132.5 L/min)  
Second auxiliary hydraulics  
Hydraulic one-way self-leveling  
Ride control

### LOADER

Auxiliary front electric control  
Hydraulic attachment coupler

### DRIVETRAIN

Creep speed mode (for EH machines only)  
EZ Trac – suspension track w/ bogey wheel design

### FACTORY SUPPLIED ATTACHMENTS

Rotating beacon  
Four point lift hook  
48 in (1.22 m) pallet forks

### SERVICE PARTS

Add-on counterweights  
Road lights  
Four-corner LED strobe  
Single point lift hook  
Aspirator  
Precleaner  
3 in (76.2 mm) retractable seat belt  
Bolt-on heavy-duty bucket teeth

### OTHER

Language decals  
Buckets – see page 3  
Bolt-on bucket cutting edges  
Bolt-on heavy-duty bucket spill guard  
Special paint  
Offsite service arrangement

CaseCE.com

©2026 CNH Industrial America LLC. All rights reserved. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Capital is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Printed in U.S.A. Contains 10% post-consumer fiber.

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.



CASE Construction Equipment is biodiesel-friendly. NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.



Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.

Form No. CCE202605TV450B

Replaces Form No. CCE202310TV450B

TV450B

4 of 4