

# AXIAL-FLOW® 260 SERIES

CLASS 7, 8, & 9 COMBINE  
SPECIFICATIONS



AXIAL-FLOW 260 SERIES CLASS 7, 8, & 9 COMBINE SPECIFICATIONS

**CASE IH**

**CASE IH**





# AXIAL-FLOW 260 SERIES

3 Models | Class 7, 8, & 9

## YOUR POWERFUL HARVESTING PARTNER

Axial-Flow 260 series combines are technology beasts. Our Pro 1200 dual displays give you unprecedented insight into every aspect of harvest, all at your fingertips. Harvest Command™ combine automation optimizes your harvest to deliver more grain in the tank. RowGuide Pro™ helps control movement through the field. And there's more. We have taken the guesswork out of our technology. It comes standard with the machine without the need for additional activations or subscriptions.

Experience a new level of performance and productivity with the Axial-Flow 260 series combines.

**“We’ve been big believers in Case IH combines because Axial-Flow combines have always done well in our high yielding conditions, and they perform well... All the things that they developed in the Pro 1200 series are a far improvement over what we’ve had in the past for the ability to control the machine and monitor data on the go.”**

**Kurt Druffel**, Norm Druffel & Sons Farms, Idaho





**AXIAL-FLOW 260 SERIES COMBINE**

Technology To Drive Your Harvest Forward ..... 4-5

A Window To Your Harvest World ..... 6-7

Take Control With Harvest Command™ ..... 8-9

Options To Handle The Toughest Conditions ..... 10-11

Product Specifications ..... 12





# TECHNOLOGY TO DRIVE YOUR HARVEST FORWARD

At Case IH, we worked with our customers to build a machine that links the latest in harvest technology with a purposeful design to take your harvest to the next level. Each technological advancement in the Axial-Flow 260 series combine is seamlessly integrated into its operation. For you, it means a harvest like no other.

## PRO 1200 DUAL DISPLAYS

A wealth of harvest data is displayed on two high resolution, high visibility displays. Tailor information on your screen to view the harvest activity that's important to you by using a fully customizable display setup. Key information is at your fingertips in an easy-to-navigate menu. Using Remote Display Access, trusted partners can view display information remotely.

## CASE IH HARVEST COMMAND

Take control of your harvest with Harvest Command. Using advanced sensors strategically located throughout the combine, Harvest Command automatically adjusts settings to ensure an efficient harvest.

## ROWGUIDE PRO

Advanced sensor technology lets the Axial-Flow 260 series combine maneuver through even the most challenging fields with ease. Redesigned RowGuide Pro removes manual corrections and interventions by combining GPS and advanced software for seamless row tracking, even if farmers run out of stalks to guide. An enhanced steering system ensures smooth and efficient movement through the field.





### **ACTIVETRAC**

The all-new ActiveTrac four-roller hydraulic suspended track system boasts a wider footprint to increase flotation by 14 percent, reducing compaction and ensuring a smoother ride. Proactive sensors constantly adjust the drive system to maintain optimal weight distribution and movement through the field.

### **PROVEN AXIAL-FLOW TECHNOLOGY**

Single-rotor technology and self-leveling cleaning increases throughput, gently handles grain and eases maintenance chores.

### **COMFORT IN THE DRIVER'S SEAT**

Technology comes with comfort for every operator. Temperature-controlled luxury seats with a massage function help ensure a smooth ride during those long harvest hours.

### **CASE IH FIELDOPS**

We have taken our industry-leading operations management solutions to the next level with Case IH FieldOps. We have streamlined workflows, updated interfaces and improved connectivity to allow you access to data anytime, anywhere.

### **TAILOR YOUR TECHNOLOGY**

Ensuring your machine has the right technology to fit your needs is important. Our best technology comes standard on your machines with additional packages available for easy ordering so nothing is forgotten. And know that your technology is yours without the hassle of yearly subscriptions or additional activations.





# A WINDOW TO YOUR HARVEST WORLD

Pro 1200 dual displays give you an unmatched view of every aspect of the Axial-Flow 260 combine operation. Two high resolution, high visibility displays feature instant grain quality imaging for a real-time, high-definition look at harvested grain on the displays.

Working with our customers, we developed the entire operating experience for easy navigation among key functions. Customize what you want to see in the display windows to monitor key machine function or harvest information that is important to you.

Remote diagnostics let you share critical machine information with your trusted equipment technicians for immediate diagnostics to help keep you in the field.







### **ON-ROW AND ON-TARGET**

The Axial-Flow 260 combine merges technology with function. Our RowGuide Pro combines GPS with advanced sensor technology for seamless row tracking, even in the most challenging harvest conditions.

Enhanced steering ensures increased accuracy while moving through the field, keeping your harvest on-row and on-target.

For the operator, it means more time focusing on the grain moving to the tank. Less stress in the field means a smoother, more productive harvest.





# OPTIONS TO HANDLE THE TOUGHEST CONDITIONS

## NEW SUSPENDED ACTIVETRAC SYSTEM

The new ActiveTrac four-roller hydraulic suspended track system on the Axial-Flow 260 series combine offers a wider footprint, reducing compaction and increasing flotation by 14 percent over fixed-track models.

Sensors on the track system's cylinders constantly adjust to field conditions and grain tank load to ensure consistent flotation throughout the working day. It is a system developed by Case IH with proven performance in other markets. And now it is available on the Axial-Flow 260 series combine.

## AVAILABLE TRACK VERSIONS

To help widen your harvest window, the front axle of the 260 series combines can be equipped with the rugged, triangular Quadtrac® track system for **greater flotation and less soil compaction than wheeled models**. The Quadtrac design uses two 30- or 36-inch-wide rubber tracks to reduce ground pressure by 50% to 60%. This results in minimal soil disturbance, a smooth and comfortable ride and less stress on your fields.

## AVAILABLE CHROME EDITION

Designed for rice producers and adapted for corn and soybean producers, the Axial-Flow 260 series Chrome Edition combine is engineered to withstand the toughest and most abrasive conditions. It's an ideal solution for producers growing crops that are higher wear on the combine — like rice or high-moisture corn — and designed to help you stay productive through every harvest, season after season.



# TAKE CONTROL WITH HARVEST COMMAND

Harvest Command optimizes combine settings to ensure all your crop makes it out of the field. It is the most advanced harvest technology available that boosts productivity, enhances efficiency, and puts more grain in the tank during your harvest season.

Harvest Command automation proactively adjusts the combine as crop conditions change using exclusive, patented technology to help all operators, from rookie to seasoned veteran, run at peak efficiency.

## CHOOSE FROM FOUR MODES OF AUTOMATION TO FIT YOUR OPERATION

- **Performance:** Maximize grain savings and grain quality while optimizing throughput.
- **Grain quality:** Maximize grain quality while saving grain and optimizing throughput.
- **Max throughput:** The operator can maximize throughput while automation adjusts combine settings to save grain.
- **Fixed throughput:** The operator can fix the machine throughput, and the machine will adjust to save grain and maintain a quality sample.

Fine-tuning harvest settings and adjustments can test even the most experienced operator. **Harvest Command automation helps refine the harvesting process by reducing the number of functions you need to monitor in the cab from twelve to three.** With Harvest Command, you control concave clearance, header position, and grain tank unload while the automation system takes care of the rest.

## QUANTIFY YOUR PERFORMANCE


**Sensitivity adjustments let you fine-tune your combine to match specific harvest conditions.** Operators can easily dial-in rotor, sieve, grain quality or material other than grain settings to further boost Harvest Command performance.





# 16 SENSORS MONITORED BY HARVEST COMMAND

Harvest Command **automatically adjusts seven machine settings** (ground speed, rotor speed, cleaning fan speed, presieve, upper sieve, lower sieve, cage vane angle) **based upon 16 sensor inputs and comprehensive algorithms to maximize productivity and grain quality and to minimize losses.**

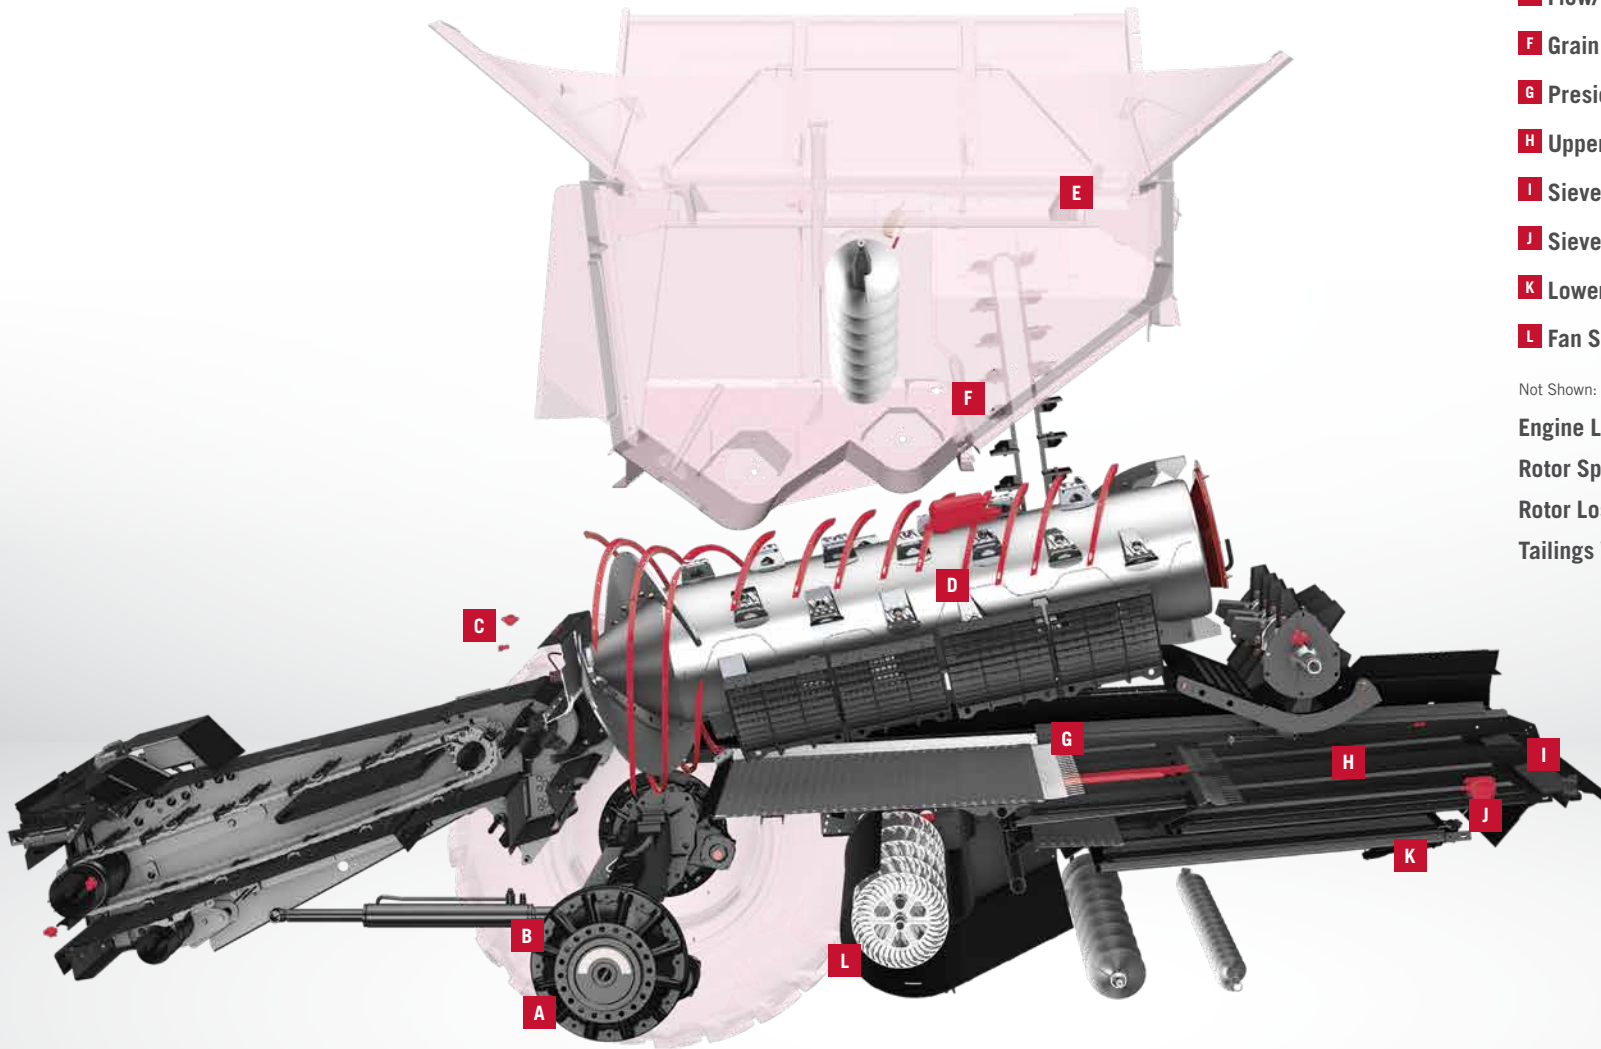

- A** Ground Speed Sensor
- B** Ground Drive Pressure Sensor
- C** Inclination Sensor
- D** Cage Vane Sensor
- E** Flow/Yield Sensor
- F** Grain Camera
- G** Presieve Position Sensor
- H** Upper Sieve Position Sensor
- I** Sieve Loss Sensor
- J** Sieve Pressure Sensors
- K** Lower Sieve Position Sensor
- L** Fan Speed Sensor

Not Shown:



- Engine Load Sensor
- Rotor Speed Sensor
- Rotor Loss Sensors
- Tailings Volume Sensor





## THE FIELDOPS APP

View and monitor your equipment and field information in one place, all on your mobile device or tablet.



# CASE IH FIELDOPS

High-Capacity harvesting requires state-of-the-art precision. Case IH precision technology offers a wide array of solutions to meet this demand.

## CASE IH FIELDOPS™

All AF series combines come with subscription-free Case IH connectivity, allowing you to share vital machine, field and crop data remotely, and even allows remote viewing of machine displays.

Case IH FieldOps is a comprehensive platform to manage your machine and agronomic data. The all-in-one FieldOps mobile app stores information from your entire connected fleet, providing one streamlined platform for all of your equipment. This cross-fleet compatibility puts all your equipment information in one place for all users. Get instant access to data and insights, including critical machine operating parameters, precise equipment location and work status, estimated time to complete task, and more.

Proactively monitor machine health, quickly spot high-priority issues, and receive customized notifications in an instant. Data can be viewed for any specific operating parameter over the course of a season, or over several seasons, to enhance operational efficiency.

## ROWGUIDE PRO™

All new RowGuide Pro merges GPS with advanced sensor technology for seamless row tracking, even through breaks in standing corn, like waterways. Enhanced steering ensures increased accuracy while moving through the field, keeping your harvest on-row and on-target. For the operator, it means less stress in the field and more time focusing on other aspects of your harvest.

## ACCUSYNC®

Be more efficient while getting more accurate real-time data. AccuSync allows multiple combines to share guidance lines and coverage data.

## ACCUGUIDE™

AccuGuide is a fully integrated autoguidance system that allows you to achieve sub-inch level accuracy and maintain accurate row positioning across different types of terrain and field conditions.

## YIELD AND MOISTURE MONITORING

Single point yield calibration provides greater, increased accuracy.



260 SERIES SPECIFICATIONS	AXIAL-FLOW 7260	AXIAL-FLOW 8260	AXIAL-FLOW 9260
COMBINE CLASS SIZE	CLASS 7	CLASS 8	CLASS 9
<b>ENGINE</b>			
Type - Tier V/Final	Case IH - FPT		
Displacement	11.1 L (677 cu. in.)	12.9 L (787 cu. in.)	16.0 L (970 cu. in.)
Horsepower (Rated /Maximum)	402 hp (299 kW) /468 hp (349 kW)	480 hp (358 kW) /555 hp (414 kW)	550 hp (410 kW) /625 hp (466 kW)
Power Rise	66 hp (49 kW)	75 hp (56 kW)	
Unload Boost - Power on Demand	66 hp (49 kW)	75 hp (56 kW)	
Fuel Tank /DEF Tank Capacity	297 gal. (1 124 L) /43 gal. (166 L)		317 gal. (1 200 L) /43 gal. (166 L)
<b>FEEDER</b>			
Feeder Width /Feeder Length w/o Rock Trap	54 in. (1 372 mm) /94 in. (2 388 mm)		
Feeder Drive Type /Reverser System	CVT drive /CVT hydraulic		
Head Lift Cylinders	2.95 in. (75 mm) /3.7 in. (95 mm)		
Lateral Tilt Range Optional	+/- 5 degrees		
Fore/Aft Faceplate Tilt Optional	12 degrees		
Stone Trap Optional	Spiral Beater/Sump		
<b>THRESHING/SEPARATING</b>			
Threshing Type	Rotary		
Rotor Drive Type /Rotor Diameter /Rotor Speeds	CVT Drive /30 in. (762 mm) /220 – 1180 rpm		
Number of Concave /Modules	2 pair		
Threshing /Separating Area Wrap	180° /180°		
Separating Grates /Modules	2 pair		
Discharge Beater Standard /Optional	Integral chopper /beater and chopper options available		
Auger Bed	No		
Active Grain Pan	Yes		
Grain Loss Monitor	Standard equipment		
Cage Vanes Standard /Optional	Manual adjust with turn buckle / In-cab adjustable		
<b>CLEANING SYSTEM</b>			
Cleaning System Width	62 in. (1 575 mm)		
Total Sieve Area	10,075 sq. in. (6.9 m <sup>2</sup> )		
Fixed or Self-leveling Cleaning System	Self-leveling		
Cleaning Capability % Slope (Degrees)	12.1% (7.0°)		
Sieve Louver Adjustment (In-cab /Manual)	Standard /N/A		
Cleaning Fan Type /Drive	Cross-Flow fan /hydraulic		
Fan Speed Range /Fan Diameter	300 – 1150 rpm /15.4 in. (391 mm)		
<b>CONVEYING AND STORAGE</b>			
Tailings Elevator	Tri sweep crop processor		
Clean Grain Elevator (Dimensions /Capacity)	11.9 x 10.4 in. (302 x 264 mm) /6,500 bu/hr.		
Grain Tank Capacity Standard /Optional	315 bu. (11 100 L) / 410 bu. (14 448L)	410 bu. (14 448 L)	
Unloading Auger Length	28 ft. 9 in. (8.8 m)		
Unloading Rate	4.0 bu. (141 L) per second	4.5 bu. (159 L) per second	
<b>DIMENSIONS</b>			
Wheel Base - 2WD Axle / Pra Opt.	147.7 in. (3 752 mm) /148.5 in. (3 772 mm) - PGA		
Width (Overall Single Tires 120-in. Tread)	152 in. (3 861 mm)	156 in. (3 962 mm)	
Minimum Weight (2WD and Single Drive Tires)	42,245 lb. (19 162 kg)	42,845 lb. (19 434 kg)	43,790 lb. (19 863 kg)
Typical Weight (2WD and Dual Drive Tires)	46,378 lb. (21 037 kg)	46,979 lb. (21 309 kg)	47,924 lb. (21 738 kg)
Cab Height	153.5 in. (3 899 mm)	153.7 in. (3 904 mm)	
<b>TECHNOLOGY</b>			
Advanced Technology Package With 2 Way File Transfer Combine Automation	Harvest Command		

SAFETY NEVER HURTS!™ Always read the Operators Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs, and use any safety features provided. CNH Industrial America LLC reserves the right to make improvements in design and changes in specifications at any time without notice and without incurring any obligation to install them on units previously sold. Specifications, descriptions and illustrative material herein are as accurate as known at time of publication, but are subject to change without notice. Availability of some models and equipment builds varies according to the country in which the equipment is used.

