

ENGINE

Model	Kubota D1703-M
Emissions Certification	Tier 4 Final / Stage V
Net horsepower - SAE J1349 @ 2300 RPM:	24.4 hp (18.2 kW)
Displacement	1.6 L
Cylinders	3-cylinder in line
Cooling	Liquid

DRIVETRAIN

Travel speeds – 2-speed travel w/ auto-shift:	
1st	1.7 mph (2.7 km/h)
2nd	2.7 mph (4.3 km/h)
Number of lower rollers	4

ELECTRICAL

Voltage	12 volts
Alternator rating	40 amp
Battery	12 volts
Battery reserve capacity	80 Ah
Work lights	1 x boom / 1x roof

OPERATOR ENVIRONMENT

Boom, arm, bucket and swing	2 x pilot joysticks
Tracks	2 x pilot levers
Dozer blade	1 x pilot lever
AUX 1	1- or 2-way flow
Electric proportional switch on right joystick	
AUX 2	2-way flow
Electric proportional switch on right joystick	
Boom swing	Electric proportional switch on left joystick
AUX 2/boom swing switch selection on right joystick	
Operating Weight	
Canopy operating weight with rubber tracks:	8,333 lb (3780 kg)
Cab operating weight with rubber tracks:	8,620 lb (3910 kg)
*Operating weight includes 165 lb bucket and 165 lb operator	


HYDRAULICS

Type	Open Center
Pump type	1 x LS variable pump
Max. rated flow total	26.7 gpm (101 L/min)
Max. system pressure	3,771 psi (260 bar)
AUX 1 rated flow @ max. system pressure	10.6 gpm (40 L/min)
AUX 2 rated flow @ max. system pressure	8.5 - 5.3 gpm (32 - 20 L/min)
Slew speed	10.5 rpm
2nd Auxiliary (AUX 2) circuit with Electro-Hydraulic proportional control	

SERVICE CAPACITIES

Fuel tank	12.9 gal (49 L)
Hydraulic oil tank	8.8 gal (33.5 L)
Hydraulic circuit capacity	14.3 gal (54 L)
Cooling system capacity	2.1 gal (8 L)
Engine oil	1.7 gal (6.3 L)



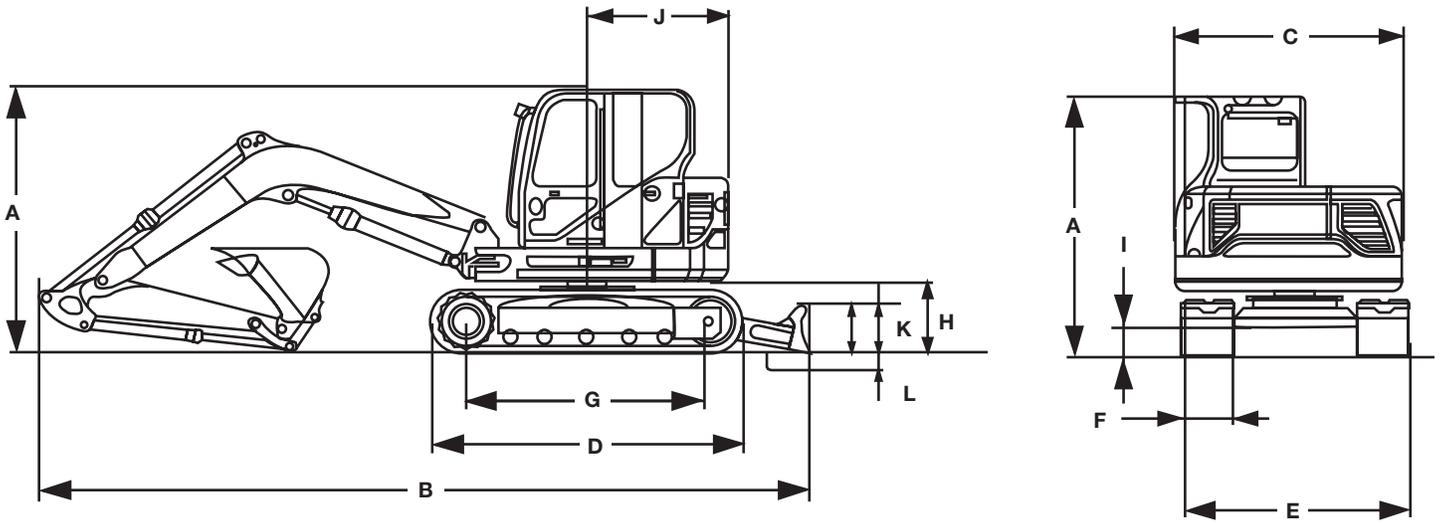

Line drawings are for illustrative purpose only and may not be exact representation of unit.


DIMENSIONS

4 ft 7 in (1.40 m) Arm

A. Overall height	8 ft 3 in (2520 mm)
B. Overall transport length	16 ft 1 in (4900 mm)
C. Width of upper structure	5 ft 5 in (1640 mm)
D. Track overall length	7 ft 1 in (2155 mm)
E. Track overall width	5 ft 6 in (1700 mm)
F. Track shoe width	11.8 in (300 mm)
G. Center to center – idler to sprocket	5 ft 7 in (1700 mm)
H. Upper structure ground clearance	1 ft 10 in (550 mm)
I. Minimum ground clearance	11.2 in (286 mm)
J. Tail swing radius:	
Standard counterweight	2 ft 9 in (850 mm)
Additional counterweight	3 ft 2 in (966 mm)
Additional counterweight – heavy	3 ft 4 in (1020 mm)
Boom swing	67° left / 60° right
Tail swing overhang:	
Standard counterweight	0 in (0 mm)
Additional counterweight	4.6 in (116 mm)
Additional counterweight – heavy	6.7 in (170 mm)

BLADE SPECS

K. Backfill blade rise above ground	1 ft 2 in (352 mm)
L. Backfill blade dig depth	1 ft 1 in (321 mm)
Backfill blade width	5 ft 7 in (1700 mm)

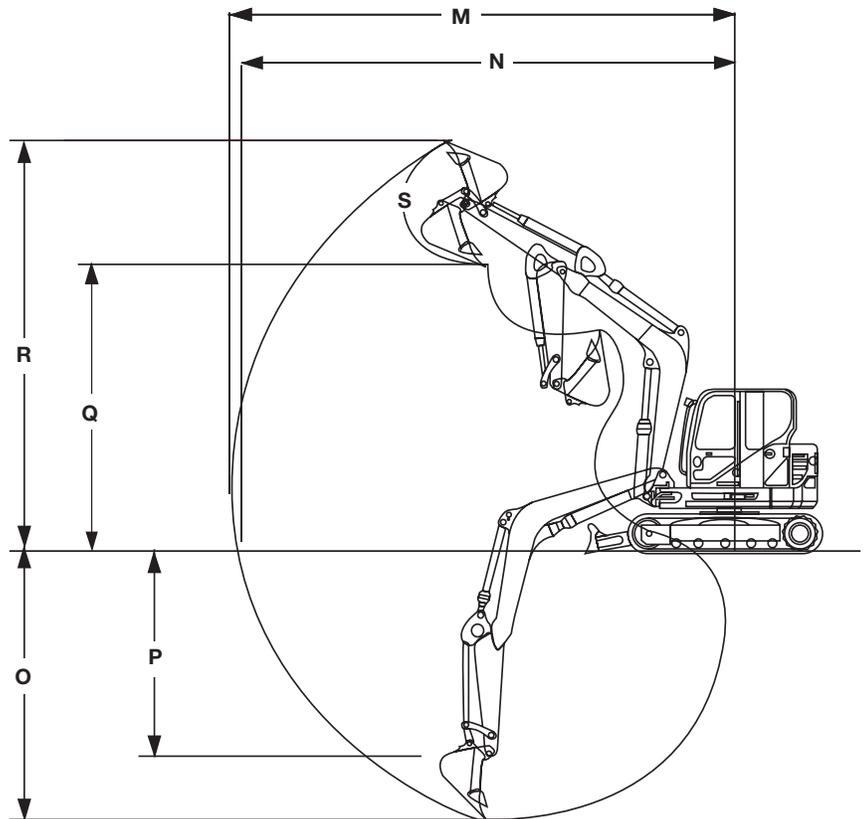

PERFORMANCE SPECS

4 ft 7 in (1.40 m) Arm

5 ft 5 in (1.65 m) Arm

M. Maximum dig radius	16 ft 10 in (5120 mm)	17 ft 7 in (5360 mm)
N. Dig radius at groundline	16 ft 5 in (5000 mm)	17 ft 3 in (5250 mm)
O. Maximum dig depth	10 ft 1 in (3070 mm)	10 ft 11 in (3320 mm)
P. Vertical straight wall dig depth	8 ft 2 in (2480 mm)	8 ft 11 in (2730 mm)
Q. Dump height	10 ft 7 in (3230 mm)	11 ft 1 in (3380 mm)
R. Overall reach height	14 ft 11 in (4550 mm)	15 ft 5 in (4690 mm)
S. Bucket rotation	197°	197°
Arm digging force – ISO	3,552 lbf (15.8 kN)	3,158 lbf (14 kN)
Bucket digging force – ISO	6,800 lbf (30.2 kN)	6,800 lbf (30.2 kN)

LIFT CAPACITIES

4 ft 7 in (1.40 m) Arm, Dozer Blade Down

Load (Lift Point) Height	7 ft (2 m)		8 ft (2.5 m)		10 ft (3 m)		12 ft (3.5 m)		13 ft (4 m)		MAXIMUM REACH		
	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	@	END	SIDE
+10 ft (3 m)							1,604 lb* (728 kg)*	1,604 lb* (728 kg)*			12 ft 5 in 3.78 m	1,735 lb* (787 kg)*	1,547 lb (702 kg)
+8 ft (2.5 m)							1,627 lb* (738 kg)*	1,627 lb* (738 kg)*	1,732 lb* (786 kg)*	1,416 lb (642 kg)	13 ft 4 in 4.06 m	1,759 lb* (798 kg)*	1,380 lb (626 kg)
+7 ft (2 m)					1,823 lb* (827 kg)*	1,823 lb* (827 kg)*	1,767 lb* (801 kg)*	1,724 lb (782 kg)	1,758 lb* (797 kg)*	1,409 lb (639 kg)	13 ft 11 in 4.25 m	1,792 lb* (813 kg)*	1,282 lb (582 kg)
+5 ft (1.5 m)			2,614 lb* (1 186 kg)*	2,614 lb* (1 186 kg)*	2,195 lb* (996 kg)*	2,127 lb (965 kg)	1,975 lb* (896 kg)*	1,695 lb (769 kg)	1,859 lb* (843 kg)*	1,394 lb (632 kg)	14 ft 4 in 4.36 m	1,834 lb* (832 kg)*	1,225 lb (556 kg)
+3 ft (1 m)			3,341 lb* (1 515 kg)*	2,712 lb (1 230 kg)	2,592 lb* (1 176 kg)*	2,076 lb (942 kg)	2,206 lb* (1 001 kg)*	1,665 lb (755 kg)	1,985 lb* (900 kg)*	1,376 lb (624 kg)	14 ft 5 in 4.40 m	1,883 lb* (854 kg)*	1,201 lb (545 kg)
+2 ft (0.5 m)			3,886 lb (1 763 kg)	2,646 lb (1 200 kg)	2,930 lb* (1 329 kg)*	2,034 lb (923 kg)	2,413 lb* (1 095 kg)*	1,638 lb (743 kg)	2,101 lb* (953 kg)*	1,360 lb (617 kg)	14 ft 4 in 4.36 m	1,938 lb* (879 kg)*	1,206 lb (547 kg)
Groundline	6,077 lb* (2 756 kg)*	3,703 lb (1 680 kg)	4,166 lb (1 890 kg)*	2,610 lb (1 184 kg)	3,149 lb* (1 428 kg)*	2,006 lb (910 kg)	2,556 lb* (1 159 kg)*	1,619 lb (734 kg)	2,170 lb* (984 kg)*	1,349 lb (612 kg)	14 ft 0 in 4.26 m	2,000 lb* (907 kg)*	1,242 lb (563 kg)
-2 ft (-0.5 m)	5,942 lb* (2 695 kg)*	3,701 lb (1 679 kg)	4,215 lb* (1 912 kg)*	2,597 lb (1 178 kg)	3,223 lb* (1 462 kg)*	1,992 lb* (904 kg)	2,599 lb* (1 179 kg)*	1,609 lb (730 kg)	2,138 lb* (970 kg)*	1,347 lb (611 kg)	13 ft 4 in 4.07 m	2,067 lb* (938 kg)*	1,317 lb (597 kg)
-3 ft (-1.0 m)	5,580 lb* (2 531 kg)*	3,715 lb (1 685 kg)	4,054 lb* (1 839 kg)*	2,601 lb (1 180 kg)	3,131 lb* (1 420 kg)*	1,993 lb (904 kg)	2,489 lb* (1 129 kg)*	1,612 lb (731 kg)			12 ft 5 in 3.79 m	2,136 lb* (969 kg)*	1,454 lb (660 kg)
-5 ft (-1.5 m)	4,941 lb* (2 241 kg)*	3,746 lb (1 699 kg)	3,648 lb* (1 655 kg)*	2,621 lb (1 189 kg)	2,796 lb* (1 268 kg)*	2,010 lb (912 kg)					11 ft 1 in 3.39 m	2,201 lb* (998 kg)*	1,708 lb (775 kg)
-7 ft (-2 m)	3,824 lb* (1 735 kg)*	3,804 lb (1 725 kg)	2,778 lb* (1 260 kg)*	2,668 lb (1 210 kg)							9 ft 1 in 2.78 m	2,227 lb* (1 010 kg)*	2,227 lb* (1 010 kg)*

*Indicates load limited by hydraulic capacity

5 ft 5 in (1.65 m) Arm, Dozer Blade Down

Load (Lift Point) Height	7 ft (2 m)		8 ft (2.5 m)		10 ft (3 m)		12 ft (3.5 m)		13 ft (4 m)		15 ft (4.5 m)		MAXIMUM REACH		
	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	@	END	SIDE
+10 ft (3 m)							1,344 lb* (610 kg)*	1,344 lb* (610 kg)*	1,540 lb* (699 kg)*	1,420 lb (644 kg)			13 ft 4 in 4.06 m	1,577 lb* (715 kg)*	1,382 lb (627 kg)
+8 ft (2.5 m)							1,401 lb* (635 kg)*	1,401 lb* (635 kg)*	1,505 lb* (683 kg)*	1,420 lb (644 kg)			14 ft 2 in 4.32 m	1,604 lb* (728 kg)*	1,251 lb (567 kg)
+7 ft (2 m)					1,543 lb* (700 kg)*	1,543 lb* (700 kg)*	1,558 lb* (707 kg)*	1,558 lb* (707 kg)*	1,576 lb* (715 kg)*	1,408 lb (639 kg)	1,639 lb* (743 kg)*	1,170 lb (531 kg)	14 ft 9 in 4.50 m	1,639 lb* (743 kg)*	1,170 lb (531 kg)
+5 ft (1.5 m)			2,182 lb* (990 kg)*	2,182 lb* (990 kg)*	1,925 lb* (873 kg)*	1,925 lb* (873 kg)*	1,782 lb* (808 kg)*	1,695 lb (769 kg)	1,701 lb* (772 kg)*	1,390 lb (630 kg)	1,674 lb* (759 kg)*	1,163 lb (528 kg)	15 ft 1 in 4.60 m	1,681 lb* (762 kg)*	1,123 lb (509 kg)
+3 ft (1 m)			2,960 lb* (1 343 kg)*	2,731 lb (1 239 kg)	2,355 lb* (1 068 kg)*	2,080 lb (943 kg)	2,036 lb* (924 kg)*	1,662 lb (754 kg)	1,852 lb* (840 kg)*	1,369 lb (621 kg)	1,745 lb* (792 kg)*	1,152 lb (523 kg)	15 ft 3 in 4.64 m	1,728 lb* (784 kg)*	1,102 lb (500 kg)
+2 ft (0.5 m)	5,508 lb* (2 498 kg)*	3,742 lb (1 697 kg)	3,612 lb* (1 638 kg)*	2,650 lb (1 202 kg)	2,745 lb* (1 245 kg)*	2,031 lb (921 kg)	2,278 lb* (1 033 kg)*	1,630 lb (740 kg)	1,997 lb* (906 kg)*	1,349 lb (612 kg)	1,813 lb* (822 kg)*	1,141 lb (518 kg)	15 ft 1 in 4.60 m	1,780 lb* (807 kg)*	1,105 lb (501 kg)
Groundline	5,968 lb* (2 707 kg)*	3,685 lb (1 671 kg)	4,017 lb* (1 822 kg)*	2,600 lb (1 179 kg)	3,029 lb* (1 374 kg)*	1,994 lb (904 kg)	2,464 lb* (1 118 kg)**	1,605 lb (728 kg)	2,108 lb* (956 kg)*	1,333 lb (605 kg)	1,839 lb* (834 kg)*	1,133 lb (514 kg)	14 ft 9 in 4.50 m	1,839 lb* (834 kg)*	1,133 lb (514 kg)
-2 ft (-0.5 m)	6,023 lb* (2 732 kg)*	3,667 lb (1 663 kg)	4,183 lb* (1 897 kg)*	*2,575 lb (1 168 kg)*	3,178 lb* (1 442 kg)*	1,973 lb (895 kg)	2,565 lb* (1 163 kg)*	1,590 lb (721 kg)	2,149 lb* (975 kg)*	1,325 lb (601 kg)			14 ft 2 in 4.33 m	1,903 lb* (863 kg)*	1,192 lb (541 kg)
-3 ft (-1.0 m)	5,807 lb* (2 634 kg)*	3,672 lb (1 666 kg)	4,135 lb* (1 876 kg)*	2,570 lb (1 166 kg)	3,173 lb* (1 439 kg)*	1,967 lb (892 kg)	2,545 lb* (1 154 kg)*	1,586 lb (719 kg)	2,055 lb* (932 kg)*	1,328 lb (602 kg)			13 ft 4 in 4.07 m	1,973 lb* (895 kg)*	1,298 lb (589 kg)
-5 ft (-1.5 m)	5,323 lb* (2 414 kg)*	3,696 lb (1 676 kg)	3,866 lb* (1 754 kg)*	2,582 lb (1 171 kg)	2,976 lb* (1 350 kg)*	1,975 lb (896 kg)	2,325 lb* (1 055 kg)*	1,597 lb (724 kg)					12 ft 2 in 3.71 m	2,046 lb* (928 kg)*	1,483 lb (673 kg)
-7 ft (-2 m)	4,472 lb* (2 028 kg)*	3,740 lb (1 696 kg)	3,276 lb* (1 486 kg)*	2,615 lb (1 186 kg)	2,434 lb* (1 104 kg)*	2,006 lb (910 kg)							10 ft 5 in 3.18 m	2,111 lb* (958 kg)*	1,853 lb (841 kg)

*Indicates load limited by hydraulic capacity

STANDARD EQUIPMENT

ENGINE

Kubota D1703-M diesel engine - Tier 4 Final/ Stage V compliant
Dry air filter with drain valve and electric anti-clogging indicator
Glow plugs for cold weather starting
Electric engine RPM and idle control

ELECTRICAL

12-volt electrical system
Heavy-duty battery
Battery disconnect switch
Auxiliary power socket next to operator
Auxiliary power socket on roof for beacon
Key start switch
Radio & Speakers
Horn
Travel alarm
MyCASEConstruction Telematics
Includes hardware and 7-year data subscription.

UPPER STRUCTURE

Zero tail swing (with standard counterweight)
Long arm with thumb bracket
Pin-on bucket
Swing boom
Enclosed cab with ROPS/TOPS/FOPS Level 1
LED work lights
LED beacon
Standard counterweight
Bucket linkage with lifting hook
Tiltable operator station

OPTIONAL EQUIPMENT

ELECTRICAL

Electric refuel pump with auto-stop function

UPPER STRUCTURE

Short arm with thumb bracket
Full range of attachment quick couplers
Full range of buckets
Hydraulic thumb
Bio degradable hydraulic oil and lubricants
Anti-theft system
Additional bolt-on counterweight
Front protection guard (Level 2)
Open canopy with ROPS/TOPS/FOPS Level 1

HYDRAULICS

Variable displacement hydraulic pump
High flow 1-1/2-way auxiliary hydraulics (AUX1)
Low flow 2-way auxiliary hydraulics (AUX2)
Attachment quick coupler auxiliary hydraulics (2-way | double effect)
Direct drain to tank auxiliary circuit
Control pattern selector valve (ISO/SAE)
Cylinder guard on boom and dozer blade cylinders
Mineral based hydraulic oil and lubricants
AUX1 hydraulic flow control
AUX1 1-1/2-way flow manual selection valve

UNDERCARRIAGE & TRACK DRIVE

Rubber belt tracks
2-speed travel with auto shift down/up
Fully hydrostatic drive system
Sealed and lubricated track rollers
Hydraulically adjustable track tensioner (with grease)
Dozer blade with float

OPERATOR ENVIRONMENT

A/C and heating
Adjustable mechanical suspension vinyl seat with seat belt
Travel levers with foldable foot pedals
Pilot controlled joysticks for boom, arm, bucket, and boom swing with electro-hydraulic proportional controls for boom swing, AUX1, AUX2, and AUX3
Blade control lever
Engine throttle lever
Digital cluster with warning light indicators
Visual indicators
Ignition key that opens all machine panel locks
Operator's manual compartment
Automatic courtesy light (in-cab)
Windshield wiper and washer
2-piece overhead stowable windshield
Slide right side window
Adjustable arm rests
Cup holder
Footrests

WARRANTY

Base warranty coverage: 2-Year/ 3,000-Hour Full Machine Limited Warranty

HYDRAULICS

Low flow 2-way auxiliary hydraulics (AUX3)
Object handling kit with hose burst check valves on boom and arm and overload indicator light
Blade safety hose burst check valve
High constant flow 1-way mulching head auxiliary hydraulics
Automatic centralized lubrication
Attachment quick coupler auxiliary hydraulics (1-way | single effect)

UNDERCARRIAGE & TRACK DRIVE

Steel tracks
6-way dozer blade with cutting edge, float and dual side foldable extensions

OPERATOR ENVIRONMENT

Rear view mirrors

CaseCE.com

©2025 CNH Industrial America LLC. All rights reserved. CASE, CNH Industrial Capital and CNH are trademarks registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH Industrial America LLC., are the property of those respective companies.

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.



CASE Construction Equipment is biodiesel-friendly. NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.



Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.

Form No. CCE202512CX38D

Replaces Form No. CCE202506CX38D

CX38D

4 of 4