



ENGINE

| | |
|--|------------------------|
| Model | Yanmar 3TNV76 |
| Emissions Certification | Tier 4 Final / Stage V |
| Net horsepower - SAE J1349 @ 2300 RPM: | 18.4 hp (13.7 kW) |
| Displacement | 1.116 L |
| Cylinders | 3-cylinder in line |
| Cooling | Liquid |

DRIVETRAIN

| | |
|---|-------------------|
| Travel speeds – 2-speed travel w/ auto-shift: | |
| 1st | 1.4 mph (2.3 kph) |
| 2nd | 2.7 mph (4.4 kph) |

ELECTRICAL

| | |
|--------------------------|---------------------|
| Voltage | 12 volts |
| Alternator rating | 40 amp |
| Battery | 1 x 12 volts |
| Battery reserve capacity | 65 Ah |
| Work lights | 1 x boom / 1 x roof |

OPERATOR ENVIRONMENT

| | |
|---|---------------------|
| Boom, arm, bucket and swing | 2 x pilot joysticks |
| Tracks | 2 x pilot levers |
| Dozer blade | 1 x lever |
| Aux 1 | 1 or 2-way flow |
| Electric proportional switch on right joystick | |
| Aux 2 | 2-way flow |
| Electric proportional switch on left joystick | |
| Boom swing | |
| Electric proportional switch on left joystick | |
| Aux 2/boom swing switch selection on right joystick | |

OPERATING WEIGHT

| | |
|---|---------------------|
| Canopy operating weight with rubber tracks: | 4,145 lb (1 880 kg) |
|---|---------------------|


HYDRAULICS

| | |
|--|----------------------|
| Type | Open Center |
| Pump type | 2 x gear pumps |
| Max. rated flow total: | 13 gpm (49.1 L/min) |
| Max. system pressure | 3,481 psi (240 bar) |
| Aux 1 rated flow @ 205 bar | 8.2 gpm (31.1 L/min) |
| Aux 2 rated flow @ 205 bar | 3.5 gpm (13.1 L/min) |
| Slew speed | 9.5 RPM |
| 2nd Auxiliary (Aux 2) circuit with | |
| Electro-Hydraulic proportional control | |

SERVICE CAPACITIES

| | |
|----------------------------|------------------|
| Fuel tank | 7 gal (25 L) |
| Hydraulic oil tank | 5 gal (20 L) |
| Hydraulic circuit capacity | 8 gal (29 L) |
| Cooling system capacity | 1.2 gal (4.5 L) |
| Engine oil | 0.74 gal (2.8 L) |



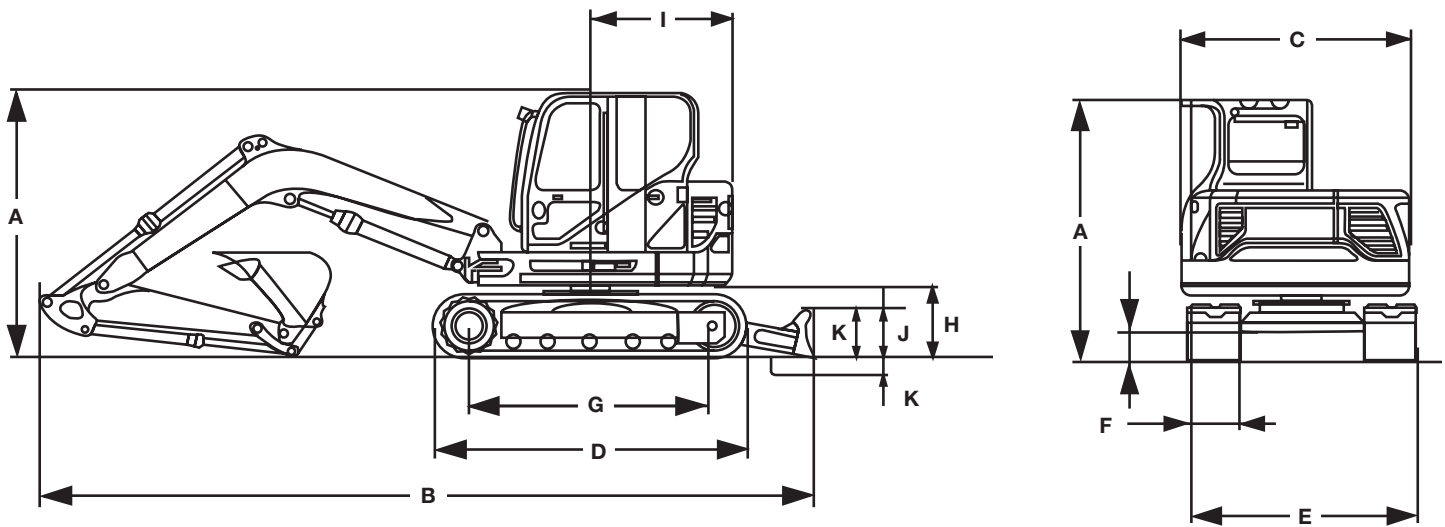


Line drawings are for illustrative purpose only
and may not be exact representation of unit.

DIMENSIONS

3 ft 9 in (1.15 m) Arm

| | |
|---|-----------------------|
| A. Overall height | 7 ft 9 in (2 370 mm) |
| B. Overall transport length | 12 ft 8 in (3 860 mm) |
| C. Width of upper structure | 4 ft 3 in (1 300 mm) |
| D. Track overall length | 5 ft 1 in (1 560 mm) |
| E. Track overall width | 3 ft 3 in (990 mm) |
| F. Track shoe width | 9 in (230 mm) |
| G. Center to center - idler to sprocket | 3 ft 11 in (1 185 mm) |
| H. Upper structure ground clearance | 1 ft 6 in (456 mm) |
| I. Tail swing radius: | |
| Standard counterweight | 2 ft 2 in (650 mm) |
| Boom swing | 67° left/60° right |
| Tail swing overhang: | |
| Standard counterweight | 0 in (0 mm) |

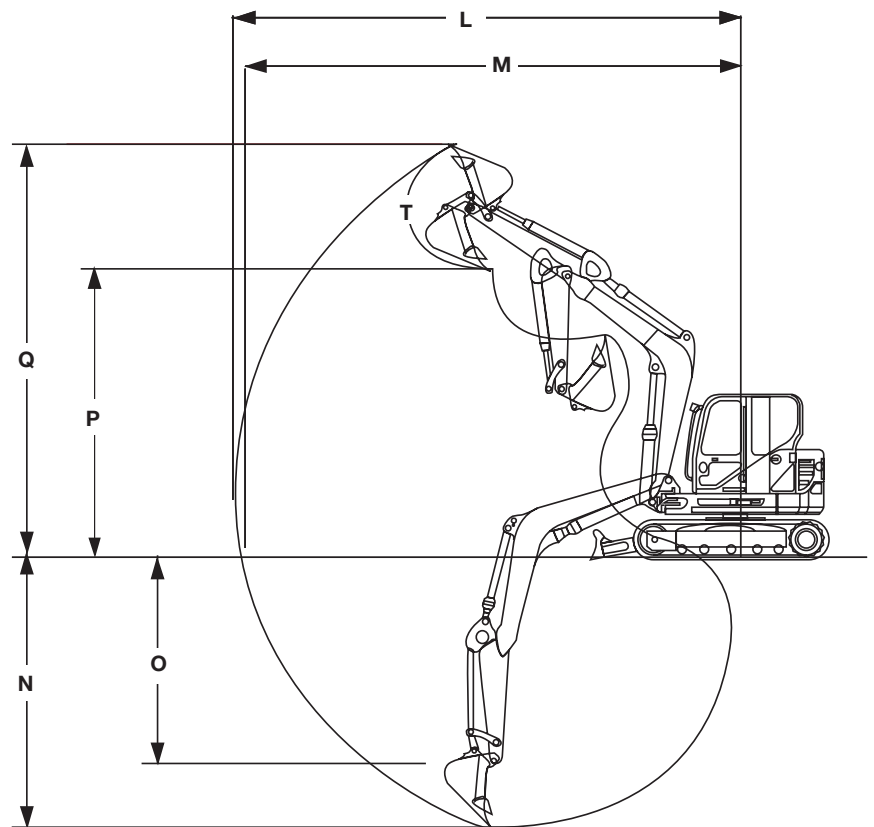

BLADE SPECS

| | |
|-------------------------------------|--------------------|
| J. Backfill blade rise above ground | 11 in (290 mm) |
| K. Backfill blade dig depth | 10 in (260 mm) |
| Backfill blade width | 3 ft 3 in (990 mm) |

PERFORMANCE SPECS

| | 3 ft 9 in (1.15 m) | 4 ft 5 in (1.35 m) |
|-------------------------------------|------------------------|------------------------|
| L. Maximum dig radius | 13 ft 2 in (4 020 mm) | 13 ft 10 in (4 210 mm) |
| M. Dig radius at groundline | 12 ft 10 in (3 920 mm) | 13 ft 6 in (4 120 mm) |
| N. Maximum dig depth | 7 ft 6 in (2 280 mm) | 8 ft 2 in (2 480 mm) |
| O. Vertical straight wall dig depth | 5 ft 10 in (1 770 mm) | 6 ft 5 in (1 960 mm) |
| P. Dump height | 8 ft 6 in (2 580 mm) | 8 ft 10 in (2 700 mm) |
| Q. Overall reach height | 11 ft 9 in (3 590 mm) | 12 ft 2 in (3 710 mm) |
| Arm digging force - ISO | 2,136 lbf (9.5 kN) | 2,136 lbf (9.5 kN) |
| Bucket digging force - ISO | 3,372 lbf (15 kN) | 3,372 lbf (15 kN) |


Opening arm from the rotation's center ft-in (mm)
Lifting capacity in lb (kg) at 3-4 (1,000) height

| LIFTING CAPACITY | 6 FT 7 IN (2 000 MM) | MAX |
|---------------------------------|----------------------|-----------------|
| Frontal and lowered dozer blade | 1,345 lb (610 kg) | 860 lb (390 kg) |
| Frontal and lifted dozer blade | 948 lb (430 kg) | 397 lb (180 kg) |
| Lateral, open undercarriage | 948 lb (430 kg) | 419 lb (190 kg) |

* Indicates the hydraulic load limit.

The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.

Standard arm L = 3-9 (1,150)
Long arm L = 4-5 (1,350)

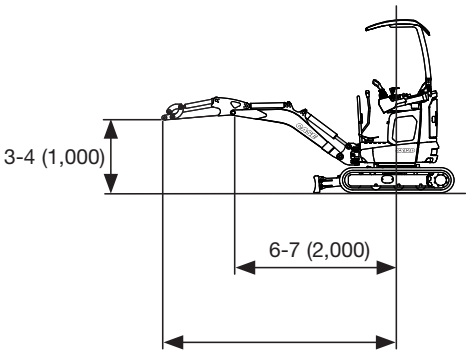

STANDARD EQUIPMENT

ENGINE

- Yanmar 3TNV76 diesel engine - Tier 4 Final/ Stage V compliant
- Dry air filter with clogged filter warning on instrument cluster
- Glow plugs for cold weather starting

ELECTRICAL

- 12-volt electrical system
- Heavy-duty battery
- Battery disconnect switch
- Auxiliary power socket next to operator
- Auxiliary power socket on roof for beacon
- Key start switch
- Horn
- Travel alarm
- CASE SiteWatch™ Telematics

UPPER STRUCTURE

- Zero tail swing (with standard counterweight)
- Long arm
- Pin-on bucket
- Swing boom
- Open canopy with ROPS/TOPS/FOPS Level 1
- LED work lights
- LED beacon
- Standard counterweight
- Bucket linkage with lifting hooks

HYDRAULICS

- High flow 1-/2-way auxiliary hydraulics (Aux 1)
- Low flow 2-way auxiliary hydraulics (Aux 2)
- Attachment quick coupler auxiliary hydraulics (2-way I double effect)
- Direct drain to tank auxiliary circuit
- Control pattern selector valve (ISO/SAE)
- Cylinder guard on boom and dozer blade cylinders
- Hydraulic variable flow rate pump
- Mineral based hydraulic oil and lubricants

TRACK DRIVE

- Rubber belt tracks
- Retractable tracks/undercarriage
- 2-speed travel with auto shift down/up
- Fully hydrostatic drive system
- Sealed and lubricated track rollers
- Hydraulically adjustable track tensioner (with grease)
- Dozer blade with float and dual side foldable extensions

OPERATOR ENVIRONMENT

- Adjustable mechanical suspension vinyl seat with seat belt
- Travel levers with foldable foot pedals
- Pilot controlled joysticks
- Blade control lever
- Engine throttle lever
- Warning light indicators
- Visual indicators
- Ignition key that opens all machine panel locks
- Operator's manual compartment
- Footrests

OPTIONAL EQUIPMENT

HYDRAULICS

Object handling kit with hose burst check valves on boom and arm
Blade safety hose burst check valve
High constant flow 1-way mulching head auxiliary hydraulics
Attachment quick coupler auxiliary hydraulics (1-way I single effect)

UPPER STRUCTURE

Short arm
Full range of attachment quick couplers
Full range of buckets
Hydraulic thumb
Biodegradable hydraulic oil and lubricants
Anti-theft system
Additional bolt-on counterweight
Front protection guard (Level 2)

OPERATOR ENVIRONMENT

Adjustable mechanical suspension fabric seat with seat belt
Cab heater
Rear view mirrors
Windshield wiper and washer
Automatic courtesy light
2-piece overhead stowable windshield
Slide right side window
Radio & Speakers
Enclosed cab with ROPS/TOPS/FOPS Level 1

CaseCE.com

©2025 CNH Industrial America LLC. All rights reserved. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Capital is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates.

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.



CASE Construction Equipment is biodiesel-friendly. NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.



Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.

Form No. CCE202503CX19D
Replaces Form No. CCE202502CX19D

CX19D

4 of 4