

DOZER

XLT/WT/LGP



1150M

MOTOR

Model	FPT F4HFE613F*A002
Emissions Certification	Tier 4 Final Certified
Cylinders	6
Displacement	409 in ³ (6.7 L)
Fuel injection	Common rail
Fuel	#2 Diesel
Fuel filter	Spin-on w/ in-line strainer
Air intake	Cross-flow
Cooling	Liquid
Engine speeds	RPM
High idle - no load	2200 +/- 50
Rated - full load	2200
Low idle	1100 +/- 25
Horsepower @ 2000 RPM – SAE J1349:	
Net	127.4 hp (95 kW)
Gross	138 hp (103 kW)
Engine lubrication:	
Pump	Deep sump plate cooler w/ pressurized under-piston nozzles
Pump operating angle ratings:	
Side-to-side	35°
Fore and aft	45°
Oil filtration	Replaceable, spin-on full-flow cartridge
Radiator:	
Fins per inch	10.16
Fan:	
Diameter	26.0 in (660 mm)
Ratio	0.96:1

DRIVETRAIN

Dual path hydrostatic:	
Pump	Variable axial piston
Motor	Variable bent axis piston
Max. drawbar pull*	48,000 lb (213.5 kN)
Transmission	Single lever control – electronic straight tracking
Transmission oil filter	4 micron, spin-on replaceable w/ 100 mesh suction screen
Travel speeds*:	
Forward	5.8 mph (9.3 kph)
Reverse	5.8 mph (9.3 kph)
Parking brakes	Heavy-duty, spring-applied, hydraulic pressure release
Steering brakes	Hydrostatic
Final drive	2 helical gear reduction to planetary output
Ratio	61.4:1
Transmission cooling:	
Type	Oil to air
Core size	498 in ² (0.32 m ²)

NOTE: *Measured using standard track chain.

Increase travel speeds by 4% and reduce drawbar pull by 4% with the optional Max Life track chain.

ELECTRICAL

Alternator	120 amp
Battery	(2) 12-volt, low-maintenance 925 cold-cranking amps @ -4° F (-20° C)
Electrical System	24 Volts

OPERATOR ENVIRONMENT

ROPS cab; Single lever control for speed, steering and direction; Cloth air suspension seat w/ back adjustment; Retractable 3 in (76 mm) seat belt; Adjustable armrest; Two foot rest; Rearview mirror; Two door windshield wipers; Dome light; 12-volt accessory outlet; Headliner; Floor mat; Rear Wiper; Radio; Heat/AC.
Warning lights:
Air filter; Alternator; Diagnostic fault indicator; Engine coolant temperature; Engine oil pressure; Hydraulic filter; Low fuel level; DEF fluid level; Park brake engaged; Service soon indicator; Transmission filter; Transmission charge pressure.
Gauges:
Battery voltage; Fuel level; Digital hour meter/ tachometer/diagnostic/service reminder; Transmission oil temperature; Transmission speed indicator; Water temperature: Diesel Exhaust Fluid (DEF) level.

Audible warnings:

Engine coolant temperature; Engine oil pressure; Low fuel level; Transmission charge pressure; Temperature/hydraulic temperature.

OPERATING WEIGHT

Unit equipped w/ ROPS, full fuel tank, 170 lb (77 kg) operator, side shield, track guides, backup alarm, horn, lights and rear retrieval hitch.

Long track	31,134 lb (14 122 kg)
Wide track	32,174 lb (14 594 kg)
LGP	32,637 lb (14 804 kg)

Add-on weights:

Drawbar	146 lb (66 kg)
Ripper 3 Shank	2,377 lb (1 078 kg)
Winch	2,448 lb (1 110 kg)
Front Counterweight	948 lb (430 kg)
Cab	560 lb (254 kg)
MAX LIFE chain:	
20 in (508 mm)	148 lb (67 kg)
22 in (559 mm)	158 lb (71 kg)
26 in (660 mm)	153 lb (69 kg)
30 in (762 mm)	150 lb (68 kg)
Center rock guard	295 lb (134 kg)
Sweeps	139 lb (63 kg)

HYDRAULICS

Pump flow @ 2200 RPM @ 2,830 psi (19 512 kPA)	34.9 gpm (132 L/min)
---	----------------------

Lift cylinder Two (2)

Bore diameter	4.25 in (108.0 mm)
Rod diameter	2.00 in (50.8 mm)
Stroke	19.21 in (488.0 mm)

Angle cylinder	Two (2)
Bore diameter	4.50 in (114.3 mm)
Rod diameter	2.50 in (63.5 mm)
Stroke	18.33 in (465.7 mm)

Tilt cylinder	One (1)
Bore diameter	5.00 in (127.0 mm)
Rod diameter	2.50 in (63.5 mm)
Stroke	5.84 in (148.3 mm)

SERVICE CAPACITIES

Fuel tank	85.0 gal (322.0 L)
Engine oil w/ filter	17.3 qt (16.4 L)
Engine oil w/o filter	16.5 qt (15.6 L)
Engine cooling system	7.4 gal (28 L)
Hydraulic reservoir	51.0 gal (193 L)
Final drive – per side	16.5 qt (15.9 L)
Track rollers – each	0.26 qt (0.25 L)
Front idlers – each	0.35 qt (0.33 L)
Carrier rollers – each	0.26 qt (0.25 L)
DEF tank 14.0 gal	(52.0 L)

OTHER SPECIFICATIONS

Undercarriage:	
Track adjustment	Hydraulic
Frame	Pivot shaft and oscillating equalizer beam suspension
Length of track on the ground:	
SALT HD	102.4 in (2 600 mm)
MAX LIFE	101.0 in (2 566 mm)
Track link pitch	6.9 in (175 mm)
Track shoe height	2.17 in (55 mm)
Pin diameter	1.44 in (36.58 mm)
Bushing diameter:	
SALT HD	2.45 in (62.6 mm)
MAX LIFE	3.11 in (79 mm)
Track shoes per side	43
Track rollers per side	7
Carrier rollers per side	2
Track roller rail diameter	7.99 in (203 mm)

Track on ground:**Shoe area:**

22 in (559 mm)	4,506 in ² (29 070 cm ²)
26 in (660 mm)	5,320 in ² (34 323 cm ²)
30 in (762 mm)	6,142 in ² (39 627 cm ²)

Track:**Long track:**

22 in (559 mm) closed grousers and SALT HD
22 in (559 mm) open grousers and MAX LIFE

Wide track:

22 in (559 mm) closed grousers and SALT HD
22 in (559 mm) open grousers and MAX LIFE
26 in (660 mm) closed grousers and SALT HD
26 in (660 mm) open grousers and MAX LIFE
30 in (762 mm) closed grousers and SALT HD
30 in (762 mm) open grousers and MAX LIFE

Low ground pressure:

30 in (762 mm) closed grousers and SALT HD
30 in (762 mm) open grousers and MAX LIFE

Blade:

Variable blade pitch	55° – 60°
Lift speed – per second	17 in (503 mm)
Cutting edge	Reversible, replaceable
Width	8.0 in (203.2 mm)
Thickness	0.8 in (19.1 mm)

Ripper:



Max. penetration	20 in (499 mm)
Width	67.4 in (1 711 mm)
Cut width	64.4 in (1 635 mm)
Max. ground clearance	13 in (330 mm)
Max. number of shanks	3

Tooth spacing:

w/ 3 teeth	30.9 in (785 mm)
------------	------------------

Hydraulic cylinder

Diameter	4.0 in (102 mm)
Stroke	10.0 in (254 mm)
Rod	2.0 in (51 mm)

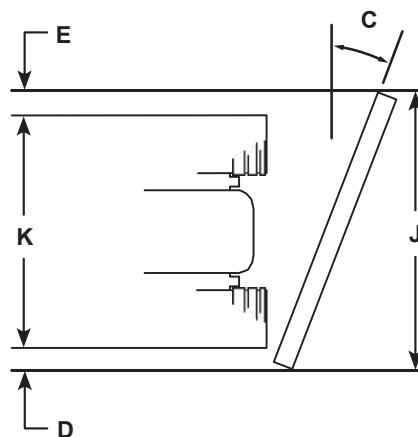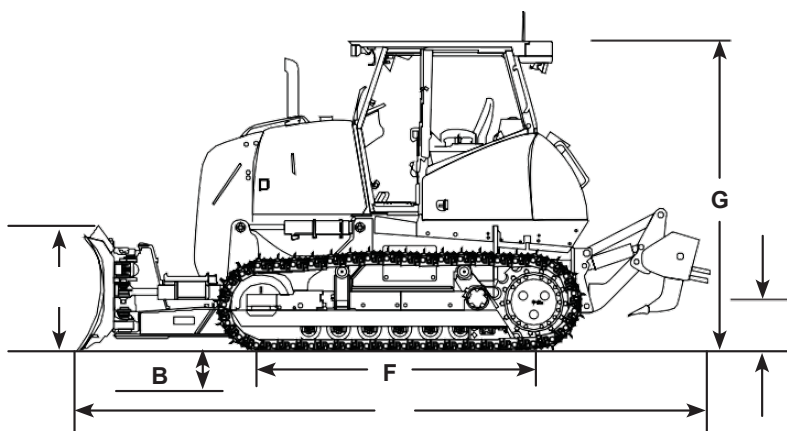

Los dibujos lineales son solo para fines ilustrativos y pueden no ser una representación exacta de la unidad.

DIMENSIONS

	Long Track (LT)	Wide Track (WT)	Low Ground Pressure (LGP)
Blade width	120 in (3 048 mm)	132 in (3 353 mm)	132 in (3 353 mm)
SAE blade capacity	3,77 yd ³ (2,88 m ³)	4,16 yd ³ (3,18 m ³)	4,16 yd ³ (3,18 m ³)
Blade height	44,1 in (1 119 mm)	44,1 in (1 119 mm)	44,1 pulg (1 119 mm)
A. Blade lift above ground	36,4 in (926 mm)	36,4 in (926 mm)	36,4 in (926 mm)
B. Blade depth below ground	20,4 in (518 mm)	20,4 in (518 mm)	20,4 in (518 mm)
C. Blade angle both directions	25°	25°	25°
D. Cast reach	16 in (406 mm)	14,5 in (368 mm)	12,5 in (317 mm)
E. Cut reach	0,8 in (20 mm)	-0,8 mm (-20 mm)	-2,8 in (-71 mm)
Blade tilt, each end – up to 8.3°	16,9 in (430 mm)	17,7 in / 450 mm	17,7 in / 450 mm
Track gauge	72 in (1,83 m)	80 in (2,03 m)	80 in (2,03 m)
Maximum shoe width	20 in (508 mm)	26 in (660 mm)	30 in (762 mm)
F. Length of track on ground	101 in (2 566 mm)	102,4 in (2 600 mm)	102,4 in (2 600 mm)
Area of track on ground	4.095 in (2,64 m ²)	5.320 in ² (3,43 m ²)	6.142 in ² (3,96 m ²)
Ground pressure	7,60 psi (0,53 bar)	6,05 psi (0,42 bar)	5,31 psi (0,37 bar)
G. Height to top of ROPS	9 ft 8 in (2 956 mm)	9 ft 8 in (2 956 mm)	9 ft 8 in (2 956 mm)
Height to top of cab	9 ft 8 in (2 956 mm)	9 ft 8 in (2 956 mm)	9 ft 8 in (2 956 mm)
H. Ground clearance	12,7 in (322 mm)	12,7 in (322 mm)	12,7 in (322 mm)
Length:			
Blade straight with drawbar	16 ft 8 in (5 088 mm)	16 ft 8 in (5 088 mm)	16 ft 8 in (5 088 mm)
I. Blade straight with ripper	20 ft 4 in (6 191 mm)	20 ft 4 in (6 191 mm)	20 ft 4 in (6 191 mm)
Width:			
Blade straight	10 ft 0 in (3 048 mm)	11 ft 0 in (3 353 mm)	11 ft 0 in (3 353 mm)
J. Blade angled	9 ft 1 in (2 773 mm)	9 ft 11 in (3 041 mm)	9 ft 11 in (3 041 mm)
K. Over track	7 ft 9 in (2 388 mm)	8 ft 9 in (2 692 mm)	9 ft 2 in (2 794 mm)

NOTA: Ground clearance and overall height dimensions are with the grousers fully penetrated. Add 2.07 in (55.5 mm) if unit is on solid surface.

STANDARD EQUIPMENT

OPERATOR ENVIRONMENT

SEE PAGE 1

MOTOR

F4HFE613F*A002

Tier 4 Final Certified

SCR

Automatic fan belt tensioner

Integral engine oil cooling

Fuel filter

Dual element radial seal air cleaner

120 amp alternator

(2) 950 CCA 12-volt batteries

Anti-sandblast radiator

Coolant Heated DEF Lines

Pusher Fan

Hinged engine side panels

DRIVETRAIN

Dual path infinitely variable, single-lever

controlled hydrostatic drive, with electronic

straight tracking and counter-rotation

Final drive: Triple reduction; helical gear/planetary

decelerator with hydrostatic drive retardation

Spring-applied hydraulic release parking brake

BLADE

55° – 60° variable pitch, with integral adjustment

tool

Single lever control for blade lift, angle and tilt

UNDERCARRIAGE

Hydraulic track adjusters

Sealed and Lubricated Track Chain (SALT)

Permanently lubricated track and carrier rollers

Track adjuster guard

Track guides – front and rear

Robust smooth one piece track frames with easy
clean-out

Robust rock guards

Enhanced track recoil system

Central grease point for pivot shaft and equalizer
beam

Low noise system configuration

Low vibration system configuration

OTHER

Backup alarm

Horn

Work lights:

2 front

1 rear

Master disconnect switch

Mirror

Turbine Pre-cleaner

Front pull hook

Rear tow hook

Environmental Drain

Grid Heater/Cold Start

Transport Protection

Anti-vandalism package

Rear transmission guard

TELEMATICS

CASE SiteWatch™ Telematics – includes
hardware and a 3-yr Advanced
data subscription

PROCARE

CASE ProCare – Full Machine Protection Factory
Warranty (3-yr/3000-hr), Planned Maintenance
(3-yr/2000-hr) and SiteWatch telematics

OPTIONAL EQUIPMENT

OPERATOR ENVIRONMENT

Cab air quality system

HYDRAULICS

4-spool hydraulic valve for field-installed ripper

REAR MOUNTED EQUIPMENT

Ripper – 5 position with 3 shanks

Hydraulic pump with PTO

Drawbar

Drawbar with step

BLADES

120 in (3 050 mm)

132 in (3 355 mm)

GUARDS

Sweeps

Center rock guard

SCREENS

ROPS rear screen

Cab rear screen

ROPS side screen

Radiator brush screen

Sandblast Screen

OTHER

CASE Extended Life Track

Additional work lights

Front counterweight with pull hook

Severe Cold Weather Package

PRECISION

Factory Fit CoPilot

Factory Fit 2D Laser

Factory Fit 3D GNSS

Universal Blade Guidance:

Compatible with Leica, Trimble and Topcon

Leica Blade Guidance Ready

Trimble Blade Guidance Ready

Topcon Blade Guidance Ready



Fleet management and monitoring system by satellite or cell phone tracking.

CASE Corporation reserves the right to make design improvements or feature changes at any time without obligation to install them on previously sold units. Features, descriptions, and illustrative materials included in this document, accurately reflect known data until the date of publication, although they are subject to changes without notice. Illustrations may include optional equipment and accessories and may not include all standard equipment.

CCEIO170 - 04/2024 – Printed in Brazil

CaseCE.com.br

Escritório Comercial
Garin – Buenos Aires
Rep. Argentina
Calle 28, 920
Panamericana km 38,5
Tel.: +54 3327-4461000

Manufacturing plants
Contagem – Minas Gerais – Brasil
Av. General David Sarnoff, 2.237
Inconfidentes – CEP 32210-900
Tel.: +55 31 2104-3392

Sorocaba – São Paulo – Brasil
Av. Jerome Case, 1.801
Éden – CEP 18087-220
Tel.: +55 15 3334-1700

CNH | CAPITAL