



# SV-SERIES STAGE V BACKHOE LOADERS



580SV | 590SV | 695SV

# ACROSS HISTORY



**1842**

CASE is founded.

**1869**

The first CASE portable steam engine - road construction is born!

**1957**

CASE produces the first ever factory integrated backhoe loader.

**1959**

CASE TLB 420 is the first diesel powered model.

**1964**

CASE is the first manufacturer to develop an extendable dipper, the patented CASE Extendahoe.

**1999**

CASE is the first company to offer a powershift transmission on a backhoe loader.

**2000**

CASE is the first company to offer a backhoe integrated quick coupler.

**2001**

CASE M series backhoe is listed in "Construction Equipment" magazine among the top 100 products.

**2005**

CASE produces its 500,000th backhoe.

**2012**

CASE achieves Tier 4 emissions standards while delivering best-in-class breakout force and lift capacity.

**2016**

CASE backhoe offering is enlarged introducing "In-Line cylinders" backhoe and "Straight-Loader arm" options.

**2017**

CASE introduces a Tier 4 final fully customizable backhoe.

**2019**

60th year milestone. Future in the making.

**2020**

CASE presents in North America the industry's first Fully Electric Backhoe Loader (model 580 EV).

**2021**

CASE introduces a Stage V TLB with a brand-new cab, bringing operator comfort to the next level.

# SV-SERIES BACKHOE LOADERS

## THE KINGS

### CASE BACKHOE LOADERS

#### *The original, ready for anything*

Since introducing the first ever integrated backhoe loader in 1957, CASE has always been a front runner in the tractor loader backhoe industry.

We have built a strong heritage of industry firsts, on best-in-class performances and components, supremely reliable and well-proven technology, and productivity-boosting solutions.

It's no surprise, then, that faced with the challenge of meeting Stage V emissions regulations, we did it "the CASE way".

- + We accepted no compromise on performances: the new 3.6-litre FPT Stage V engine maintains the same best-in-class power and torque density of its Stage IV predecessor.
- + We designed with FPT an After-Treatment System specifically for backhoe loader applications - because we know them inside out!!

And we did not limit our efforts to power and performance: with the SV-Series we have taken operator comfort to the next level!

- + The new cab is wider to provide more room for the operator.
- + The new cab is more ergonomic
- + The new cab has a completely new interior and exterior style

Now it's time to enhance our Customer's experience with the NEW SV-SERIES BACKHOE LOADERS.



# SV-SERIES BACKHOE LOADERS

## OPERATOR COMFORT TO THE NEXT LEVEL



### NEW WIDER CAB

#### FEATURES

- + **NEW** Restyled interior and exterior
- + **NEW** Front and LH consoles design
- + **NEW** Superior roominess for the operator
- + **NEW** Noise level reduced to 74dB
- + **NEW** layout of switches and controls
- + **NEW** Wider Pilot Control towers adjustability
- + **NEW** Best in class internal storage capacity:  
4 times more than ST Series cab, including:  
2 Lockable compartments, 2 Bottle/Cup holder, Cooling  
Box and 4 open trays
- + **NEW** Excellent 360° Visibility
- + King class seat: the super deluxe air suspension option  
offers premium features
- + Powerful Air Conditioning and fully  
openable windows

#### BENEFITS

- Greater operator comfort and improved ergonomics
- Superior cab accessibility
- Excellent knee and feet clearance when rotating  
the seat from loader to backhoe position
- A quiet place to work!
- Easy reachability in both loader and backhoe position
- Better ergonomics
- A place to store every item and to keep your lunch  
and drinks always fresh
- More productivity and safety on the job site  
and in the street
- Height, lumbar and armrests full adjustability,  
and heating
- Excellent cab ventilation




## CAB FEATURES FOR A MORE PLEASANT AND SAFE WORKING DAY AND DRIVE

FEATURES	BENEFITS
+ <b>NEW</b> Bluetooth radio option	Located on right hand pillar, easy reachability in any position
+ <b>NEW</b> Speedometer option	Located on front console, more safety when driving
+ <b>NEW</b> 2 speed wiper	Better visibility when driving in rainy/snowy conditions
+ <b>NEW</b> F-N-R switch on loader handle	Easy transmission direction change in loading applications
+ <b>NEW</b> Roller switch on pilot joysticks	Quick and precise dipper extension
+ <b>NEW</b> Cell-phone holder	Located on right hand pillar, easy reachability in any position
+ <b>NEW</b> 12V and USB ports	Conveniently located on the right-hand console
+ <b>NEW</b> Anti-Theft system	Peace of mind
+ 10 LED working lights option	Your work in dark conditions will be as bright as ever

# SV-SERIES BACKHOE LOADERS

## SUSTAINABLE PERFORMANCE

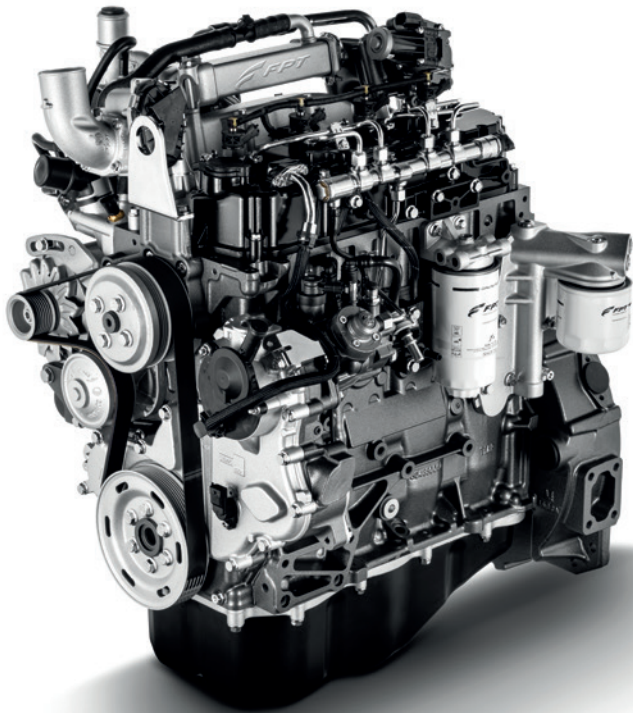

### AS POWERFUL AS EVER!

Notwithstanding the stringent Stage V emission requirements, we accepted no compromise on performance!

The **NEW** 3.6-litre **FPT Stage V engine** maintains the same **best-in-class power and torque density** of its Stage IV predecessor.

---

### F36

3.6 lt 4 cylinders

16v, Common Rail Injection

---

### Compact Hi-eSCR2

### LOW EMISSIONS

- + The **NEW** 3.6-litre FPT engine dramatically reduces emissions, meeting Stage V stringent requirements with **no fuel and urea consumption deterioration vs Stage IV**,
- + **NEW Compact Hi-eSCR2 After Treatment system** designed with FPT specifically for Backhoe loader applications
- + **NEW ECO mode** is standard on all units and delivers **10% fuel consumption saving**
- + Environmentally friendly!!
  - **NEW Auto Engine Shutdown:** Automatic engine switch off when the machine is inactive for more than 3 minutes
  - **NEW Auto Idle:** Automatic reduction of engine speed when the machine is inactive for more than 5 seconds
  - Fully HVO diesel compatible
  - Biodegradable lubricants option available





### SAFE, EASY AND LOW-COST MAINTENANCE

- + **One side engine serviceability** layout and all fuses and relays comfortably located in the cab for easy and fast maintenance operations
- + **Maintenance free After Treatment System** for reduced operating costs and maximized vehicle uptime
- + Minimum operating costs with **500 hours oil change interval and efficient low-rate EGR combustion (<10%)**
- + **Auto Engine protection shutdown** feature turns off automatically the engine when the most critical engine and transmission parameters are detected to be outside proper working conditions. Another solution that minimizes the costs of extraordinary maintenance!

# SV-SERIES BACKHOE LOADERS

## VERSATILITY FOR HIGH PRODUCTIVITY



### CASE DNA BACKHOE

- + **Exclusive outer extendahoe:** all components in contact with the soil are **protected** against impact and material accumulation
- + The curved main boom provides greater digging ability and makes it easier to load a truck
- + **Low profile for easy transport**
- + **Patented CASE DNA integrated hydraulic quick coupler** allows changing over the backhoe attachments from the cab with a simple switch whilst preserving backhoe performance just as if the attachments were direct fit.
- + Gripper teeth for **excellent material retention**
- + **Swing Dampening** for precise backhoe operations and improved operator comfort.

### TOOL CARRIER LOADER ARM

- + **NEW Hydraulic quick coupler** for easy and quick attachments swap.
- + The loader's **excellent lift capacity combined with the mechanical parallel lifting** delivers greater productivity.







### IN-LINE CYLINDER BACKHOE

- + **Great visibility** thanks to the narrower frame
- + High stress resistance thanks to the balanced effort distribution along the boom
- + **NEW Hydraulic quick coupler** for easy and quick attachments swap
- + **Swing Dampening** for precise backhoe operations and improved operator comfort

### STRAIGHT LOADER ARM

- + **Top loading reach and lifting capacity:** the perfect solution for professionals requiring a particularly high tipping point.
- + The simple structure ensures **great visibility** and low maintenance costs
- + **Anti-tipping function** keeps the bucket in the correct position while lifting the load, with no risk of material spillage



# MAIN REASONS TO CHOOSE THE NEW SV-SERIES

## PRODUCTIVITY / PERFORMANCE

- + **Best in class engine power and torque**
- + **Top of the industry Loader arm and Backhoe Lifting, Loading and Digging performances**
- + **NEW** F-N-R switch on loader handle for **easy transmission direction change** in loading applications
- + **NEW** Roller switch on pilot joysticks for **quick and precise dipper extension**
- + Protected Backhoe operations with the **powerful Case DNA backhoe**
- + **Patented CASE DNA integrated hydraulic quick coupler**
- + **Hydraulic side shift** enables easy and quick backhoe repositioning in all working conditions, while also preserving all types of soil.

## COMFORT

- + **NEW** Superior in-cab **roominess** for the operator
- + **NEW** **Bluetooth radio and speedometer** options for a more pleasant and safe working day and drive
- + **NEW** **Excellent visibility** for productive and safe loader and backhoe operations.
- + **NEW** **Top of the industry in-cab storage compartment capacity**
- + Fully openable windscreens for **excellent cab ventilation**
- + **10 LED working lights:** bright work even in the darkest conditions.



## TOTAL COST OF OWNERSHIP

- + **NEW** The 3.6-litre **FPT Stage V engine** dramatically reduces emissions with **same fuel consumption as Stage IV engine** and ensures **low maintenance costs**
- + **NEW ECO mode** is standard on all units and provides 10% fuel consumption saving
- + **NEW Auto engine shutdown and Auto idle:** you can **save fuel** and be **environmentally friendly** at the same time
- + **Variable Volume Pump** reduces consumption, by providing oil only when needed
- + Coming from a backhoe loader industry leader means not only a rich heritage, but also **proven technology and best-in-class suppliers.** This translates into **high reliability, more uptime, more productivity, and lower maintenance costs.**

## 360° SERVICE SOLUTIONS

- + **CASE SiteWatch™** makes fleet management easy, helping improve your productivity and profitability
- + **NEW CASE SiteConnect** enables your dealer to be proactive in managing your machine, boosting its uptime
- + **NEW CASE Protect extended warranty** and **CASE Care planned maintenance** give you full peace of mind



# SV-SERIES BACKHOE LOADERS

## CASE SERVICE SOLUTIONS



**CASE Service Solutions is a 360° service package** that covers different dimensions of your experience with the CASE equipment to boost productivity and improve the machine's Uptime.

It includes our Connected Services offering: **CASE SiteWatch™**, a complete fleet management tool, helps you secure your fleet and provide valuable machine information to improve your productivity and profitability. **CASE SiteConnect** enables your dealer to be proactive in supporting your machine and boosting its uptime.

It also means full peace of mind thanks to **CASE Protect**, our extended warranty program, and **CASE Care**, the planned maintenance for CASE customers. We also offer **CASE Fluid Analysis** to prevent major failures, maximize your machine's reliability and extend its lifetime.

In other words, **CASE Service Solutions** will keep the equipment in top condition with maximum uptime, no unexpected costs and optimized profitability!


# 580SV – 590SV – 695SV

## MAIN SPECIFICATIONS

SPECIFICATIONS	580SV	590SV	695SV
<b>ENGINE</b>			
Make and Model	FPT F5C - F5MGL413B		FPT F5C - F5MGL413A
Injection system	High Pressure Common Rail		
Emissions level	Stage V		
# of cylinders	4		
Bore / Stroke	102 mm x 110 mm		
Displacement / Compression ratio	3.6 ltr / 17 to 1		
Engine rated Power (ISO 14396)	72 KW (97 hp) @ 2200 rpm	82 KW (110 hp) @ 2200 rpm	
Max Net Power	84 KW (112 hp) @2000 rpm	89 KW (119 hp) @1900 rpm	
Maximum torque (ISO 14396)	453 Nm @ 1400 rpm	460 Nm @ 1400 rpm	
Engine speeds	2200 rpm (rated speed at full load) / 900-1000 rpm (low speed at no load)		
<b>TRANSMISSION</b>			
	4WD		
Type	Powershuttle	Powershift	Powershift
Model	Carraro TLB1 PB 4WD	Carraro TLB2 MPB 4WD	Carraro TLB2 MPB 4WD
Forward travel speeds	6 - 10 - 21 - 40 (km/h)		
Reverse travel speeds	7-12-26-47 (km/h)	7-12-26 (km/h)	7-12-26 (km/h)
			8 - 13 - 29 (km/h)
<b>FRONT AXLE</b>			
Model	4WD Heavy duty		4WD with limited slip differential
Oscillation	+/- 11°		+/- 8°
<b>REAR AXLE</b>			
Model	Carraro 28.44FR with Differential lock	Carraro 28.50 with Differential lock	Carraro 26.43 with limited slip differential
<b>BRAKES</b>			
Service brakes	Hydraulic foot operated, 2 disc per side		Hydraulic foot operated, 3 disc per side
Parking brakes	Mechanically actuated		
<b>TIRES</b>			
Front	18" or 20"	18" or 20"	28"
Rear	26"/28" or 30"	26"/ 28" or 30"	28"
<b>STEERING</b>			
Type	Power Steering		
System pressure / Displacement	180 bar / 160 cc		
Turning radius 4WD (external radius)	With 18" tires: 4300 mm with brakes off 3600 mm with brakes on		With 28" tires: 8180 mm in 2WS mode with brakes off; 6820 mm in 2WS mode with brakes on; 4810 mm in 4WS mode with brakes off
<b>HYDRAULIC SYSTEM</b>			
Type	Load sensing closed center with twin gear pump (156 l/min @ 2200 rpm) or Load sensing closed center with variable volume pump (6 to 165 l/min @ 2200 rpm)	Load sensing closed center with variable volume pump (6 to 165 l/min @ 2200 rpm)	
Pressure	205 bar	205 bar	205 bar
<b>SERVICE CAPACITIES</b>			
Engine oil	8 l	8 l	8 l
Transmission oil	20.8 l	20.8 l	20.8 l
Rear axle oil	21.2 l	21.2 l	13.6 l
Hydraulic oil	142 l	142 l	142 l
Fuel tank	131 l	131 l	131 l
DEF tank	13.2 l	13.2 l	13.2 l
Coolant	24 l	24 l	24 l
<b>ELECTRICAL SYSTEM</b>			
Voltage	12 V	12 V	12 V
Battery	Single: 95 Ah 900 A or Double: 60 Ah, 600 A (each)		
Alternator	120 A	120 A	120 A
<b>CAB</b>			
Certification	ROPS / FOPS	ROPS / FOPS	ROPS / FOPS
Air Conditioning	Optional	Optional	Optional
Storage compartments capacity	45 l including: 2 lockable, cooling box		
Speedometer	Optional	Optional	Optional
Bluetooth radio	Optional	Optional	Optional
<b>NOISE</b>			
Internal (cab)	74 dB(A)	74 dB(A)	74 dB(A)
External	101 dB(A)	102 dB(A)	102 dB(A)

# 580SV – 590SV

## DIMENSIONS AND SPECIFICATIONS

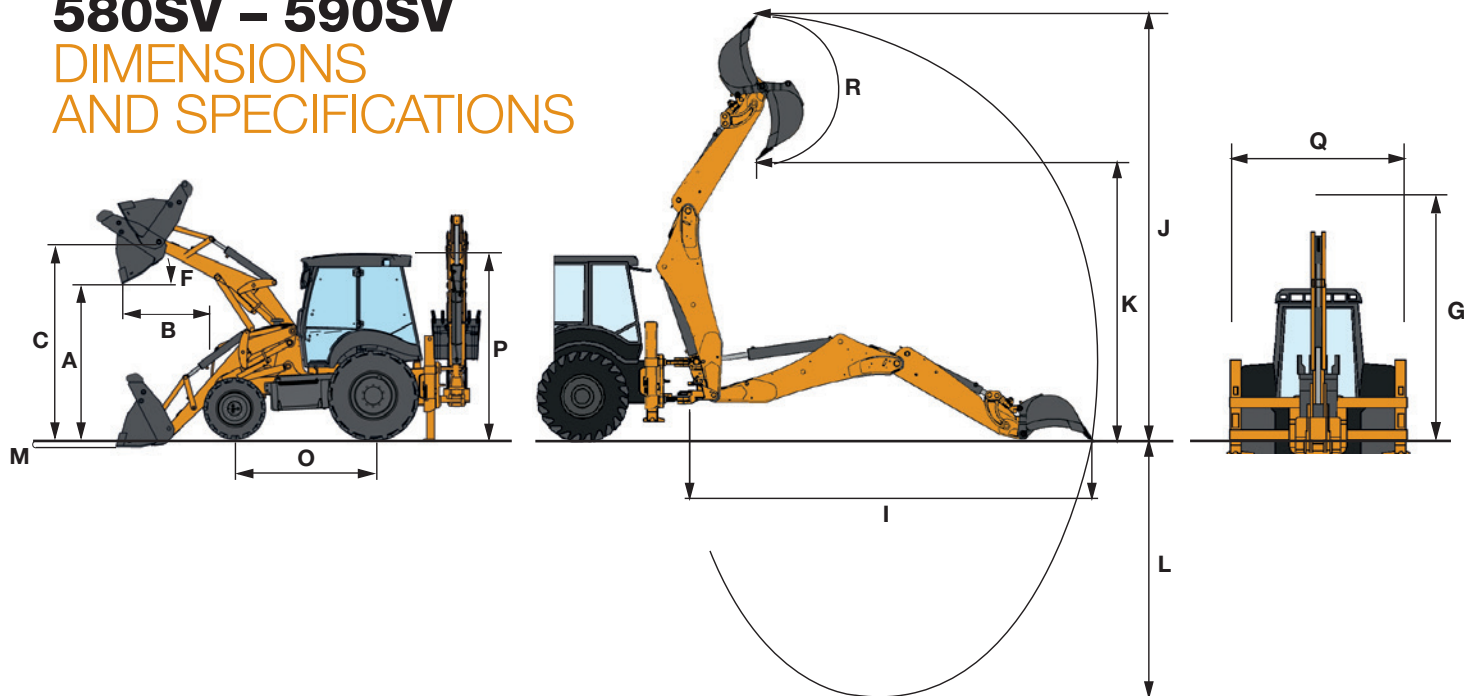

GENERAL DIMENSIONS		580SV - 590SV				580SV				
		TOOL CARRIER LOADER ARM		STRAIGHT LOADER ARM						
LOADER (4WD configuration)		Std bucket		4 x 1 bucket		Std bucket		4 x 1 bucket		
A	Maximum dump height under bucket at 45°	mm	2606	2618	2711	2726				
B	Dump Reach at full height	mm	844	825	815	785				
C	Maximum height pin	mm	3460	3458	3490	3490				
F	Dump angle	°		46		45				
M	Below ground level digging depth	mm	166	170	105	157				
	Maximum lifting capacity @ ground level	kg		5670		4731				
	Maximum lifting capacity @ max height	kg	3934	3572	3553	3290				
	Loader breakout force	daN		4910		3804				
	Bucket breakout force	daN		6338		5985				
		CASE DNA BACKHOE		IN-LINE CYLINDER BACKHOE		CASE DNA BACKHOE		IN-LINE CYLINDER BACKHOE		
BACKHOE		Std Dipper	Extendable Dipper	Std Dipper	Extendable Dipper	Std Dipper	Extendable Dipper	Std Dipper	Extendable Dipper	
	Backhoe size	ft	14 (580SV)	14 (580SV)	15 (590SV)	15 (580SV, 590SV)				
	Swinging angle	°	180							
I	Maximum reach from swing center	mm	5695	6699	5612	6286	5967	7111	5862	6991
J	Maximum operating height	mm	5802	6713	5425	6173	6043	7069	5616	6348
K	Maximum loading height	mm	3859	4752	3658	4424	4098	5124	3867	4601
L	Maximum digging depth	mm	4448	5514	4385	5627	4750	5965	4666	5881
R	Bucket rotation	°	198		203 (max amp hole)		198		203 (max amp hole)	
	Bucket breakout force	daN	5326		5971 (max force hole)		6114		5971 (max force hole)	
	Dipper breakout force	daN	3240	2375	3767	2592	3362	2420	3358	2389
OVERALL DIMENSIONS		CASE DNA BACKHOE				IN-LINE CYLINDER BACKHOE				
G	Boom height (transport position)	mm	3560				3880			
O	Wheel base	mm					2175			
P	Cab height	mm					2950			
Q	Overall width with standard loader bucket	mm					2430			
	Minimum ground clearance	mm					348			


WEIGHTS		580SV - 590SV	
	Maximum operating weight	kg	9580

OPTIONAL BUCKETS					
LOADER	Capacity (SAE ltr)	CASE DNA BACKHOE	Capacity (SAE ltr)	IN-LINE-CYLINDER BACKHOE	Capacity (SAE ltr)
Standard	1000 / 1200	300 mm backhoe trenching	80	300 mm backhoe trenching*	80
4 x 1	1000 / 1150	400 mm backhoe trenching*	110	457 mm backhoe trenching*	140
6 x 1	1000 / 1150	450 mm backhoe trenching*	120	610 mm backhoe trenching*	180
		610 mm backhoe trenching*	180	760 mm backhoe trenching*	260
		760 mm backhoe trenching	260	915 mm backhoe trenching*	320
		900 mm backhoe trenching*	300		
		1500 mm Ditch Cleaning	280		

\* Standard and Heavy Duty versions

# 695SV

## DIMENSIONS AND SPECIFICATIONS

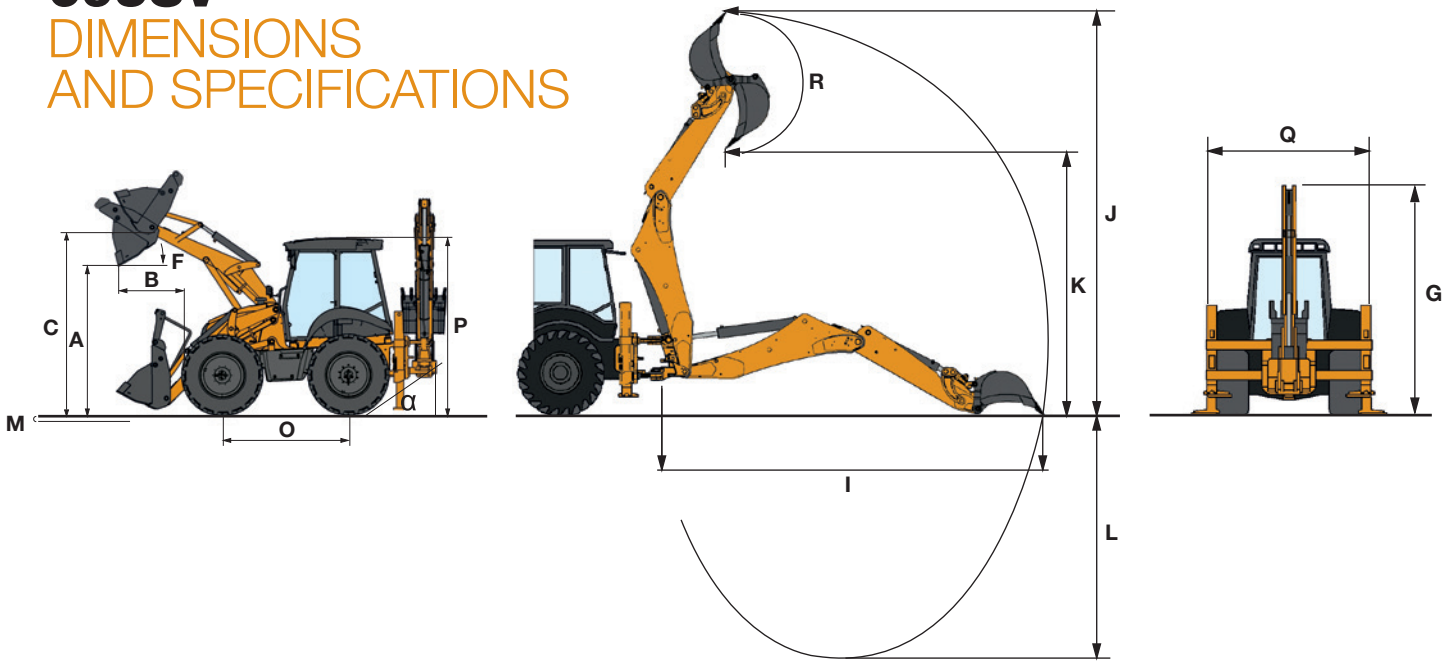

### GENERAL DIMENSIONS

695SV

LOADER	TOOL CARRIER LOADER ARM				
		Std bucket	4 x 1 bucket		
A Maximum dump height under bucket at 45°	mm	2708	2718		
B Dump Reach at full height	mm	799	782		
C Maximum height pin	mm	3531	3531		
F Dump angle	°		46		
M Below ground level digging depth	mm	93	97		
Maximum lifting capacity @ ground level	kg		5350		
Maximum lifting capacity @ max height	kg	3934	3572		
Loader breakout force	daN		4350		
Bucket breakout force	daN		5240		
BACKHOE	CASE DNA BACKHOE		IN-LINE CYLINDER BACKHOE		
		Std Dipper	Extendable Dipper	Std Dipper	Extendable Dipper
Backhoe size	ft	15		15	
Swinging angle	°	180			
I Maximum reach from swing center	mm	5961	7111	5862	6991
J Maximum operating height	mm	6043	7069	5616	6348
K Maximum loading height	mm	4098	5124	3867	4601
L Maximum digging depth	mm	4750	5965	4666	5881
R Bucket rotation	°	198		203 (max amp hole)	
Bucket breakout force	daN	6114		5971 (max force hole)	
Dipper breakout force	daN	3362	2420	3358	2389
OVERALL DIMENSIONS	CASE DNA BACKHOE		IN-LINE CYLINDER BACKHOE		
G Boom height (transport position)	mm	3692		4013	
O Wheel base	mm	2220		2220	
P Cab height	mm	3060		3060	
Q Overall width with standard loader bucket	mm	2480		2480	
Ramp angle	°	34		34	

### WEIGHTS

695SV

Maximum operating weight	kg	9970
--------------------------	----	------

### OPTIONAL BUCKETS

LOADER	Capacity (SAE ltr)	CASE DNA BACKHOE	Capacity (SAE ltr)	IN-LINE-CYLINDER BACKHOE	Capacity (SAE ltr)
Standard	1200	300 mm backhoe trenching	80	300 mm backhoe trenching*	80
4 x 1	1150 / 1200	400 mm backhoe trenching*	110	457 mm backhoe trenching*	140
6 x 1	1150 / 1200	450 mm backhoe trenching*	120	610 mm backhoe trenching*	180
		610 mm backhoe trenching*	180	760 mm backhoe trenching*	260
		760 mm backhoe trenching	260	915 mm backhoe trenching*	320
		900 mm backhoe trenching*	300		
		1500 mm Ditch Cleaning	280		

\* Standard and Heavy Duty versions

# BUILDING A STRONG CASE.

Since 1842, at CASE Construction Equipment we have lived by an unwavering commitment to build practical, intuitive solutions that deliver both efficiency and productivity.

We continually strive to make it easier for our customers to implement emerging technologies and new compliance mandates.

Today, our global scale combined with our local expertise enables us to keep customers' real-world challenges at the center of our product development.

The vast CASE dealers' network is always ready to support and protect your investment and exceed your expectations, while also providing you with the ultimate ownership experience.

Our goal is to build both stronger machines-and stronger communities. At the end of the day, we do what's right for our customers and our communities so that they can count on CASE.

---

**CNH Industrial**  
Deutschland GmbH  
Case Baumaschinen  
Benzstr. 1-3 - D-74076 Heilbronn  
DEUTSCHLAND

**CNH Industrial**  
Maquinaria Spain, S.A.  
Avenida Aragón 402  
28022 Madrid - ESPAÑA

**CNH Industrial France, S.A.**  
16-18 Rue des Rochettes  
91150 Morigny-Champigny  
FRANCE

**CNH Industrial Italia Spa**  
Lungo Stura Lazio 19  
10156, Torino  
ITALIA

**CASE Construction Equipment**  
Cranes Farm Rd  
Basildon - SS14 3AD  
UNITED KINGDOM

---

NOTE: Standard and optional fittings can vary according to the demands and specific regulations of each country. The illustrations may include optional rather than standard fittings - consult your Case dealer. Furthermore, CNH Industrial reserves the right to modify machine specifications without incurring any obligation relating to such changes.

Conforms to directive 2006/42/EC

**CASECE.COM**  
**00800-2273-7373**

The call is free from a land line.  
Check in advance with your Mobile Operator if you will be charged. Toll free number not available from all calling areas.

