

**D-SERIES CRAWLER EXCAVATORS**  
**CX490D / CX500D ME**  
**STAGE V**

**CASE**  
CONSTRUCTION



**IT'S TIME**  
**FOR MORE**

[www.casece.com](http://www.casece.com)  
**EXPERTS FOR THE REAL WORLD**  
**SINCE 1842**

# HERITAGE

## A TRADITION OF INDUSTRY FIRSTS



### EXPERTS FOR THE REAL WORLD

#### SINCE 1842

**1842** CASE is founded.

**1869** The first CASE portable steam engine - road construction is born.

**1957** The first factory - integrated loader/backhoe in the world: a CASE industry first.

**1969** CASE begins skid steer loader production.

**1992** Sumitomo becomes supplier to CASE Corporation distributing excavators ranging from 7 to 80 tons.

**1998** Global Alliance signed

between CASE Corporation and Sumitomo.

**2001** CASE introduces the first of its CX excavators, powerful new "thinking machines" designed to enhance productivity through onboard intelligence features.

**2007** CX210B is awarded the «Good Design Award» by the design Academy of Japan.

**2008** CX210B wins the 18<sup>th</sup> «Energy Conservation Award» from the Agency for Natural Resources and Energy of the Japanese

Ministry of Economy. **2011** CASE becomes the first construction equipment manufacturer to offer both selective catalytic reduction and cooled exhaust gas recirculation as solutions to meet stringent emissions standards.

**2015** CASE launches the new "D-Series" Tier 4 final/ EU Stage IV Crawler Excavators.

**2018** Stage V production for models CX350D and above.

# CRAWLER EXCAVATORS D-NA

## BUILT TO LAST AND CONTROL



### HIGH RELIABILITY

Improved D-design for D-urable performances

- The boom and arm have been redesigned according to the latest stress analysis criteria to reduce stress points.
- The undercarriage has been redesigned and reshaped to facilitate the welding process, enhancing the reliability of the fabricated structures. The one-side-slope lower frame design reduces the time needed to clean the undercarriage.
- The size of the undercarriage component has been increased, especially in those parts where a high level of protection is required for components.

### HIGH QUALITY

Accurate, simple and robust design for high durability

- True to CASE's enviable reputation for reliability and durability, the D-Series delivers leading design solutions and manufacturing quality.



### HIGH PRECISION AND CONTROLLABILITY

Smooth control with the CASE Intelligent Hydraulic System

The proven CASE Intelligent Hydraulic System (CIHS) delivers energy savings in all cycle time phases (digging, boom up and swing, dumping).



## CX500D MASS EXCAVATOR

A dedicated model for mass excavation provides outstanding breakout force performance. With a special heavy duty attachment, bigger bucket cylinder and optimized kinematics, the CX500D ME works with larger buckets than the CX490D, delivering industry leading speed, productivity and efficiency.



## FAST CYCLES

High performance hydraulics control

- The new electrically controlled pumps deliver faster cycle times.
- Oil flow can be adjusted according to working needs, or increased smoothly while starting travel and boom down.
- As a result, the machine responsiveness to operation load is multiplied, resulting in cycle times up to 10% faster than the previous generation.



## HIGH VERSATILITY

Working modes easily adapt to every work load

- A** MODE for grading, lifting and precision work.
- H** MODE the best balance between productivity and fuel economy.
- SP** MODE extra speed and power for the most demanding jobs that require maximum productivity.

**Auto Power Boost** automatically increases hydraulic pressure according to the operation's demands.

## Undercarriage and track to match different customer needs

A retractable undercarriage is available for easy transportation to your jobsite as an alternative to the LC chassis. Different sizes of track shoes are available, including the 600 mm double grouser shoes for CASEs when greater traction is needed.



## HIGH EFFICIENCY: THE SECRET

Great performances with low fuel consumption

**CASE Intelligent Hydraulic System (CIHS)** reads continuously the load pressure through strategic sensors and like an ORCHESTRA DIRECTOR gives always and in real time the right balance for any type of job, providing solid fuel saving opportunities. It consists of 5 Energy Saving controls:

- Torque control decreases main pump loads to prevent a drop in engine rpm, with improved sensitivity to control.
- Boom Economy Control (BEC) increases fuel efficiency during boom lower and swing operations.
- Swing Relief Control (SWC) carefully manages the hydraulic power distribution in slewing operations.
- Spool Stroke Control (SSC) creates an automatic pressure adjustment during digging and leveling operations.
- Idle functions: the Auto Idle function lowers engine rpm after 5 seconds of lever inactivity whatever the throttle position, while the Idle Shutdown function shuts the engine down after a pre-set time of inactivity. Both are manually switchable.



## CLEANER (STAGE V)

EU Stage V compliant CASE engines

- The new STAGE V engine meets the latest EU standards for engine exhaust emissions that sets new limit for particle number (PN) and further reduced particulate matter (PM) levels.
- Water separator sensor linked to a dedicated message on machine monitor to drain water when level in filter is too high.
- New safety filter (maintenance free) to protect the engine from dust during the main filter replacement.
- The closed circuit ventilation system makes sure the oil gas are filtered, separated and sent back to the crankcase, avoiding dispersion into the air.
- The engine of the latest generation with the Variable Geometry Turbocharger, electronically controlled, high pressure common rail ensures great performances and low fuel consumption.
- Largest AdBlue tank in the industry allows longer working time without stopping for AdBlue refill (8-9 fuel refills before a stop). With CASE no time is wasted and your refill is more efficient and safe.



## COMFORTABLE AND SAFE CAB

The ultimate interior cab configuration

- Superior cab structure with ample legroom for the operator.
- Fully adjustable workstation.
- New ergonomically designed high back seat with air suspension for excellent comfort, plus seat tilting adjustment and seat heater.
- Top class features include the 178 mm colour LED monitor, Bluetooth tuner and DAB+ radio, spacious storage compartment, 12V accessory plug, clipboard holder, mobile phone holder, warm and cool box, fuse box service connection, storage tray and ergonomic arm rest.
- Reinforced structure of the cab compliant with ROPS/FOPS requirements.
- Standard head protection approved to FOPS level 2.
- Optional front guards level 1 and 2
- Factory fitted travel alarm for greater safety on the jobsite around the machine.



## OUTSTANDING VISIBILITY & QUIET WORK ENVIRONMENT

- Outstanding visibility with ample glazed surface, right and rear camera.
- Soundproof pressurised cab
- The cushioning system lowers noise and vibration levels for the operator's ultimate comfort.



# D-SERIES CRAWLER EXCAVATORS

# SAFETY AND MAINTENANCE WORK SAFELY IN ALL CONDITIONS



## CASE MAXIMUM VIEW MONITOR

option with its bird's eye and panoramic view improves operator's safety by:

- 270° wide vision.
- 3 cameras.
- 7 inch full color monitor.
- Blind spots eliminated by image processing.
- Led lighting package LED lights for increased visibility in low light conditions.
- Safety on the jobsite around the machine.



## STANDARD HYDRAULIC REVERSABLE FAN

- Hydraulically-driven cooling fan contributes to lower noise output and improvements in fuel consumption. The reversing mode helps to reduce maintenance needs.



## SAFE ACCESS TO UPPERCARRIAGE

Solid and robust platform and handrails

- Wide, robust and comfortable steps for safe access to the top of the hood.
- Solid handrail for protection on the top of the hood.
- Non-slip plates and top hood cover are supported by 2 gas pistons and secured by 2 mechanical stops when open.
- Solid platform (80 cm wide) on top of the engine compartment to provide a stable base for the technician working on the engine compartment.



## EASY MAINTENANCE

CASE stays «grounded»

- All filters and regular fill points are grouped for easy access.
- Engine oil change intervals set at 500 hours.
- Radiator and cooler cores mounted side by side for easy access.
- Standard 100 l/min refueling pump with automatic cut off.
- Optional hydraulic and engine oil sampling port accessible at ground level for easy oil check.
- Battery shutdown switch for safe maintenance on the electrical system.
- All the D-Series crawler excavators feature the Extended Maintenance System (EMS) bushings, providing 1,000 hour greasing intervals on all pins except the attachment linkage.



# MAIN REASONS TO CHOOSE THE D-SERIES



## THE SECRET FOR HIGH PRECISION AND CONTROLLABILITY

is the CASE Intelligent Hydraulics System (CIHS) which is the result of continuous pursuit of perfection of a legendary brand. CASE is synonymous and reference in the market for its fastest cycles times, best energy saving performance and smooth control



## HIGH RELIABILITY

Reliability and durability with the new redesigned arm, boom and undercarriage



## HIGH VERSATILITY

- 3 available power modes to match customer needs (A, H, SP)
- Auto Power boost job-sensing hydraulic pressure increase.
- Retractable undercarriage or LC chassis
- Wide offering of track shoes size, included the 600 mm steel double grouser shoes



## HIGH EFFICIENCY

- Energy saving system to take advantage of all fuel saving opportunities: up to 8% more fuel efficiency
- High levels of AdBlue autonomy (152 l). With CASE no time is wasted and your refill is more efficient and safe
- Maximum torque increased at lower rpm (improved engine response)



## 10% FASTER

- New electronically controlled hydraulic pumps



## OUTSTANDING VISIBILITY

- Wide glazed area
- Rear and side view
- Large LED monitor
- LED lighting package



## SMOOTH RIDE, QUIET WORK ENVIRONMENT

- Cab with cushioning system
- Low noise and vibration



## COMFORTABLE AND SAFE CAB

- Extra spacious cab
- Fully adjustable workstation
- New high back seat
- Rops cab and FOPS level 2 standard



## STAGE V ENGINE

in line with the latest EU standard for engine exhaust emissions:

- new ATS with DPD filter (Diesel Particulate Diffuser)
- new closed PCV system (Positive Crankcase Ventilation)



## SAFE OPERATION AND MAINTENANCE

- New fuel filter supply line with no need to flush after filter replacement thanks to a safety filter (maintenance free)
- Fuel prefilter water sensor with dedicated message on cabin monitor
- Standard extended handrails
- Factory fitted travel alarm
- Maintenance points grouped for easy and safe access



# AFTERSALES PRODUCTS AND SERVICES

## AFTERSALES PRODUCTS

Keep your equipment performing at its best and protect your investment's value with the extensive offering of high-quality CASE Parts.

### Genuine Parts HIGH PERFORMANCE

Optimize your performance and add value to your machine with high-quality genuine parts.

### FLEETPRO™

Ensure your machine's performance beyond warranty and manage your budget with CASE's quality second-line range of parts.

### Attachments. BUSINESS SOLUTIONS

Add versatility to performance with CASE attachments designed for CASE machines and tested by CASE engineers.

### Reman-Parts REMANUFACTURED

Choose sustainable quality with remanufactured parts designed for CASE equipment of all ages.

## SERVICE SOLUTIONS

Enjoy the peace of mind of knowing CASE Service Solutions will keep your equipment in top condition with maximum uptime, no unexpected costs, and help you optimize your profitability.



# STANDARD AND OPTIONS

## STANDARD EQUIPMENT

### ENGINE

Isuzu 6-cylinder turbo-charged diesel  
EU stage V certified  
Selective Catalytic Reduction (SCR)  
Diesel Oxidation Catalyst (DOC)  
Cooled Exhaust Gas Recirculation (CEGR)  
Diesel Particulate Diffuser (DPD)  
VGT turbocharger  
Electronic fuel injection  
High pressure common rail system  
Neutral safety start  
Auto-engine warm up, emergency stop  
Glow-plug pre-heat  
Engine Protection Feature (EPF)  
Dual-stage fuel filtration  
Dual element air filter  
Remote oil filter  
Green plug oil drain  
500-hour engine oil change interval  
24V system  
Battery disconnect switch  
High ambient temperature cooling package  
External fuel and AdBlue gauges  
Fuel cooler  
Fuel filter restriction indicator  
Fuel prefilter water sensor with dedicated message on cabin monitor  
Fuel shut-off valve  
Idle start  
Radiator, oil cooler, intercooler – protective screen  
Hydraulic reversing cooling fan  
Refueling pump  
Engine precleaner self-cleaning cyclonic type

### FUEL ECONOMY SYSTEMS

Engine Idle/Fuel Economy System:  
Auto-idle  
One-touch idle  
Auto-idle shut-down  
Torque control  
Boom Economy Control (BEC)  
Swing Relief Control (SWC)  
Spool Stroke Control (SSC)

## OPTIONAL EQUIPMENT

### HYDRAULICS

Low-flow circuit, proportional control

### ATTACHMENTS

HD arm 2.50 m (CX490D)

### OPERATOR STATION

Front cab guard - vertical bars (OPG level 2)  
Front cab guard - vertical bars (OPG level 1)  
CASE Maximum View Monitor (CMVM) - 3 cameras system

### HYDRAULICS

Electronically controlled hydraulic pumps  
Auto power boost  
Multifunction (hammer/high flow) circuit with electrical proportional control, manual 3-way valve selection  
Auto travel speed change  
Selectable work modes  
Overload warning device  
ISO pattern controls  
Pre-set auxiliary pump settings  
Manual lever for auxiliary selection outside cab  
Auxiliary valve  
Hydraulic filter restriction indicator  
Oil cooler  
5,000 hour hydraulic oil change interval  
2,000 hour hydraulic filter change interval

### UPPERSTRUCTURE

ISO mirrors  
Handrail - RH access  
Isolation mounted cab (fluid and spring)  
Lifting eyes for counterweight  
Lockable fuel cap, service doors and toolbox  
Rear and side view safety camera

### OPERATOR STATION

ROPS protection  
FOPS guard OPG level 2  
Pressurized cab  
Tempered safety glass  
One-touch lock front window  
Sun visor&rain deflector  
AC/heat/defrost w/auto climate control  
Hot&coolbox, cup holder & ashtray  
Interior dome light  
Cloth covered air-suspension high-back seat  
Sliding seat – 90 mm  
Seat-belt  
Adjustable armrests  
Tilting consoles - 4-position  
Low-effort joystick controls

### UPPERSTRUCTURE

Catwalks  
Hydraulic and engine oil sampling ports

### UNDERCARRIAGE

750 / 900 mm steel triple grouser shoes  
600 mm steel double grouser shoes  
Full track guide

Sliding cockpit 180 mm  
Aux-in port for personal electronics  
Multifunction LED color monitor (180 mm)  
26 selectable languages for monitor  
Anti-theft system (start code system)  
Rubber floor mat  
12V electric socket  
24V cigarette lighter  
One-piece right hand window  
Windshield wiper / washer  
Storage compartments  
On-board diagnostic system  
Travel alarm  
DAB+ radio with antenna and 2-speakers  
9 LED work lights (2 cab roof, 1 LH boom, 1 RH boom, 1 toolbox, 4 all-around)

### ATTACHMENTS

Standard boom 7 m (CX490D)  
Mass Excavation boom 6.5 m (CX500D ME)  
HD arm 3.40 m (CX490D)  
HD Mass Excavation arm 2.50 m (CX500D ME)  
Auxiliary pipe brackets  
Centralized lube bank  
Attachment cushion valve  
Hydraulic quick coupler provision  
Safety valves and bucket linkage with hook

### UNDERCARRIAGE

600 mm steel triple grouser shoes  
Full overlap turntable bearing tub  
Sealed link chain  
Lashing points  
Double track guide

### TELEMATICS

7 years myCASEConstruction subscription with remote monitoring



# CX D-SERIES

## CX490D

### ENGINE

Model	ISUZU 6UZ1XDEV A01
Type	Water-cooled, 4-cycle diesel, 6-cylinder in line, High pressure common rail system (electric control). Turbocharger with air cooled intercooler, SCR & DPD system.
Emissions level	EU N°2016/1628 STAGE V
Number of cylinders/Displacement (l)	6 / 9.84
Bore and stroke (mm)	120 x 145
Rated flywheel horse power	
ISO 14396	270 kW / 362 hp at 2000 min <sup>-1</sup>
with fan-pump	245 kW / 328 hp at 2000 min <sup>-1</sup>
Maximum torque	
ISO 14396	1567 N-m at 1300 min <sup>-1</sup>

### HYDRAULIC SYSTEM

Main pumps	2 variable displacement axial piston pumps with regulating system
Max. oil flow (l/min)	2 x 364 at 2000 min <sup>-1</sup>
Working circuit pressure	
Boom/Arm/Bucket (MPa)	31.4
	34.3 with auto power up
Swing circuit (MPa)	29.4
Travel circuit (MPa)	34.3
Pilot pump	1 gear pump
Max. oil flow (l/min)	30
Working circuit pressure (MPa)	3.9
Boom Cylinders	
Bore (mm)	170
Stroke (mm)	1550
Arm Cylinders	
Bore (mm)	190
Stroke (mm)	1920
Bucket Cylinders	
Bore (mm)	165
Stroke (mm)	1285

### SWING

Swing Motor	Fixed displacement axial piston motor
Maximum swing speed (min <sup>-1</sup> )	6.6
Swing torque (kNm)	150

### FILTERS

Suction filter (µm)	105
Return filter (µm)	6
Pilot line filter (µm)	8

### ELECTRICAL SYSTEM

Voltage (V)	24
Alternator (Amp)	90
Starter (V/kW)	24/5.5
Battery	2 X 12 V - 128 Ah/5HR

### UNDERCARRIAGE

Travel motor	variable displacement axial piston motor
Travel speeds	
High (km/h - automatic travel speed shifting)	5.3
Low (km/h)	3.2
Drawbar pull (kN)	339
	(Fixed sideframe undercarriage)

Number of carrier rollers	
Fixed sideframe undercarriage	2 (each side)
Retractable sideframe undercarriage	3 (each side)
Number of track rollers (each side)	9
Number of shoes (each side)	50

### SOUND LEVEL

External guaranteed sound level (EU Directive 2000/14/EC)	LwA 105 dB(A)
Operator cab sound pressure level (ISO 6396)	LpA 70 dB(A)

### CIRCUIT AND COMPONENT CAPACITIES


Fuel tank (l)	650
Hydraulic system (l)	460
Hydraulic tank (l)	230
Adblue tank (l)	152

### WEIGHT AND GROUND PRESSURE

(with 3.38 m Arm, 2.0 m<sup>3</sup> HD bucket, 600 mm grouser shoes, operator, lubricant, coolant, full fuel tank and FOPS protection level 2.)

CX490D	FIXED SIDEFRAME UNDERCARRIAGE	RETRACTABLE SIDEFRAME UNDERCARRIAGE
Weight	49400 kg	50900 kg
Ground Pressure	0.085 MPa	0.087 MPa
Counterweight	10000 kg	10000 kg

# SPECIFICATIONS

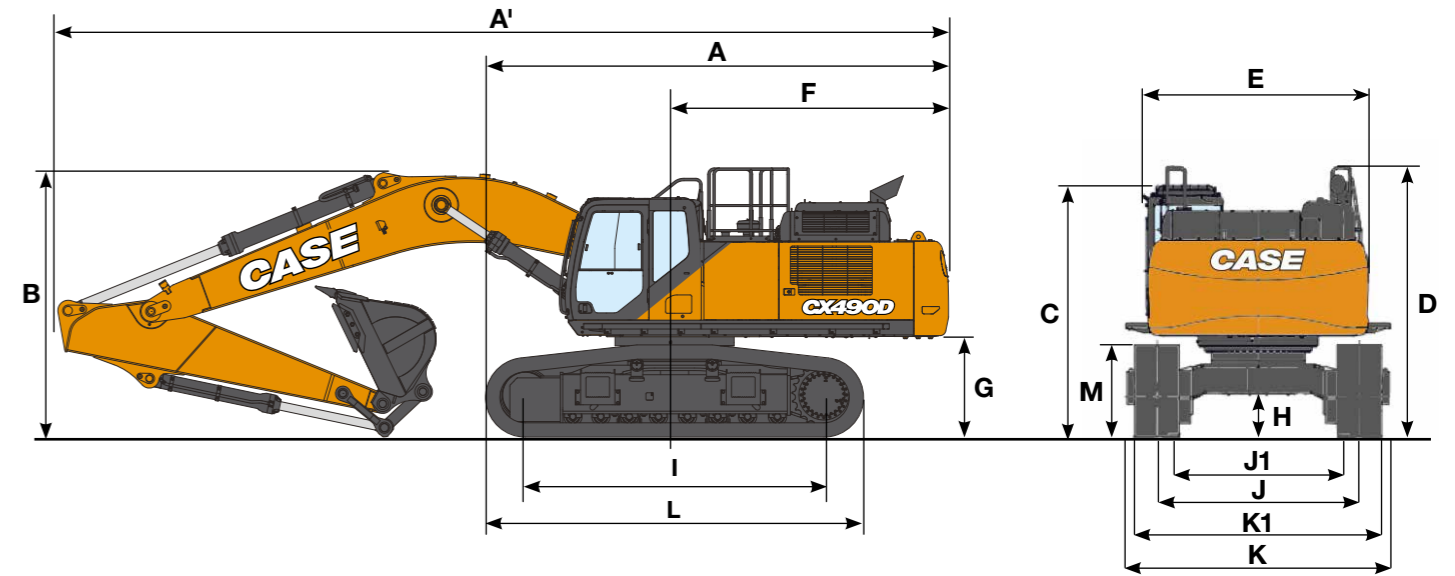

### GENERAL DIMENSIONS


		FIXED SIDEFRAME UNDERCARRIAGE		RETRACTABLE SIDEFRAME UNDERCARRIAGE	
		Arm 3.40 m	Arm 2.50 m	Arm 3.40 m	Arm 2.50 m
A Overall length (without attachment)	mm	6450	6450	6450	6450
A' Overall length (with attachment)	mm	12090	12110	12060	12090
B Overall height (with attachment)	mm	3650	3670	3680	3720
C Cab height	mm	3400	3400	3550	3550
D Overall height (to top of guardrail)	mm	3550	3550	3700	3700
E Upper structure overall width (without catwalks)	mm	3060	3060	3060	3060
Upper structure overall width (with catwalks)	mm	3590	3590	3590	3590
F Swing (rear end) radius	mm	3730	3730	3730	3730
G Clearance height under upper structure	mm	1330	1330	1480	1480
H Minimum ground clearance	mm	535	535	720	720
I Wheel base (center to center of wheels)	mm	4400	4400	4400	4400
L Crawler overall length	mm	5450	5450	5450	5450
M Crawler tracks height	mm	1240	1240	1220	1220
J Track gauge (extended)	mm	2750	2750	2890	2890
J1 Track gauge (retracted)	mm	-	-	2390	2390
K Undercarriage overall width (extended with 600 mm shoes)	mm	3350	3350	3490	3490
K1 Undercarriage overall width (retracted with 600 mm shoes)	mm	-	-	2990	2990

### PERFORMANCE DATA

		FIXED SIDEFRAME UNDERCARRIAGE		RETRACTABLE SIDEFRAME UNDERCARRIAGE	
		Arm 3.40 m	Arm 2.50 m	Arm 3.40 m	Arm 2.50 m
Boom length	mm	6980	6980	6980	6980
Bucket radius	mm	1840	1840	1840	1840
Bucket wrist action	°	176	176	176	176
A Maximum reach at GRP	mm	11750	10980	11720	10980
B Maximum reach	mm	11970	11220	11970	11220
C Max. digging depth	mm	7720	6870	7570	6720
D Max. digging height	mm	11100	10850	11250	11000
E Max. dumping height	mm	7690	7410	7840	7560

### DIGGING FORCE (ISO 6015)

		Arm 3.40 m	Arm 2.50 m
Arm digging force	kN	201	246
with Auto power up	kN	220	269
Bucket digging force	kN	247	247
with Auto power up	kN	270	270

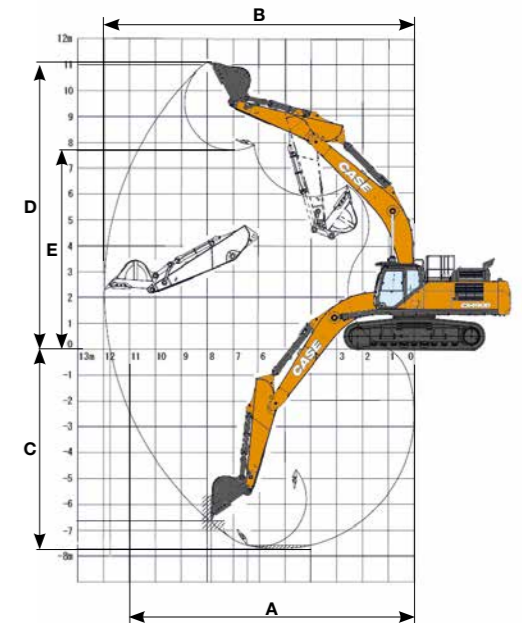

# LIFTING CAPACITY


## CX490D

# BUCKETS




LC - 2.50 m length, 600 mm shoes. Max reach 9.38 m

Height	4.0 m	6.0 m	8.0 m	At max reach	Capacity (m³)	Weight (kg)	Reach (m)		
8.0 m					12390*	11360	7.41		
6.0 m		14290*	14290*	12110*	9860	8730	6.06		
4.0 m		16600*	14230	12860*	9440	11670*	7600	9.22	
2.0 m		18400*	13240	13610*	8990	11670*	7210	9.37	
0 m		18540*	12820	13680*	8720	11700*	7410	9.09	
-2.0 m	22160*	22160*	16940*	12850	12320*	8770	11520*	8370	8.32
-4.0 m	16770*	16770*	12870*	12870*		10480*	10480*	6.09	

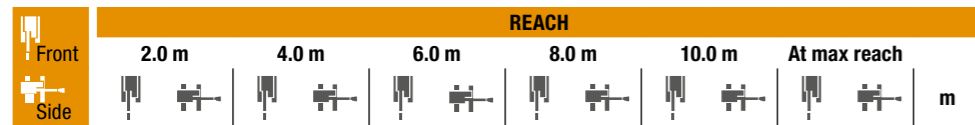


LC - 3.40 m length, 600 mm shoes. Max reach 10.10 m

Height	2.0 m	4.0 m	6.0 m	8.0 m	10.0 m	At max reach	Capacity (m³)	Weight (kg)	Reach (m)
8.0 m							10740*	10240*	8.34
6.0 m							11040*	10020	9.42
4.0 m			15280*	14580	12020*	9520	9660*	6710	9.99
2.0 m			17570*	13410	13050*	8980	10560	6490	10.13
0 m		13260*	13260*	18470*	12750	13540*	8610		9.87
-2.0 m	13250*	13250*	24340*	23560	17680*	12600	12970*	8500	9.16
-4.0 m		20300*	20300*	14860*	12850		10330*	8320	7.09

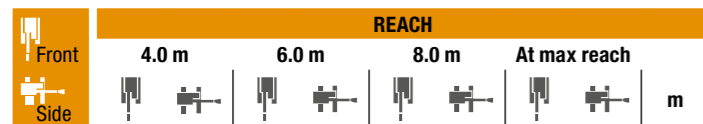

RTC - 2.50 m length, 600 mm shoes. Max reach 9.38 m

Height	4.0 m	6.0 m	8.0 m	At max reach	Capacity (m³)	Weight (kg)	Reach (m)		
8.0 m					12390*	12170	7.41		
6.0 m		14290*	14290*	12110*	10590	11820*	9380	8.06	
4.0 m		16600*	15340	12860*	10150	11670*	8190	9.22	
2.0 m		18400*	14340	13610*	9700	11670*	7790	9.37	
0 m		18540*	13920	13680*	9440	11700*	8000	9.09	
-2.0 m	22160*	22160*	16940*	13950	12320*	9480	11520*	9050	8.32
-4.0 m	16770*	16770*	12870*	12870*		10480*	10480*	6.09	

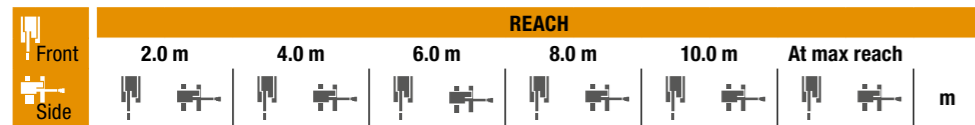

RTC - 3.40 m length, 600 mm shoes. Max reach 10.10 m

Height	2.0 m	4.0 m	6.0 m	8.0 m	10.0 m	At max reach	Capacity (m³)	Weight (kg)	Reach (m)
8.0 m							10740*	10740*	8.34
6.0 m							11040*	10750	9.42
4.0 m			15280*	15280*	12020*	10240	9660*	7230	9.99
2.0 m			17570*	14510	13050*	9700	10640*	7020	10.13
0 m		13260*	13260*	18470*	13850	13540*	9320		9.87
-2.0 m	13250*	13250*	24340*	24340*	17680*	13690	12970*	9210	9.16
-4.0 m		20300*	20300*	14860*	13950		10330*	9640	7.09

## CX490D LC

### HEAVY DUTY BUCKETS (DIRECT FIT)

CAPACITY (ISO7451 HEAPED)	WIDTH	WEIGHT	ARM 2.53 m	ARM 3.38 m
1.04 m³	900 mm	1640 kg	○	○
1.35 m³	1100 mm	1810 kg	○	○
1.50 m³	1200 mm	1940 kg	○	○
1.75 m³	1350 mm	2070 kg	○	○
2.00 m³	1500 mm	2240 kg	○	○
2.33 m³	1700 mm	2410 kg	○	●
2.50 m³	1800 mm	2500 kg	●	▲
2.66 m³	1900 mm	2670 kg	▲	■

### ROCK BUCKETS (DIRECT FIT)

CAPACITY (ISO7451 HEAPED)	WIDTH	WEIGHT	ARM 2.53 m	ARM 3.38 m
1.04 m³	900 mm	1780 kg	○	○
1.35 m³	1100 mm	1950 kg	○	○
1.50 m³	1200 mm	2090 kg	○	○
1.75 m³	1350 mm	2220 kg	○	○
2.00 m³	1500 mm	2390 kg	○	●
2.33 m³	1700 mm	2570 kg	●	●
2.50 m³	1800 mm	2650 kg	●	▲
2.66 m³	1900 mm	2830 kg	▲	■

## CX490D RTC

### HEAVY DUTY BUCKETS (DIRECT FIT)

CAPACITY (ISO7451 HEAPED)	WIDTH	WEIGHT	ARM 2.53 m	ARM 3.38 m
1.04 m³	900 mm	1640 kg	○	○
1.35 m³	1100 mm	1810 kg	○	○
1.50 m³	1200 mm	1940 kg	○	○
1.75 m³	1350 mm	2070 kg	○	○
2.00 m³	1500 mm	2240 kg	○	○
2.33 m³	1700 mm	2410 kg	○	●
2.50 m³	1800 mm	2500 kg	●	●
2.66 m³	1900 mm	2670 kg	●	▲

### ROCK BUCKETS (DIRECT FIT)

CAPACITY (ISO7451 HEAPED)	WIDTH	WEIGHT	ARM 2.53 m	ARM 3.38 m
1.04 m³	900 mm	1780 kg	○	○
1.35 m³	1100 mm	1950 kg	○	○
1.50 m³	1200 mm	2090 kg	○	○
1.75 m³	1350 mm	2220 kg	○	○
2.00 m³	1500 mm	2390 kg	○	○
2.33 m³	1700 mm	2570 kg	○	●
2.50 m³	1800 mm	2650 kg	●	●
2.66 m³	1900 mm	2830 kg	●	▲

## HEAVY DUTY BUCKETS (QUICK COUPLED)

CAPACITY (ISO7451 HEAPED)	WIDTH	WEIGHT	ARM 2.53 m	ARM 3.38 m
1.04 m³	900 mm	1640 kg	○	○
1.35 m³	1100 mm	1810 kg	○	○
1.50 m³	1200 mm	1940 kg	○	○
1.75 m³	1350 mm	2070 kg	○	●
2.00 m³	1500 mm	2240 kg	●	▲
2.33 m³	1700 mm	2410 kg	●	■
2.50 m³	1800 mm	2500 kg	■	×
2.66 m³	1900 mm	2670 kg	■	×

### ROCK BUCKETS (QUICK COUPLED)

CAPACITY (ISO7451 HEAPED)	WIDTH	WEIGHT	ARM 2.53 m	ARM 3.38 m
1.04 m³	900 mm	1780 kg	○	○
1.35 m³	1100 mm	1950 kg	○	○
1.50 m³	1200 mm	2090 kg	○	○
1.75 m³	1350 mm	2220 kg	○	●
2.00 m³	1500 mm	2390 kg	●	▲
2.33 m³	1700 mm	2570 kg	▲	■
2.50 m³	1800 mm	2650 kg	■	×
2.66 m³	1900 mm	2830 kg	■	×

## HEAVY DUTY BUCKETS (QUICK COUPLED)

CAPACITY (ISO7451 HEAPED)	WIDTH	WEIGHT	ARM 2.53 m	ARM 3.38 m
1.04 m³	900 mm	1640 kg	○	○
1.35 m³	1100 mm	1810 kg	○	○
1.50 m³	1200 mm	1940 kg	○	○
1.75 m³	1350 mm	2070 kg	○	○
2.00 m³	1500 mm	2240 kg	○	●
2.33 m³	1700 mm	2410 kg	●	▲
2.50 m³	1800 mm	2500 kg	●	■
2.66 m³	1900 mm	2670 kg	▲	■

### ROCK BUCKETS (QUICK COUPLED)

CAPACITY (ISO7451 HEAPED)	WIDTH	WEIGHT	ARM 2.53 m	ARM 3.38 m
1.04 m³	900 mm	1780 kg	○	○
1.35 m³	1100 mm	1950 kg	○	○
1.50 m³	1200 mm	2090 kg	○	○
1.75 m³	1350 mm	2220 kg	○	○
2.00 m³	1500 mm	2390 kg	○	●
2.33 m³	1700 mm	2570 kg	●	▲
2.50 m³	1800 mm	2650 kg	●	■
2.66 m³	1900 mm	2830 kg	■	×

\* The above loads (kg) are compliant to the ISO standards and refer to the excavator equipped without bucket. The indicated loads are no more than 87% of hydraulic system lift capacity or 75% of static tipping load. Values marked with an asterisk (\*) are limited by the hydraulic lifting capacity.

○ Rated material density up to 2 ton/m³ ● Rated material density up to 1.6 ton/m³ ▲ Rated material density up to 1.4 ton/m³  
■ Rated material density up to 1.2 ton/m³ × Not applicable

# CX D-SERIES

## CX500D ME

### ENGINE

Model	ISUZU VE-6UZ1X
Type	Water-cooled, 4-cycle diesel, 6-cylinder in line, High pressure common rail system (electric control). Turbocharger with air cooled intercooler, SCR system & DPD.
Emissions level	EU N°2016/1628 STAGE V
Number of cylinders/Displacement (l)	6 / 9.84
Bore and stroke (mm)	120 x 145
Rated flywheel horse power	
ISO 14396	270 kW / 362 hp at 2000 min <sup>-1</sup>
with fan-pump	245 kW / 328 hp at 2000 min <sup>-1</sup>
Maximum torque	
ISO 14396	1567 N-m at 1300 min <sup>-1</sup>

### HYDRAULIC SYSTEM

Main pumps	2 variable displacement axial piston pumps with regulating system
Max. oil flow (l/min)	2 x 364 at 2000 min <sup>-1</sup>
Working circuit pressure	
Boom/Arm/Bucket (MPa)	31.4
	34.3 with auto power up
Swing circuit (MPa)	29.4
Travel circuit (MPa)	34.3
Pilot pump	1 gear pump
Max. oil flow (l/min)	30
Working circuit pressure (MPa)	3.9
Boom Cylinders	
Bore (mm)	170
Stroke (mm)	1550
Arm Cylinders	
Bore (mm)	190
Stroke (mm)	1920
Bucket Cylinders	
Bore (mm)	170
Stroke (mm)	1335

### SWING

Swing Motor	Fixed displacement axial piston motor
Maximum swing speed (min <sup>-1</sup> )	6.6
Swing torque (kNm)	150

### FILTERS

Suction filter (µm)	105
Return filter (µm)	6
Pilot line filter (µm)	8

### ELECTRICAL SYSTEM

Voltage (V)	24
Alternator (Amp)	90
Starter (V/kW)	24/5.5
Battery	2 X 12 V - 128 Ah/5HR

### UNDERCARRIAGE

Travel motor	Variable displacement axial piston motor
Travel speeds	
High (km/h - automatic travel speed shifting)	5.3
Low (km/h)	3.2
Drawbar pull (kN)	339
	(Fixed sideframe undercarriage)

Number of carrier rollers	
Fixed sideframe undercarriage	2 (each side)
Retractable sideframe undercarriage	3 (each side)
Number of track rollers (each side)	9
Number of shoes (each side)	50

### SOUND LEVEL

External guaranteed sound level (EU Directive 2000/14/EC)	LwA 105 dB(A)
Operator cab sound pressure level (ISO 6396)	LpA 70 dB(A)

### CIRCUIT AND COMPONENT CAPACITIES


Fuel tank (l)	650
Hydraulic system (l)	460
Hydraulic tank (l)	230
Adblue tank (l)	152

### WEIGHT AND GROUND PRESSURE

(With 2.53 m arm, 3.0 m<sup>3</sup> bucket, 600 mm grouser shoes, operator, lubricant, coolant, full fuel tank and FOPS protection level 2.)

CX500D ME	FIXED SIDEFRAME UNDERCARRIAGE	RETRACTABLE SIDEFRAME UNDERCARRIAGE
Weight	49600 kg	51000 kg
Ground Pressure	0.085 MPa	0.087 MPa
Counterweight	10000 kg	10000 kg

# SPECIFICATIONS

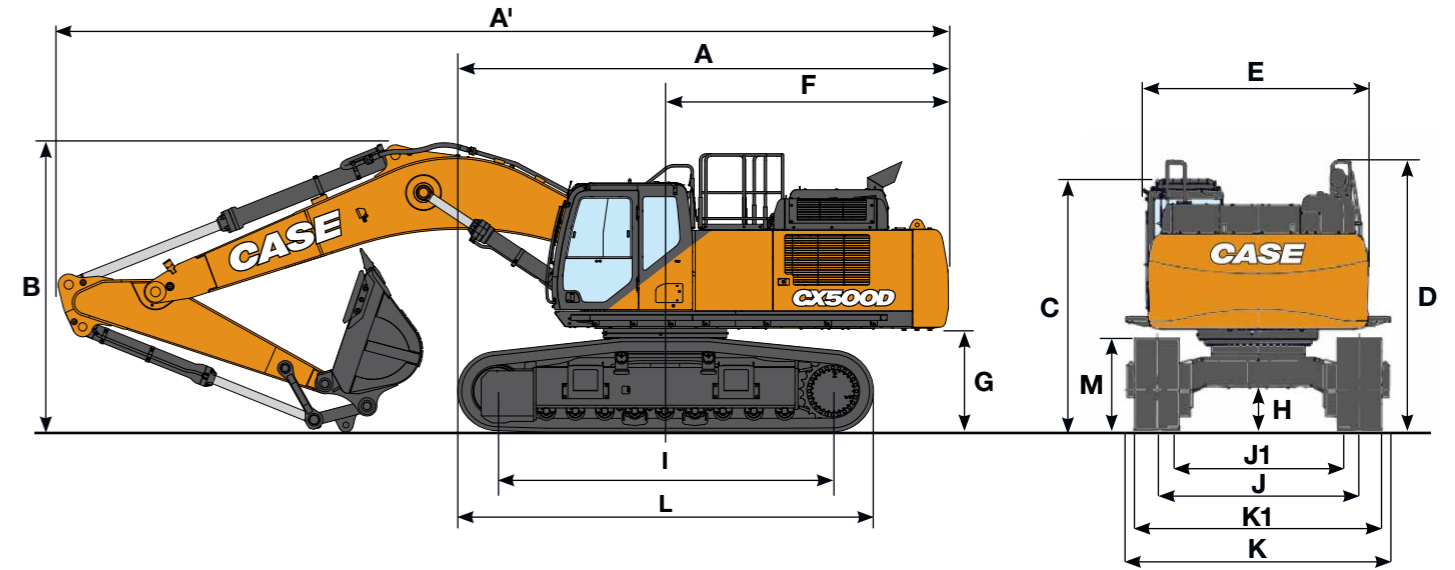

### GENERAL DIMENSIONS


		FIXED SIDEFRAME UNDERCARRIAGE	RETRACTABLE SIDEFRAME UNDERCARRIAGE
		Arm 2.50 m	Arm 2.50 m
A Overall length (without attachment)	mm	6450	6450
A' Overall length (with attachment)	mm	11680	11660
B Overall height (with attachment)	mm	3800	3840
C Cab height	mm	3400	3550
D Overall height (to top of guardrail)	mm	3550	3700
E Upper structure overall width (without catwalks)	mm	3060	3060
Upper structure overall width (with catwalks)	mm	3590	3590
F Swing (rear end) radius	mm	3730	3730
G Clearance height under upper structure	mm	1330	1480
H Minimum ground clearance	mm	535	720
I Wheel base (center to center of wheels)	mm	4400	4400
L Crawler overall length	mm	5450	5450
M Crawler tracks height	mm	1240	1220
J Track gauge (extended)	mm	2750	2890
J1 Track gauge (retracted)	mm	-	2390
K Undercarriage overall width (extended with 600 mm shoes)	mm	3350	3490
K1 Undercarriage overall width (retracted with 600 mm shoes)	mm	-	2990

### PERFORMANCE DATA

		FIXED SIDEFRAME UNDERCARRIAGE	RETRACTABLE SIDEFRAME UNDERCARRIAGE
		Arm 2.50 m	Arm 2.50 m
Boom length	mm	6550	6550
Bucket radius	mm	1840	1840
Bucket wrist action	°	160	160
A Maximum reach at GRP	mm	10550	10520
B Maximum reach	mm	10800	10800
C Max. digging depth	mm	6490	6340
D Max. digging height	mm	10550	10700
E Max. dumping height	mm	7160	7310

### DIGGING FORCE (ISO 6015)

Arm 2.50 m		
Arm digging force	kN	245
with Auto power boost	kN	267
Bucket digging force	kN	287
with Auto power boost	kN	313

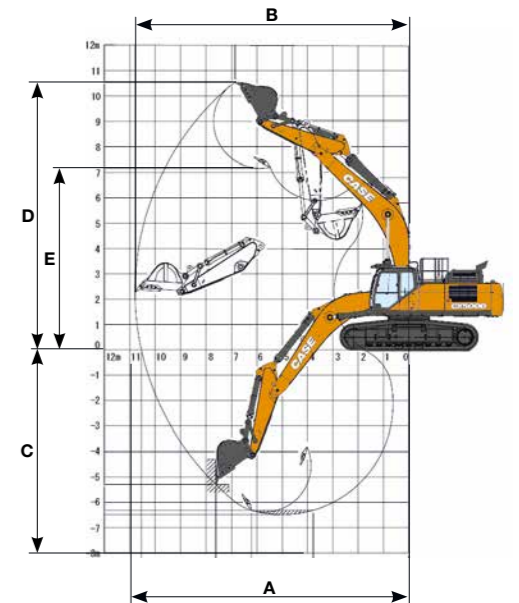

# LIFTING CAPACITY

## CX500D ME

Front Side	REACH				m
	4.0 m	6.0 m	8.0 m	At max reach	

LC - 2.50 m length, 600 mm shoes. Max reach 8.96 m

8.0 m	6.0 m	4.0 m	2.0 m	0 m	-2.0 m	-4.0 m			
							13450*	13450*	6.86
	14610*	14610*	12740*	10650	12690*	10330	8.14		
	16760*	15730	13240*	10310	12460*	8920	8.79		
	18590*	14730	13880*	9900	12430*	8450	8.95		
	18800*	14250	13780*	9650	12410*	8720	8.65		
23000*	23000*	16970*	14250		12100*	10000	7.84		
16220*	16220*	11620*	11620*		10540*	10540*	6.31		

Front Side	REACH				m
	4.0 m	6.0 m	8.0 m	At max reach	

RTC - 2.50 m length, 600 mm shoes. Max reach 8.96 m

8.0 m	6.0 m	4.0 m	2.0 m	0 m	-2.0 m	-4.0 m			
							13450*	12930	6.86
	14610*	14610*	12740*	9920	12690*	9630	8.14		
	16760*	14610	13240*	9590	12460*	8290	8.79		
	18590*	13620	13880*	9180	12430*	7840	8.95		
	18800*	13150	13780*	8940	12410*	8080	8.65		
23000*	23000*	16970*	13150		12100*	9270	7.84		
16220*	16220*	11620*	11620*		10540*	10540*	6.31		

### CX500D LC

#### ROCK BUCKETS (DIRECT FIT)

CAPACITY (ISO7451 HEAPED)	WIDTH	WEIGHT	ARM 2.53 m
1.75 m <sup>3</sup>	1350 mm	2270 kg	○
2.00 m <sup>3</sup>	1500 mm	2380 kg	○
2.33 m <sup>3</sup>	1700 mm	2500 kg	○
2.50 m <sup>3</sup>	1800 mm	2640 kg	◎
2.78 m <sup>3</sup>	2000 mm	2900 kg	●

#### XTREME ROCK BUCKETS (DIRECT FIT)

CAPACITY (ISO7451 HEAPED)	WIDTH	WEIGHT	ARM 2.53 m
1.75 m <sup>3</sup>	1350 mm	2450 kg	○
2.00 m <sup>3</sup>	1500 mm	2570 kg	○
2.33 m <sup>3</sup>	1700 mm	2700 kg	○
2.50 m <sup>3</sup>	1800 mm	2850 kg	◎
2.78 m <sup>3</sup>	2000 mm	3150 kg	●

### CX500D RTC

#### ROCK BUCKETS (DIRECT FIT)


CAPACITY (ISO7451 HEAPED)	WIDTH	WEIGHT	ARM 2.53 m
1.75 m <sup>3</sup>	1350 mm	2270 kg	○
2.00 m <sup>3</sup>	1500 mm	2380 kg	○
2.33 m <sup>3</sup>	1700 mm	2500 kg	○
2.50 m <sup>3</sup>	1800 mm	2640 kg	○
2.78 m <sup>3</sup>	2000 mm	2900 kg	◎

#### XTREME ROCK BUCKETS (DIRECT FIT)

CAPACITY (ISO7451 HEAPED)	WIDTH	WEIGHT	ARM 2.53 m
1.75 m <sup>3</sup>	1350 mm	2450 kg	○
2.00 m <sup>3</sup>	1500 mm	2570 kg	○
2.33 m <sup>3</sup>	1700 mm	2700 kg	○
2.50 m <sup>3</sup>	1800 mm	2850 kg	○
2.78 m <sup>3</sup>	2000 mm	3150 kg	◎

○ Rated material density up to 2 ton/m<sup>3</sup> ◎ Rated material density up to 1.8 ton/m<sup>3</sup> ● Rated material density up to 1.6 ton/m<sup>3</sup>

\* The above loads (kg) are compliant to the ISO standards and refer to the excavator equipped without bucket. The indicated loads are no more than 87% of hydraulic system lift capacity or 75% of static tipping load. Values marked with an asterisk (\*) are limited by the hydraulic lifting capacity.

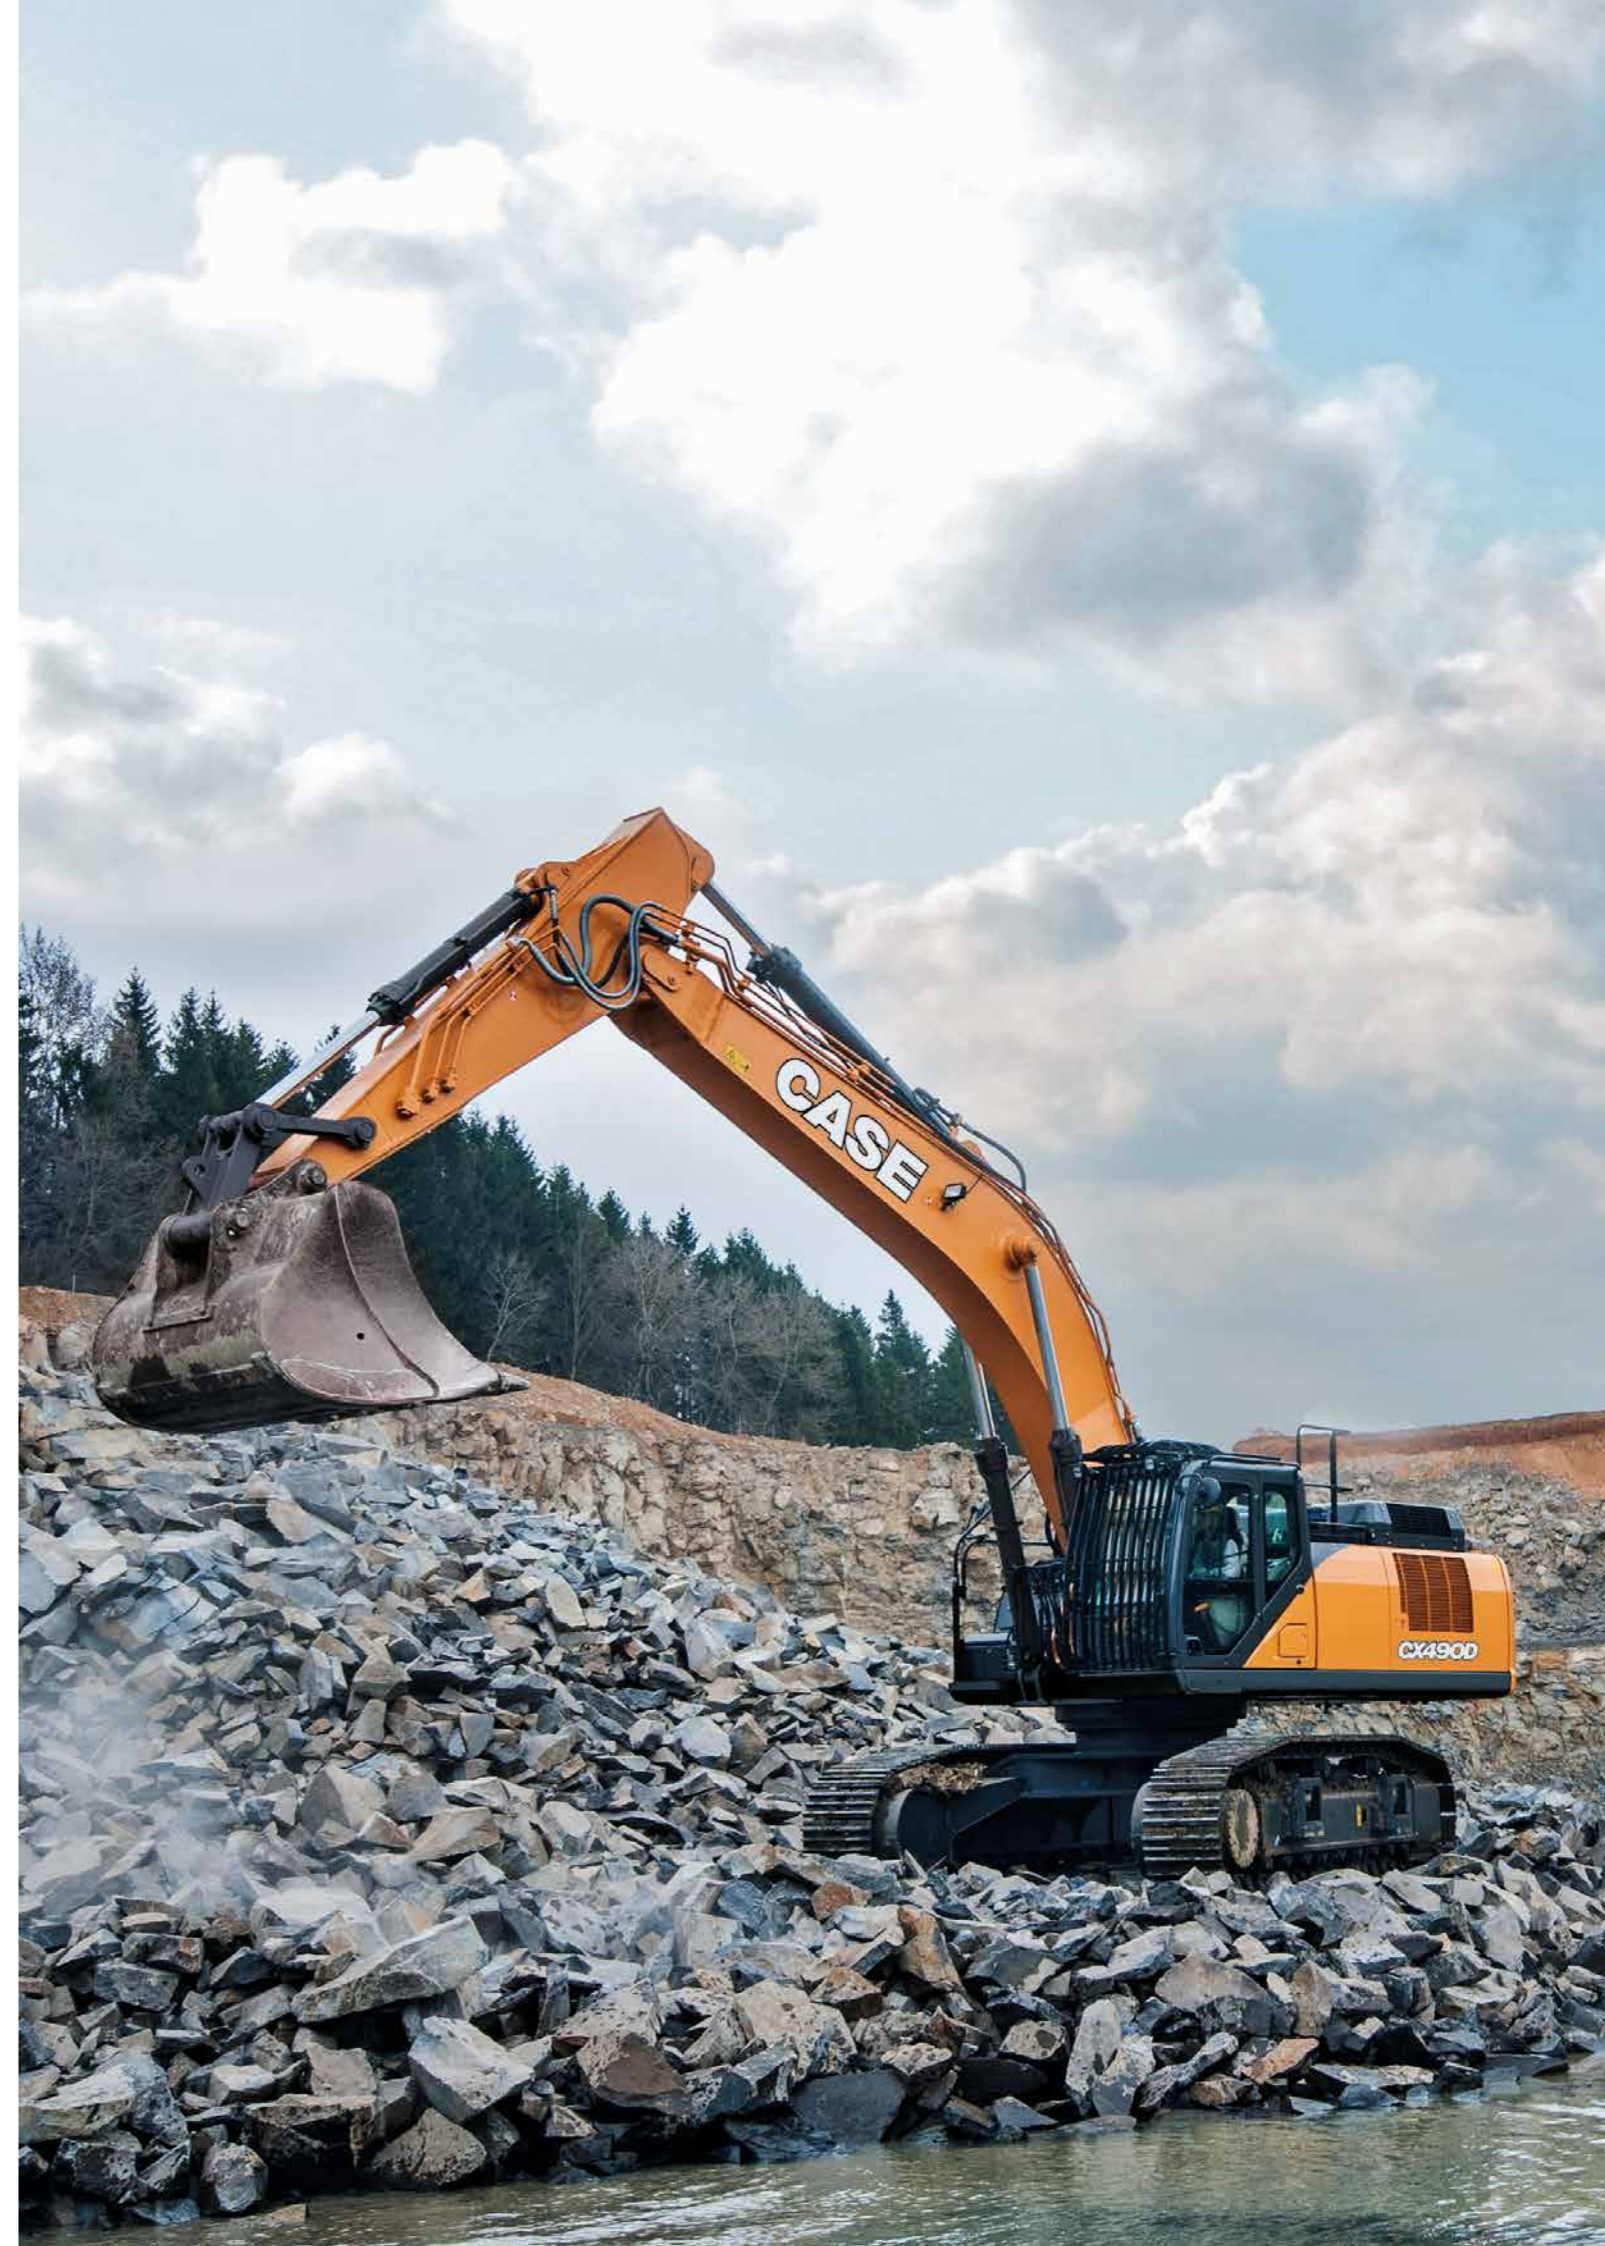

www.casece.com  
**EXPERTS FOR THE REAL WORLD**  
**SINCE 1842**

**CASE**  
CONSTRUCTION



Form No. 20137GB - MediaCross Firenze - 12/25

**CNH INDUSTRIAL  
DEUTSCHLAND GMBH**  
Case Baumaschinen  
Benzstr. 1-3 - D-74076 Heilbronn  
DEUTSCHLAND

**CNH INDUSTRIAL  
MAQUINARIA SPAIN, S.A.**  
Avenida Aragón 402  
28022 Madrid - ESPAÑA

**CNH INDUSTRIAL FRANCE, S.A.**  
16-18 Rue des Rochettes  
91150 Morigny-Champigny  
FRANCE

**CNH INDUSTRIAL ITALIA SPA**  
Lungo Stura Lazio 19  
10156, Torino  
ITALIA

**CASE CONSTRUCTION EQUIPMENT**  
Cranes Farm Rd  
Basildon - SS14 3AD  
UNITED KINGDOM

**NOTE:** Standard and optional fittings can vary according to the demands and specific regulations of each country. The illustrations may include optional rather than standard fittings - consult your Case dealer. Furthermore, CNH Industrial reserves the right to modify machine specifications without incurring any obligation relating to such changes.

Conforms to directive 2006/42/EC

**CASE**  
**00800-2273-7373**

The call is free from a land line.  
Check in advance with your Mobile Operator if you will be charged. Toll free number not available from all calling areas.

