

AXIAL-FLOW 160 SERIES

COMBINE HARVESTER
400 – 460 hp



THE AXIAL-FLOW RANGE

More than 45 years of quality threshing.

Reduce your grain loss with effective separation: the grain-on-grain threshing action of Axial-Flow® is unrivalled on the market and guarantees you low levels of grain damage. As leading manufacturers of single rotor combine harvesters, we provide farmers all over the world with exceptional quality and the latest technology when it comes to threshing and separation. Benefit from our technical expertise that is based on more than 45 years of experience.

GRAIN QUALITY

From feeding to cleaning and its grain-on-grain threshing, the entire system is designed to minimise grain damage.

VERSATILITY

Efficiently harvest more than 134 types of grains under diverse conditions while maintaining optimal capacity.

SIMPLICITY

Designed with fewer moving parts for unmatched reliability and easier serviceability resulting in low cost of harvesting.

TECHNOLOGY

The best of the automation system on the market with Case IH Harvest Command and its unique patented grain camera.



AXIAL-FLOW 160 SERIES

The most advanced combine in its segment. We have shaped a high performance combine in compact design with best-in-class threshing, simplicity and cost of ownership.

2 models from 400 to 460 hp



Grain tank size from 10,570 to 12,500 l



Unload rate of 113 l/s



Fixed or Cross-Flow self-levelling cleaning system



Unique integrated chopper (MagnaCut)



Case IH Harvest Command automation system



AXIAL-FLOW 260 SERIES

High-speed harvesting and threshing capability in any condition and delivery of high grain quality to meet the large modern farms and contracting businesses demands.

3 models from 498 to 634 hp



Grain tank size from 11,000 to 14,400 l



Unload rate from 141 to 159 l/s



Self-levelling cleaning system



Integrated chopper (MagnaCut) and X-tra chopping system



Reversible CVT rotor transmission



Case IH Harvest Command automation system

AXIAL-FLOW AF SERIES

A revolutionary combine aimed to address farmers' harvesting challenges by maximising capacity, efficiency and leading advanced connectivity.

2 models from 635 to 775 hp



Grain tank size from 16,000 to 20,000 l



Unload rate from 159 to 210 l/s



Cross-Flow Plus cleaning system



Integrated chopper (MagnaCut) and HighHoodMount chopper (MagnaChop)



Reversible CVT rotor transmission



Case IH Harvest Command automation system

THE BEST IN ITS CLASS

Building on its heritage of ease-of-use and grain quality, the 160 series is built to provide you with more technology, increased capacity, and better comfort. We have created a high-performance combine in a compact design with best-in-class threshing, simplicity and cost of ownership.

GRAIN QUALITY

Unrivalled single rotor with grain-on-grain threshing and centrifugal separation concept.

CAPACITY

The biggest grain tank capacity and up to 35 ft. headers for maximum throughput.

VERSATILITY

Proven Axial-Flow threshing concept with a 2-speed feeder option ready for all crops.

COMFORT

Big cab comfort in a compact combine, with automation at the push of a button.

EFFICIENCY

The lowest repair and maintenance costs combined with a unique services package.



FULLY AUTOMATED



THE MOST ADVANCED COMBINE IN ITS SEGMENT

The Axial-Flow 160 series brings next-level automation to Class 6 and Class 7 combines. With Case IH Harvest Command™ and the Pro 1200 interface, operators can easily monitor performance and intuitively adjust settings, while the combine automatically optimises key parameters as crop conditions change to maximise productivity, efficiency and ease throughout harvest.

HARVEST COMMAND AUTOMATION	06 – 07
HEADERS	08 – 09
FEEDING SYSTEM	10 – 11
THRESHING & SEPARATION	12 – 13
CLEANING SYSTEM	14 – 15
GRAIN TANK	16 – 19
CAB	20 – 21
RESIDUE MANAGEMENT	22 – 23
PERFORMANCE AND UPTIME	24 – 25
PRECISION TECHNOLOGY	26 – 29
SPECIFICATIONS	31

THE FUTURE OF HARVESTING

Harvest Command automation

SET-UP

YOUR HARVESTING STRATEGY

- **Performance:** Maximise grain savings and grain quality while optimising throughput.
- **Grain quality:** Maximise grain quality while saving grain and optimising throughput.
- **Max throughput:** Maximise throughput while automation adjusts combine settings to save grain.
- **Fixed throughput:** Fixed machine throughput to save grain and maintain a quality sample.

HARVEST

WITH INTELLIGENCE BUILT IN

- **Real-time automation:** Harvest Command continuously optimises combine settings as crop conditions change.
- **Automatic adjustment:** Fourteen sensors manage five machine settings to maximise productivity and grain quality while minimising losses.
- **Smart monitoring:** The grain camera and sieve pressure sensors help maintain grain quality while optimising ground speed and engine load.

Productivity and efficiency stay optimised with the right settings at all times.

13 SENSORS MONITORED

- A** Ground speed sensor
- B** Ground drive pressure sensor
- C** Flow/Yield sensor
- E** Sieve loss sensor
- F** Patented sieve pressure sensor
- G** Lower sieve position sensor
- H** Fan speed sensor

Not shown:


- Engine load sensor
- Rotor speed sensor
- Inclination sensor
- Rotor loss sensors
- Tailings volume sensor

FEEL

THE POWER OF AUTOMATION

Feedrate controls the crop processing load by controlling the ground speed. The machine will take over travel speed to maintain throughput, mirroring what an operator currently does as conditions change throughout a field.

Fewer functions to monitor, the fewer chances for error and less operator fatigue.

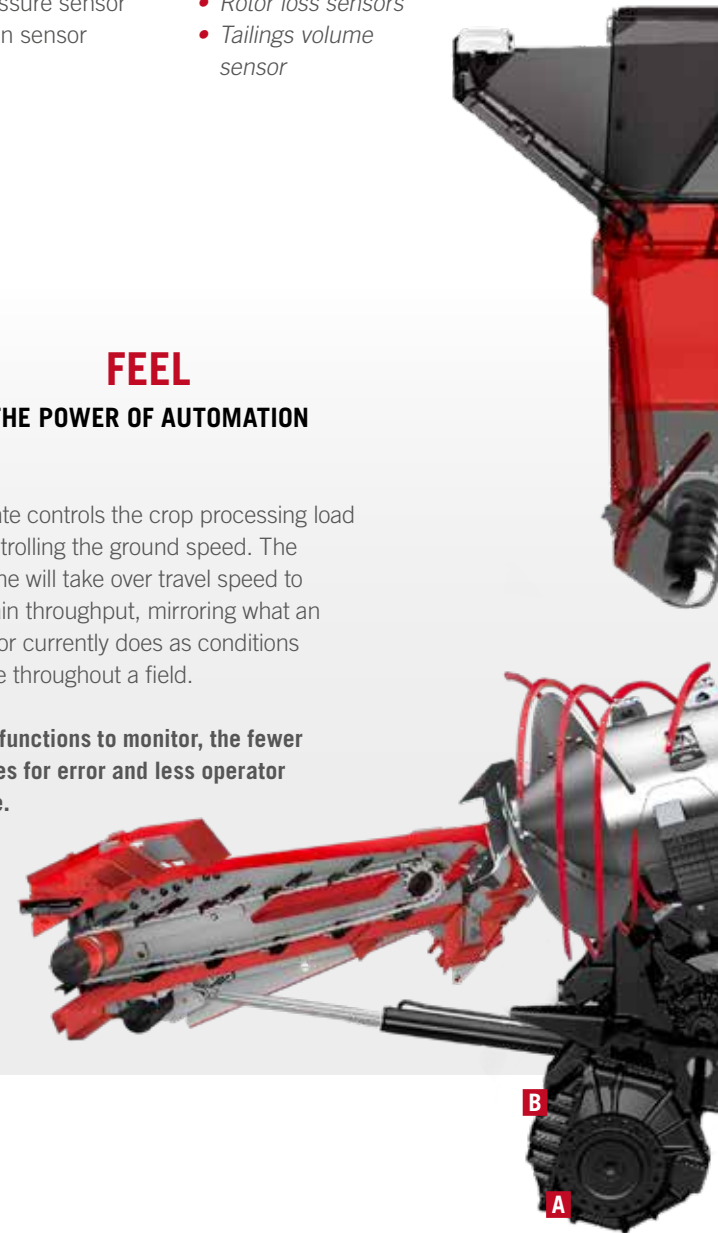

B

A

D PATENTED GRAIN CAMERA

Using visible and invisible multispectral light technology (infrared and ultraviolet spectrums), it evaluates real-time images of foreign matter in the grain sample, as well as detecting cracked grains or broken grains.

- 6 different UV light analyses: unique on the market
- Only 7.5 seconds to collect, analyse, inform and adjust combine settings



REPEAT

FROM ONE FIELD TO ANOTHER

Harvest Command allows you to move from one field to another without resetting the combine.

The system supports the following crops:


- corn
- soybeans
- canola
- barley
- wheat
- rice

IMPROVE

YOUR REVENUE OPPORTUNITIES

Experienced operators can further enhance their output and grain quality, while less experienced operators can more quickly achieve productivity comparable with experienced operators.

The system increases bargaining power thanks to the low damaged grain ratio and the reduced grain loss.

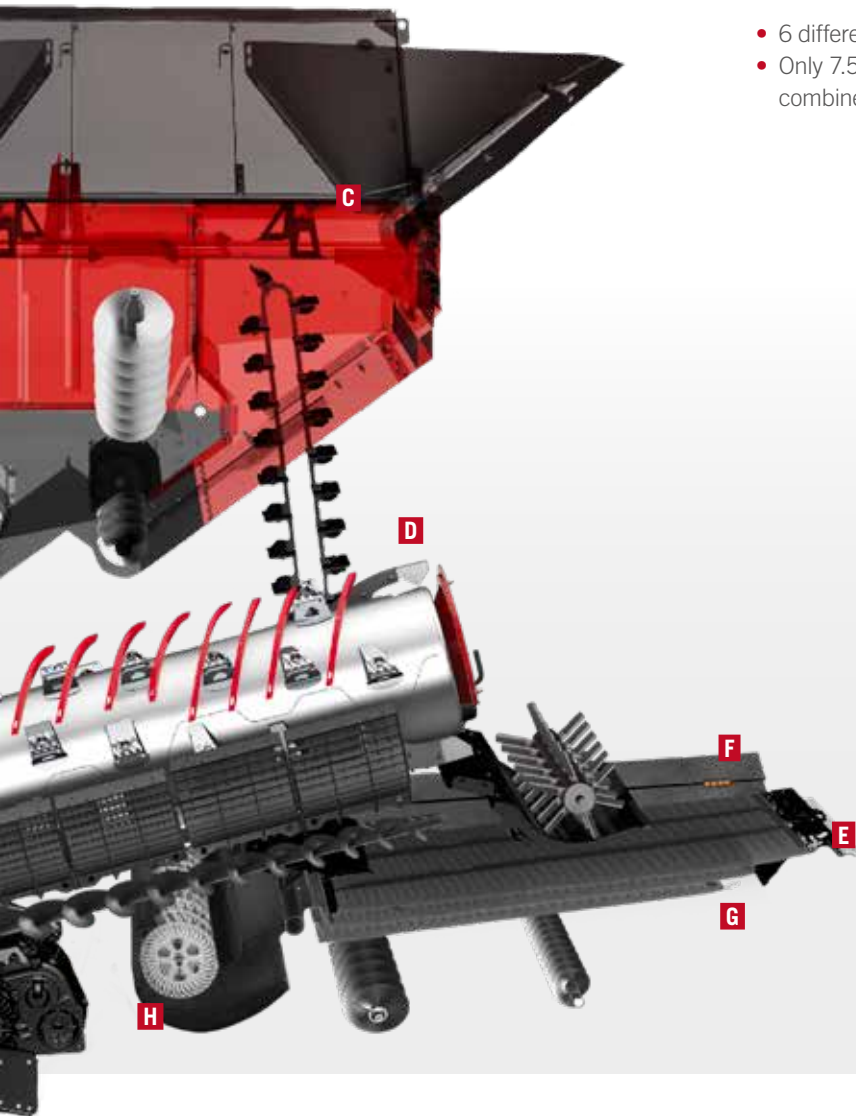



A SOLUTION FOR EVERY CROP

Designed to harvest over 134 types of grains in any condition



2030 GRAIN HEADER SIMPLY VERSATILE

- Working widths from 5.20 m to 9.1 m
- Robust design for challenging crops and conditions
- Heavy-duty components and simple maintenance for reliable performance
- Rice version available: working widths from 5.20 m to 7.30 m



3020 FLEX HEADER THE SOYBEAN SPECIALIST

- Working widths from 6.1 m to 9.1 m
- Flexible knife runs close to the ground to gather all low hanging pods
- Fully-adjustable suspension system, with the in-cab control option



G500V GRAIN HEADER THE SOLUTION FOR HIGH YIELDS

- Working widths from 6.1 m to 12.5 m
- Flexibility with up to 575 mm of fore aft knife adjustment and cutting knives for different crops
- Single PTO connection reducing the time to connect/disconnect
- New click on side knives design allowing quick installation and removal

CASE IH HEADER TRAILER

- 7 sizes available for 7.6 m / 8.5 m / 9.14 m / 10.7 m / 12.5 m / 13.7 m and 15.2 m
- V-type locking system provides faster and easier placing of the header on the trailer
- The knuckle steered wheels without turning axles ensure maximum stability and avoid tipping
- High manoeuvrability up to 40 kph* with the front and rear axles steering
- Equipped with a large lockable storage box and a spare wheel in option

* To comply with legislation and specification in your country



DRAPER HEADER BY MACDON

- Working widths from 7.6 m to 15.2 m
- Floating three-section flexible header and double and triple reel configurations allowing 70% more flexibility
- ContourMax™ Contour Wheels



4400 & C500 CORN HEADERS CLEAN COLLECTION, THOROUGH CHOPPING

- Six to sixteen row versions, rigid and folding (some models)
- Chopping option shreds and spreads straw between rows for erosion protection
- Low profile divider design saves valuable grain



3016 PICK UP GENTLY PICKS UP THE LARGEST WINDROWS

- Clean and gentle pick-up of large single or multi windrows
- Intact windrow enters combine – thanks to intermediate feed directing crop underneath auger
- Suits all types of crops



HIGH PERFORMANCE FEEDING

High output, smooth harvesting

The Axial-Flow feeding system is designed to enhance crop flow and improve feeding into the combine, resulting in smooth crop flow and reduced wear.


RUGGED FEEDER FOR MAXIMUM CAPACITY

Our advanced feeder housing is built to handle headers up to 10.7 m wide and weighing 4.7 t. Designed with a service-free hydraulic feeder drive belt tensioner, higher reliability lets you harvest with ease and confidence.

ONE FEEDER CONFIGURATION – READY FOR ANY CROP

Axial-Flow combines are designed to handle all main crop types with a single feeder configuration. The available 2-speed feeder drive, with or without stone trap, adapts feeder speed to harvesting conditions for smooth crop flow and consistent performance. High speed maximises throughput in dry crops and lighter yields, while low speed ensures controlled crop handling in high-moisture or heavy crop conditions.

Axial-Flow's exclusive spiral rollers actively engage stones, pushing them into the dedicated trap and so preventing foreign material from contaminating the rotor.

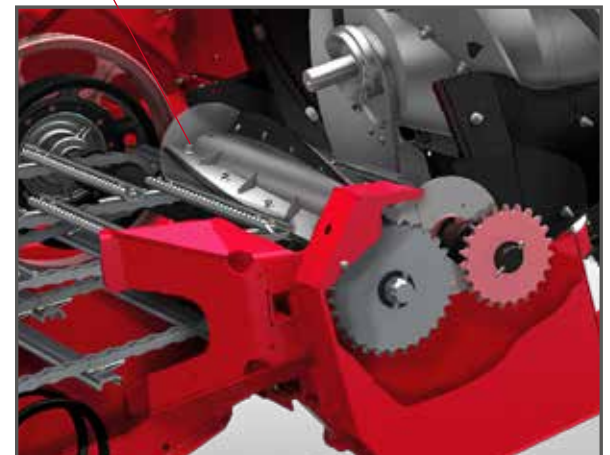



IN-CAB FORE-AND-AFT FEEDER ADJUSTMENT

No matter which header you're using or the crops and conditions you're working in, you can constantly optimise feeding to get a cleaner cut. Use this adjustment to hook up your header with ease from any type of trailer.

FOUR-CHAIN FEEDER

The feeder housing has been improved with a fourth chain to improve the feeding performance in high straw conditions and to ensure better reliability.



HIGH LIFTING PERFORMANCE

Both models are equipped with 85 mm lift cylinders to achieve maximum lifting capacity even with the widest grain or corn headers.



UNBEATABLE GRAIN QUALITY

Single rotor technology - the industry benchmark


The Axial-Flow threshing concept is the undisputed leader when it comes to gentle threshing, and produces an unbeatably low proportion of broken grain.

GRAIN-ON-GRAIN THRESHING CONCEPT

Our technology ensures that what goes into the grain tank is unbruised and unbroken, protecting top quality and adding revenue to your bottom line. There's no high-impact conventional drum like the one used in conventional or hybrid combines.

- Gentle but thorough threshing protects crop quality bonuses
- Top quality grain – unbruised and undamaged – strengthens your bargaining power when selling


AVERAGE CRACKED GRAIN CONTENT

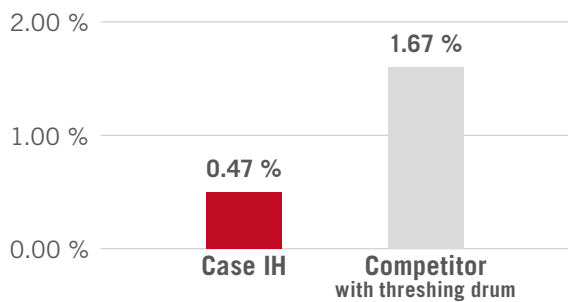

Source: Agricultural Chamber of Upper Austria

ROTOR SPEED ACTUATOR

4 times faster than the previous version to ensure high responsiveness as setting adjustments are instant, improving overall performance.

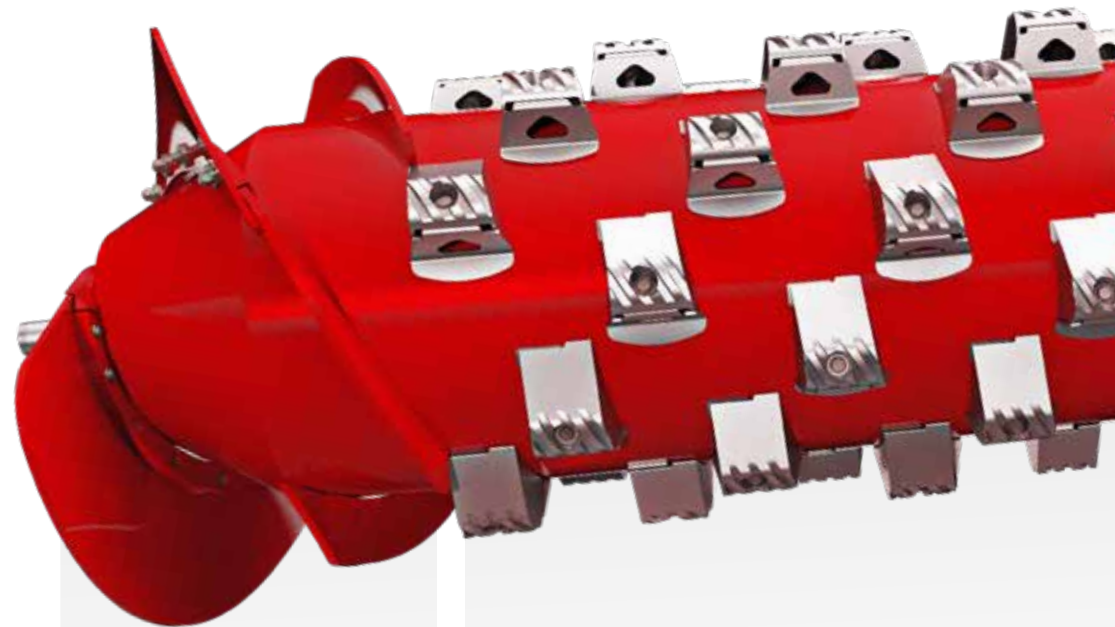

FEEDING AREA

THRESHING AND SEPARATION AREA

UNMATCHED CROP ADAPTABILITY

From one crop to another quickly and easily

When it comes to versatility, the Axial-Flow design remains the best to work in many crops without changing its threshing or cleaning configuration.

EASILY EXCHANGEABLE RASP BARS

The factory-fitted rasp bars are engineered to work in most crops and conditions. For specific crops like soya, rice or canola, they can be easily adapted.



**SEPARATION
AREA**

Small Wire
Small grain



Large Wire
Corn, soybeans
and rice



Round Bar
High moisture corn
and rice



Slotted
Edible beans
and sunflowers



MIX-AND-MATCH CONCAVES GUARANTEE PRODUCTIVITY

The light weight concaves can be easily changed in the field for just-in-time threshing customisation. The separation grates can also be exchanged, improving overall combine performance.

- Rotor compartment accessible from either side of the combine
- Light concave modules easy to handle for fast crop modification



A CLEANER CROP FOR A PREMIUM PRICE

The self-levelling cleaning system

It's not just the rotor that makes the Axial-Flow different: the cleaning system also stands out for its efficiency and convenience. It uses the proven chevron shaped Cross-Flow fan that generates a high volume of air for higher cleaning capacity.

- Fixed cleaning area: 5.52 m² total cleaning area
- Cross-Flow cleaning system: 5.4 m² total cleaning area
- Maintaining capacity with active hillside compensation on the upper sieve up to 12°
- Six-auger bed system for consistent feeding to cleaning system
- In-cab adjustable sieves


WEAR-RESISTANT AUGER BED

Specifically for abrasive crops like rice and soybean, extending operating life and reducing your repairing costs.

HYDRAULIC CLEANING FAN

The hydraulic drive of the cleaning fan greatly improves its responsiveness when adjustments are needed compared to a belt drive. Performance is guaranteed in any condition, especially on longitudinal slope variations.

ELECTRIC ACTUATOR TO COMPENSATE FOR SIDE-HILL SLOPE

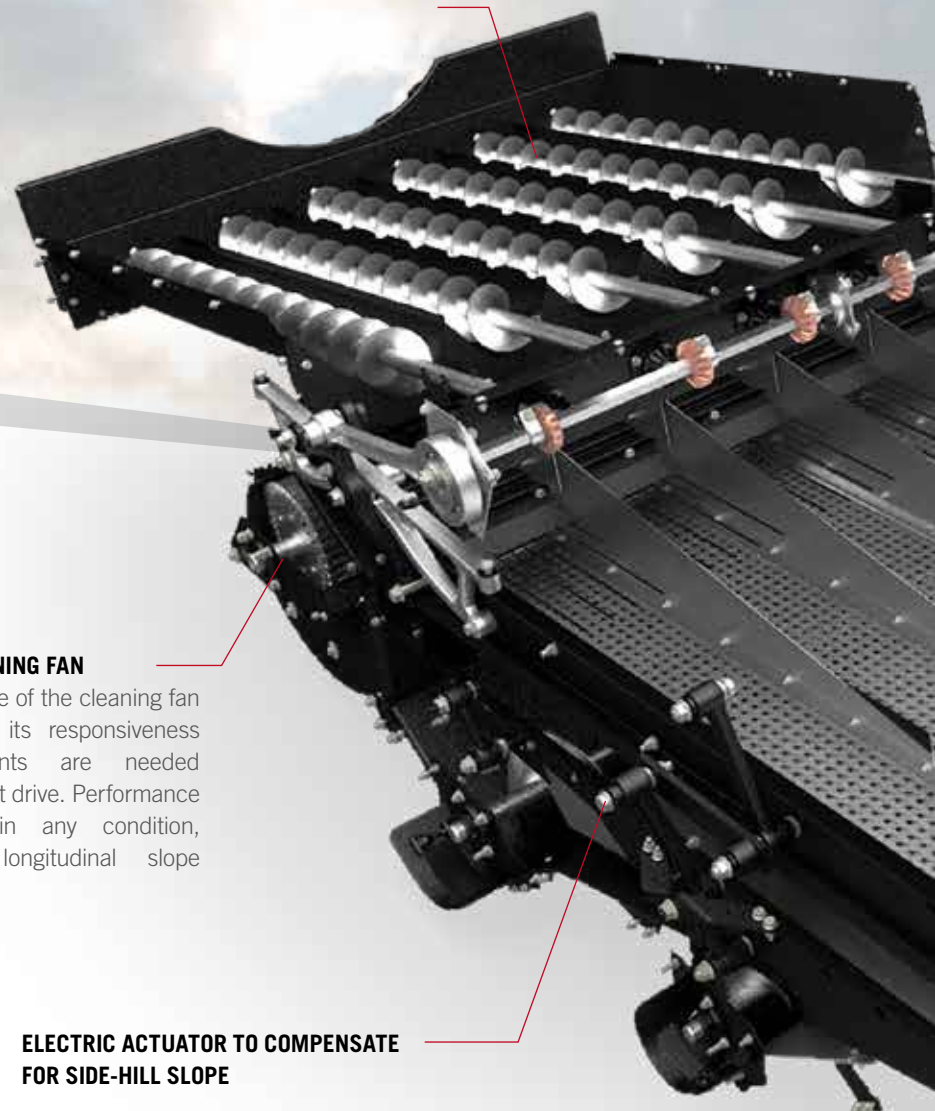


CROSS-FLOW CLEANING FUNCTION

Through sensors, the system detects hillside angle up to 12° and automatically compensates one-sided sieve overload. By providing side strokes on the upper sieve, it maintains capacity throughout the entire cleaning cycle.



Working hillsides without
Cross-Flow cleaning system

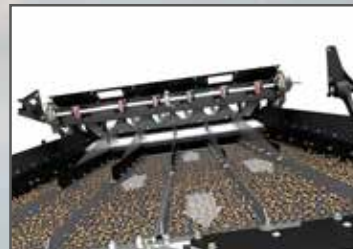

Working hillsides **with**
Cross-Flow cleaning system




PATENTED SIEVE PRESSURE SENSORS

The 2 sets of sieve pressure sensors will provide Harvest Command automation with sieve loading data. This load data will allow the system to understand the difference between sieve overload and blow-out losses.

AUTO FAN

The pressure sensors work together with the Auto Fan option to help prevent loss before it occurs by detecting load and inclination. The fan and sieves work in concert with each other adjusting to maintain an ideal operating setting and sieve pressure as conditions change.

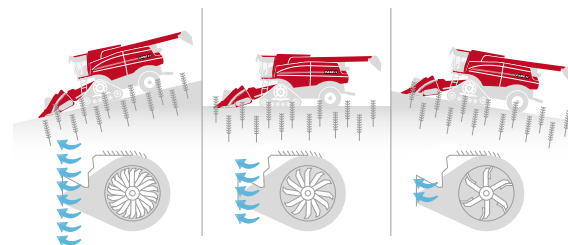

THE BIGGEST GRAIN TANK OF ITS CATEGORY

Best-in-class
autonomy

The Axial-Flow 160 series model has a grain tank large enough to allow the opening up of large, high-yielding fields without the inconvenience of having to stop and unload.

GRAIN TANK CAPACITY

- **6160:** 10,570 l
- **7160:** 12,500 l

UNLOADING SPEED

- 113 l/sec

GRAIN TANK EXTENSION

The 7160 is equipped with the bigger grain tank of the segment with 12,500 l for higher field autonomy.

CROSS-AUGER SHUT OFF

This system allows the unloading tube to be fully emptied for cleaner unloading and reduced grain loss, especially during unloading on the go. Controlled directly from the multifunction handle, it also helps protect the drive system from overload.





EFFICIENT GRAIN HANDLING

The Axial-Flow 160 series is a testament to both capacity and efficiency. Delivering immense throughput and excelling in storage and speed, its high-capacity grain tank and rapid unloading extend unloading cycles for unparalleled harvest efficiency.

HIGH-CAPACITY ELEVATOR

- Designed for high-yielding crops such as corn
- High-capacity grain handling
- Grain tank capacity for longer unloading intervals

HIGH-SPEED UNLOADING

- 113 l/sec unloading rate
- Large-diameter auger
- Designed for efficient, high-speed unloading

RIGHT ON THE TARGET

- Top-pivoted, inclined unloading auger
- Clearance for high-wall trailers
- Upward-pivoting spout helps prevent grain dribble losses





THE PERFECT MIX OF COMFORT AND PRODUCTIVITY

Your home away from home

Step into the Axial-Flow cab and experience comfort, visibility and intuitive control. One of the quietest and most spacious cabs on the market, it features rubber cab mounts to reduce vibration, ergonomic controls within easy reach and the dual Pro 1200 touchscreen displays for clear visibility and seamless machine management.

DUAL PRO 1200 DISPLAYS

Introducing our 12" dual high-resolution displays with a multi-touch screen featuring an anti-fingerprint coating. Effortlessly pair them with your mobile phone via Bluetooth and enjoy optimal brightness with the ambient light sensor.

- Customisable run screens with seven nameable options on the main screen
- Personalised Precision Farming data information on the secondary screen (mapping, auto-steering functions...).
- Screenshot function and possibility to export thanks to the versatile USB port

INTUITIVE CONTROLS

Ergonomically integrated controls place all key functions at your fingertips, for intuitive operation of the header, unloading auger and core machine functions.

3 CAMERAS TO KEEP AN EYE ON YOUR TASKS

Up to three cameras can be factory-equipped for a perfect overview of your tasks. Through the dual Pro 1200 displays, you can supervise:

- the back of the combine (for headland manoeuvres and trailer attachment)
- the unloading tube
- the grain tank

REMOVABLE COOLING BOX

A large portable cooler is located under the instructor seat and can be easily removed for replenishment.

AUTOMATION FOR STRESS-FREE HARVESTING

In reducing manual operations from twelve to three, Harvest Command system considerably reduces driver strain during long harvesting days.





FIELDS READY FOR SEEDING

Efficient residue management

UNIQUE INTEGRATED CHOPPER

The integrated chopper reduces the amount of rotating parts and the straw management system complexity. It actively chops the straw without any additional straw beater, keeping the machine compact and manoeuvrable.

QUICK CHANGE FROM CHOPPING TO SWATHING

It only takes a few steps to change from chopping to swathing. The residue spreading system can be adjusted via an easy-to-reach button at the rear of the combine. A lever adjusts chopper speed and brings the counter knives into position. The chopper knives are retracted for swathing with a reduced chopper speed up to 800 rpm. This results in top straw quality for bedding or fodder.



**GENTLE AND EVEN SPREAD**

Two hydraulic spreaders guarantee even coverage with large volumes of straw. Electrically adjustable spreading fins can be adjusted from the comfort of your cab, to ensure total control over the quality and spread of the chopped straw. Three different gate settings can be saved and called up from the dual Pro 1200 displays, saving you time when moving to a new field.

MAINTENANCE MADE EASY

The spreaders swing out sideways for easy accessibility to the cleaning area.

POWERED REAR ROLLER

The optional powered rear extractor helps straw movement out of the machine body, especially in wet conditions or if the field is weedy. The roller also helps straw deposition, gently laying the material in a soft swath.

The roller is activated by a hydraulic motor which can be easily adjusted for any kind of straw or for different field conditions.



THE NEXT LEVEL OF PERFORMANCE

Designed to go beyond

Developed for the most demanding harvesting needs, the Axial-Flow 160 series has gone through continuous improvements to keep pace with the introduction of the Harvest Command automation system in performance and efficiency.

BUILT FOR THE MOST DEMANDING CONDITIONS

The powerful hydrostatic drive with 2-speed gearbox automatically delivers the optimum harvesting speed to maintain set harvesting parameters, even in muddy conditions and on steep slopes.


For added traction when you need it most, the optional powered rear axle offers two speed ranges and a differential lock, helping you keep harvesting in wet fields and on slippery ground.

LEADING POWER DENSITY

The compact FPT Cursor 9 engine, with 8.7 l displacement, features prompt engine response and is the most powerful of its class (up to 7% better than market average in the 9 l range).

PRODUCTIVITY GUARANTEED

The 6-cylinder architecture and EGR-free technology ensure optimal engine output with highly efficient combustion, resulting in effective performance and low cooling requirements.

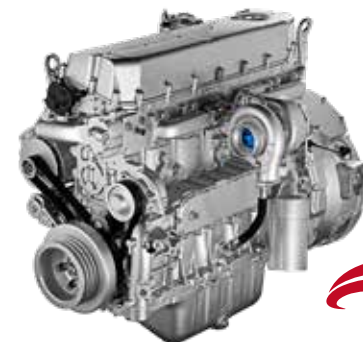



BEST-IN-CLASS UPTIME

The most cost-efficient combine

With a design that's centred around fewer moving parts than on any other combine, you can get going while others are still in the yard. Daily service points are simple to access while FPT Industrial's Stage V engine solution provides low running costs over lifecycle.

THE FEWEST MOVING PARTS ON THE MARKET

The Axial-Flow combine has the simplest driveline on the market with only 11 belts, 7 chains and a single rotor. The drives for the whole combine are powered from a central gearbox mounted directly to the engine. This ensures direct power transfer, enhanced reliability and much less maintenance work.

UP TO 20 % LONGER SERVICE INTERVALS VS. OTHER BRANDS

The proven FPT Cursor 9 engine is designed to save you time thanks to its market-leading 600-hour service intervals.

MAINTENANCE-FREE AFTER-TREATMENT SYSTEM

The patented HI-eSCR2 system eliminates the need for SCR component cleaning or filter replacement during the system's entire service life.

RELIABLE PERFORMANCE, LOW FUEL CONSUMPTION

The EGR-free architecture ensures optimal combustion efficiency – resulting in low fuel consumption and top-class performance.

FAST AND COST-EFFECTIVE ROUTINE MAINTENANCE

All inspection points are accessed from ground level, or a conveniently placed step. The small number of belts and chains permit convenient access to the driveline while easy access to the concaves and rotor allows quick servicing or repairs.

SAFE*GUARD* WARRANTY

PROTECTED FOR 3 YEARS

Extend your warranty for two more years: SAFEGUARD WARRANTY allows you to protect your investment from exposure to risk of unexpected repair cost. Harvest with peace of mind, keep operating cost under control and, at the same time, increase machine resale value.

**INCREASED
RESALE
VALUE**

OPERATOR *TRAINING*

KNOWLEDGE IS POWER

Unleash the full potential of your machine: Reach maximum performance and avoid an improper use of your new Case IH machine. Our professional training for operators delivered by your Case IH Dealer focuses on the new functionalities of your machine.

**INCREASE
OPERATOR
SAFETY AND
PERFORMANCE**

PRE-SEASON *CHECK*

PEACE OF MIND FOR 3 YEARS

The Case IH dealer technicians offer a Pre-Season Check to keep your machines in good shape and prevent downtime. The inspection covers over 100 checkpoints, and the technician will suggest ways to optimise machine performance based on the history report data.

**MAXIMISE
MACHINE USE,
PREVENT
DOWNTIME**

SAFE*GUARD*

PROTECT YOUR INVESTMENT,



CONNECT

ENHANCE YOUR PRODUCTIVITY

Increase uptime and keep your costs to an absolute minimum

This Case IH service package includes the professional services you need to help you reach the full potential of your Case IH machine.

**FASTER
REPAIR, LESS
DOWNTIME**

MAXSERVICE

3 YEARS OF ALL AROUND SUPPORT

Reduce downtime to a minimum: Get support around the clock in your busiest season and in close partnership with the dealer network. Take advantage of priority shipment of needed parts (24/7), in-field support by Case IH technicians and courtesy units wherever possible.

**INCREASED
PRODUCTIVITY
PER HA**

FieldOps

Use precision farming data and manage your fleet: FieldOps™ provides you with information about recent operations and lets you monitor machine status. Adapt in-field precision farming A/B guidance lines at any time so that all machines will follow the same lines every season.

**INCREASED
PRODUCTIVITY,
FASTER
REPAIR**

CONNECTROOM

CONNECT ROOM: YOUR PIT CREW

Connect Room continuously monitors machines, proactively identifies potential issues, and alerts dealers for quick help, maximising productivity and minimising downtime.

THE NEXT LEVEL OF PROFITABILITY

Case IH Precision Technology systems revolutionised precision farming in 1995, allowing farmers to monitor the entire crop production cycle.

With Precision Technology solutions, farmers can increase profits through repeatable accuracy, lower operating costs and reduced overlaps.

A PRECISION SOLUTION FOR EVERY NEED

Case IH offers a number of precision farming signals with varying levels of accuracy, so that you can choose what's best for your operation.

RTK⁺

- Pass-to-pass: 1.5 cm
- Repeatable: 1.5 cm

AFS1

- Pass-to-pass: 15 cm




TRADITIONAL SINGLE BASE RTK NETWORK

Degraded signal



CASE IH RTK⁺ NETWORK

RTK⁺ (Real Time Kinematic) is the top-end technology that ensures a fast, dependable signal and maximum accuracy in all conditions, regardless of field location.

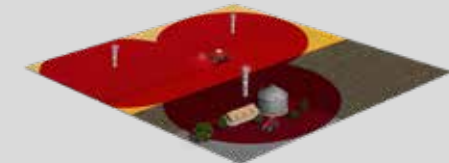

PRECISE AND REPEATABLE AUTOMATED STEERING

AccuGuide maximises your productivity and efficiency across your operation. In using controlled-traffic patterns, you minimise field compaction and further improve your agronomic performance.

- Higher concentration on optimising the performance of a combine
- Unload on-the-go and concentrate fully on the trailer
- Faster headland turns by taking every second or third pass



CONNECT MULTIPLE MACHINES IN A FIELD

With **Case IH AccuSync**, you can ensure operators are working together efficiently by sharing coverage maps and A/B guidance lines for all seasons of use. The system allows you to connect up to 6 combines, with data sharing compatibility between Case IH Pro 700 Plus and Pro 1200 displays.

- Enable section control based on operation coverage at the field level
- Gather more accurate data on tillage, planting, seeding, nutrient application, spraying and harvest
- Ensure parallel passes by all equipment
- Provide accurate yield maps where less-than-full swath is used
- Avoid skips and control overlaps



HANDS-FREE ASSISTED STEERING

Case IH RowGuide provides accurate, hands-free assisted steering during corn harvest to reduce operator fatigue through long hours of operation. Two mechanical touch sensors, mounted on the corn-header dividers, sense row position.

The Row Guidance system can also be linked to the GPS positioning system, AccuGuide, which can distinguish between cut and uncut rows, to facilitate night-time harvesting and advanced harvesting activities such as skip row functionality.



CONNECT. VIEW. MANAGE.



The all-in-one FieldOps simplified platform for all your Case IH and multi-branded equipment.

Get access to real-time data and insights, including real-time monitoring, precise equipment location and duty status, estimated job completion time, and more.

Create a free account to access all features of Case IH FieldOps!




REAL-TIME MACHINE MONITORING

- Get precise equipment location and duty status.
- Monitor task completion and view 24-hour machine history.
- For a specific job, the robust performance data from FieldOps tells you how much area in the field is left and gives you an estimated time to completion.




MACHINE PERFORMANCE TRACKING

- Improve your fleet's efficiency from anywhere.
- Monitor every detail of your fleet to make real-time decisions.
- Build your setup with your choice of over 50 real-time parameters, including:
 - telematics,
 - work status,
 - fuel and DEF consumption,
 - engine hours and more...

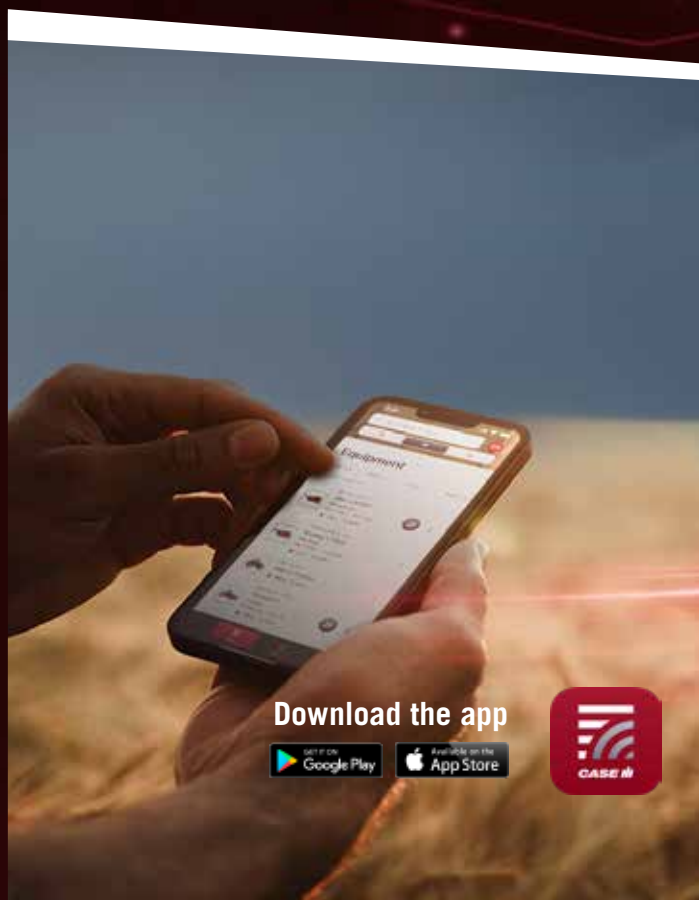

Download the app



DATA VISUALISATION

- Quickly view the activities for a given field and choose which data layers to visualise.
- Turn agronomic data layers into prescriptions, run agronomic reports and create manual agronomic data layers.
- Set up data integration between Case IH equipment and third-party systems which streamlines data collection and analysis, providing a holistic view of your farm operations.
- Easily find what you're looking for by toggling between tabs or using powerful search and quick filters.



SUPPORT & SERVICE REMOTELY

VIEW IN-CAB DISPLAY REMOTELY

No matter where they are, a farm manager or dealer can easily see exactly what the operator is seeing on the screen in the cab.



REMOTE SERVICE SUPPORT

Work with your local Case IH dealer to remotely diagnose maintenance and service issues and identify the parts you need to stay up and running.



Launch a remote display session from your mobile phone and view monitor's screen to provide guidance to operators and offer near real-time adjustments from anywhere.



PARTS AND SERVICES

Solutions for your farming

Our professional dealer network backed up by local Case IH teams, industry-leading Case IH support tools, modern training methods, best-in-class replacement parts, support and logistics performance. All you need for an excellent all-encompassing after-sales service to keep you farming.

GENUINE **PARTS** THE IDEAL CHOICE

Our wide range of top quality genuine parts can help maintain the full potential of your machine, season after season, guaranteeing top performance, utmost productivity and high residual value.

REMAN **PARTS** REMANUFACTURED

Cutting-edge technology and strict quality testing enable us to rebuild essential machine components to new-part standards.

ACCESSORIES **LINE** BUSINESS SOLUTIONS

Our engineers also develop solutions to cover every one of your individual demands, packaged into kits and designed to help improve business efficiency. Your Case IH dealer offers a host of partner-branded tools, small parts and accessories provided by selected partner suppliers.



CNH | CAPITAL

OPTIMAL FINANCING SOLUTION FOR EVERY INVESTMENT

CNH Capital is the financing company for Case IH. Our employees are financial experts and have many years of experience in agriculture. We not only know about Case IH products and the market – we also understand the individual requirements of your operations.

Therefore we are always able to offer you a financial solution for your new investments that is tailored specifically to your operational requirements. Our most important goal is improving the profitability of your investments!

MODELS	AXIAL-FLOW 6160	AXIAL-FLOW 7160
HEADERS		
Case IH fixed / variable knife headers (2030/3050 range), draper headers (3152 range), flex headers (3020 range) working widths [m]:	6.1 / 6.7 / 7.6 / 8.5 / 9.1 / 10.7	6.1 / 6.7 / 7.6 / 8.5 / 9.1 / 10.7
Corn header 4400 range rigid / foldable:	6 and 8 rows chopping and 12 rows corn headers	6 and 8 rows chopping and 12 rows corn headers
Pick-up headers 3016 range working width [m]:	3.7 / 4.6	3.7 / 4.6
THRESHING / SEPARATING		
Rotor drive type	Variable belt with 3-speed transmission	Variable belt with 3-speed transmission
Rotor speed range (rpm)	250 - 1,150 (3 ranges)	250 - 1,150 (3 ranges)
Rotor diameter and length [mm]	762 / 2,794	762 / 2,794
Total separation area [m ²]	2.78	2.78
Threshing / separating modules wrap angle (°)	156 / 133	156 / 133
Number of threshing / separation modules	6 / 3	6 / 3
CLEANING SYSTEM		
3 steps cleaning system / Cross-Flow Cleaning system (for hillside harvesting)	● / ○	● / ○
Total sieve area under wind control [m ²]	5.52 m ² fixed cleaning - 5.4 m ² Cross-flow cleaning	5.52 m ² fixed cleaning - 5.4 m ² Cross-Flow cleaning
CLEANING FAN		
Fan speed range (rpm)	450 to 1,250	450 to 1,250
RETURN SYSTEM		
Tailings return type	To rotor	To rotor
GRAIN TANK / UNLOADING		
In-cab control of grain tank covers	●	●
Grain tank capacity [l]	10,570	12,500
Unloading rate [l/s]	113	113
Unloading auger effective length, measured from middle of combine to tip of unloading auger [m]	6.6 / 7.4 / 7.8	6.6 / 7.4 / 7.8
STRAW CHOPPER & SPREADER		
Straw chopper / beater	Integral flail-type straw chopper	Integral flail-type straw chopper
Number of knives: chopper/counterbar	52 / 32	52 / 32
Spreader type	Dual horizontal spreaders and foldable windrow chute	Dual horizontal spreaders and foldable windrow chute
ENGINE		
Model and type / Capacity [cm ³] / Emission stage	FPT Cursor 9, 6-cylinder, turbo, aftercooler / 8,700 / Stage V	
Max. power ECE R120 ¹⁾ at 2,000 rpm (kW/hp(cv))	295 / 400	338 / 460
Fuel tank, diesel/urea [l]	950 / 166	950 / 166
TRACTION		
Transmission	Hi / Lo hydrostatic drive, 2 speed ranges in transmission	
Heavy duty adjustable steering axle	●	●
Final drive type	bull gear	bull gear
Powered rear axle	○	○
Feedrate control	○	○
PRECISION TECHNOLOGY		
Yield & moisture monitoring / mapping	○	○
Case IH Precision Technology ready and Guidance ready	○	○
Harvest Command automation	○	○
TYRES		
Traction tyres	800 / 65R32 L1172A8 R1W; IF800 / 65R32 L1178A8; 900 / 60R32 176A8 R1W	
Steering tyres	480/80 R26 160 A8; 600 / 65R28 154A8 R1W	
DIMENSIONS AND WEIGHTS		
A: Length [m]	8.7	
B: Width [m]	3.3 - 3.94	
C: Height [m]	4.0	
Weight [kg]	16,500	17,200

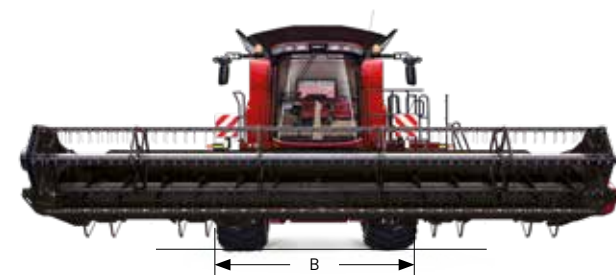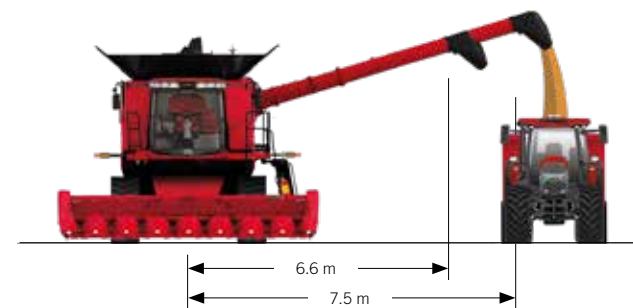



f y in @
caseih.com



Subscribe now
for exclusive
offers & updates



Free phone: 00 800 22 73 44 00

Safety never hurts! Always read the Operator's Manual before working with any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs, and use any safety features provided. This literature has been published for worldwide circulation. The standard and optional equipment and the availability of individual models may vary from one country to the next. Case IH reserves the right to undertake modifications without prior notice to the design and technical equipment at all times without this resulting in any obligation whatsoever to make such modifications to units already sold. Whilst every effort is made to ensure that the specifications, descriptions and illustrations in this brochure are correct at the time of going to press, these are also subject to change without prior notice. Illustrations may show optional equipment or may not show all standard equipment. Case IH recommends **AKCELA** lubricants.

Cod.No. CIH_26_Axial-Flow-160_Brochure_COM_01

CASE IH