

DuraVee™ And DuraVee™ Plus Trailing Rake Range

1270

1480

1690

1810

2011






DuraVee™ Standard Features

The DuraVee™ V-Rake is designed with a comprehensive range of standard features to maximise performance and ease of use:

- Extra heavy-duty construction, ideal for contractors, with a 2.5 m transport width
- Fast, precise row-width adjustment and accurate wheel-height control
- Non-greaseable, high-density polyethylene bushes (replaceable) with induction-hardened chrome pins on all joints and reel supports
- Hydraulic reel lift fitted as standard across all models
- Individually sprung reels for superior flotation on uneven terrain and reduced soil contamination
- 1.4 m diameter raking reels fitted to all models, each with 40 × 7 mm tines per wheel for efficient, consistent raking

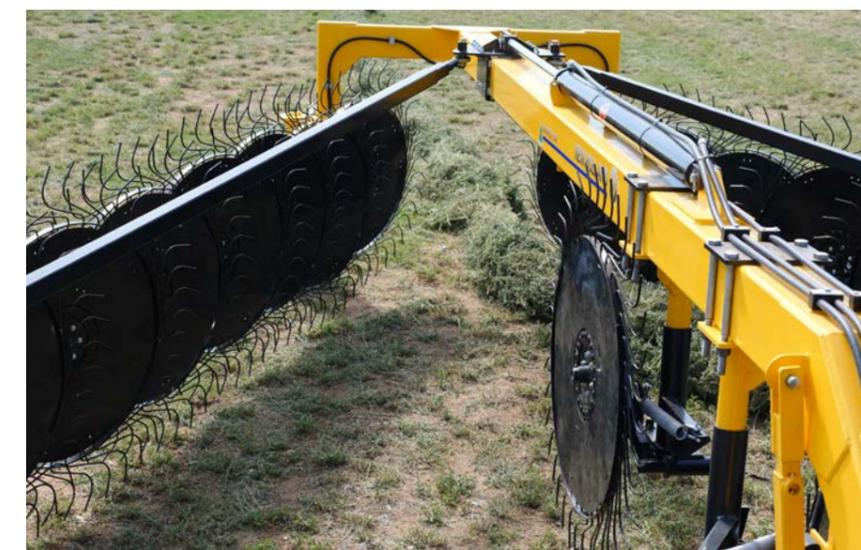

DuraVee™ Optional Features

Enhance the performance and versatility of your DuraVee™ V-Rake with a range of optional features designed to improve efficiency, control, and crop quality.

DuraVee™ - Heavy-Duty Performance You Can Rely On

The DuraVee™ and DuraVee™ Plus rakes are proudly 100% manufactured in Australia by K-Line Ag in Cowra, NSW, ensuring they are purpose-built for the demanding conditions faced by local farmers and contractors. Their Australian construction not only guarantees durability and reliability, but also supports local manufacturing, service, and parts availability, providing confidence that support is always close at hand.



Hydraulic Folding

- Raking width is hydraulically controlled from the tractor cab for effortless operation
- Single hydraulic cylinder adjusts from narrow transport width to full raking width
- Significantly reduces setup time with precise, on-the-go width control
- Safety bar included for secure transport



Splitter Kit

- Recommended when raking three rows into one, the splitter kit divides the centre row to either side before forming the final windrow, resulting in more uniform hay.
- Promotes faster, more even drying and smoother baler pickup
 - Simple adjustment with convenient transport setting
 - Full-size reel, matching the main rake reels
 - Two-reel manual lift



Reel Options

- Heavy-duty reel option featuring an 8 mm steel centre and poly tine supports to reduce wear and extend tine life

DuraVee™ Plus - Precision Raking for Premium-Quality Hay

DuraVee™ Plus is an advanced, heavy-duty, Australian-made V Rake designed specifically for quality-focused hay producers and exporters. Featuring flexible rubber tine reels, it delivers exceptional crop care while producing clean, uniform windrows.

This cost-effective rake minimises hay contamination, is gentle on leaves and stems, and preserves crop quality, helping you produce the highest-grade hay possible with confidence.



DuraVee™ Plus Standard Features

The DuraVee™ Plus incorporates a comprehensive range of standard features to ensure reliable performance and consistent results:

- Extra heavy-duty construction, contractor-ready, with 2.5 m transport width
- Row-width adjustment, precise reel-height control, and reel angle adjustment
- Fully shielded rubber flex tine reels for superior crop protection
- 1.5 m diameter raking reels fitted with 36 tines per wheel
- Material-driven operation only, eliminating soil contact and reducing contamination
- Non-greaseable, high-density polyethylene bushes (replaceable) with induction-hardened chrome pins on all joints and reel supports
- Hydraulic reel lift standard on all models
- The rubber flex tine reels feature a fully shielded, large-diameter design for gentle crop handling and reduced leaf loss. Bolt-on rubber flex tines allow for easy replacement, while integrated shielding helps minimise windblown hay and prevents crop wrap around the bearings. A heavy-duty welded reel structure strengthens and supports the tines, reducing breakage and ensuring long service life

DuraVee™ Plus Optional Features



Hydraulic Folding

Hydraulic folding allows the raking width to be easily adjusted from the tractor cab using a single hydraulic cylinder. This provides fast setup, precise on-the-go control from narrow transport width to full working width, and improved operational efficiency. A safety bar is included to ensure secure transport.

Splitter Kit

The splitter kit is recommended when raking three rows into one, splitting the centre row to either side before the final windrow is formed for more even hay. This improves drying consistency and baler pickup, while offering simple adjustment, convenient transport settings, and full-size DuraVee™ reels with a two-reel manual lift.



Models	DuraVee™ 1270	DuraVee™ 1480	DuraVee™ 1690	DuraVee™ 1810	DuraVee™ 2011	DuraVee™ Plus 1480	DuraVee™ Plus 1690	DuraVee™ Plus 1810
General Specifications								
Mounting Type	Rear Mounted Draw-Bar							
Operating Width (m)	7.4	8.2	9.2	10.1	11	8.2	9.2	10.1
Raked Windrow Width Maximum (m)	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
Number of Reels	12	14	16	18	20	14	16	18
Tines Per Reel	40	40	40	40	40	36	36	36
Reel Diameter (mm)	1400	1400	1400	1400	1400	1400	1400	1400
Flotation Type	Spring							
Hydraulic Remote Required Without Options	1 SA Remote							
Reel Lift	Hydraulic							
Hydraulic Fold	Optional							
Dimensions & Weights								
Transport Width (m)	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
Transport Length (m)	9.3	9.3	9.3	9.3	9.3	9.3	9.3	9.3
Transport Height (m)	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
Warranty								
	12 Months, Terms & Conditions Apply							

