



## OPERATING WEIGHT

|              |                     |
|--------------|---------------------|
| Narrow track | TBD                 |
| Wide track   | 5,291 lb (2 400 kg) |

## OVERALL DIMENSIONS

|                                   |                     |
|-----------------------------------|---------------------|
| Overall height                    | 57.9 in (1 472 mm)  |
| Overall length:<br>Without bucket | 100.1 in (2 542 mm) |
| Machine width:                    |                     |
| Narrow track                      | 47.6 in (1 209 mm)  |
| Wide track                        | 51.5 in (1 309 mm)  |
| Bucket width:                     |                     |
| Narrow track                      | 48.2 in (1 225 mm)  |
| Wide track                        | 51.8 in (1 340 mm)  |

## ENGINE

|                                                          |                                                |
|----------------------------------------------------------|------------------------------------------------|
| Model                                                    | Kubota D1803                                   |
| Emissions                                                | Tier 4 Final / Stage V Compliant               |
| Cylinders                                                | 3                                              |
| Displacement                                             | 111.4 in <sup>3</sup> (1 826 cm <sup>3</sup> ) |
| Fuel                                                     | Diesel                                         |
| Fuel injection: Electronic Fuel Injection<br>Common Rail |                                                |
| Engine speeds                                            | RPM                                            |
| Rated – full load                                        | 2,400                                          |
| Horsepower @ 2,300 RPM – SAE J1995:                      |                                                |
| Gross                                                    | 43.5 hp (31.9 kW)                              |
| Peak torque                                              | 110.6 ft-lb (150 Nm)                           |

## ELECTRICAL

|                |                          |
|----------------|--------------------------|
| System voltage | 12V                      |
| Alternator     | 70 amp                   |
| Battery        | 74 Ah                    |
|                | 668 CCA @ 0° F (-18° C°) |

## DRIVETRAIN

|                    |                |
|--------------------|----------------|
| Transmission type  | Hydrostatic    |
| Max. travel speed  | 5 mph (8 kph)  |
| Parking brake type | SAHR pin brake |

## LOADER PERFORMANCE SPECS


|                                              |                     |
|----------------------------------------------|---------------------|
| Lift geometry                                | Radial Lift         |
| Narrow rated operating capacity – ROC*:      |                     |
| 35% of tipping load                          | 1,600 lb (725 kg)   |
| 50% of tipping load                          | 2,280 lb (1 034 kg) |
| Narrow track tipping load*                   | 2,833 lb (1 285 kg) |
| Wide track Rated operating capacity – ROC*:  |                     |
| 35% of tipping load                          | 1,700 lb (771 kg)   |
| 50% of tipping load                          | 2,429 lb (1 102 kg) |
| Wide track tipping load*                     | 4,857 lb (2 203 kg) |
| NOTE: *Measured using standard equip bucket. |                     |

## HYDRAULICS

|                                          |                           |
|------------------------------------------|---------------------------|
| Type                                     | Tandem mounted fixed gear |
| Standard flow @ rated engine RPM:        |                           |
| @ 100% efficiency                        | 13.2 gpm (50 L/min)       |
| High flow                                | 21.1 gpm (80 L/min)       |
| Loader control valve:                    |                           |
| Type                                     | Open center               |
| Auxiliary hydraulics operating pressure: | 3,045 psi (210 bar)       |

## DIMENSIONS

|                                                          |                     |
|----------------------------------------------------------|---------------------|
| <b>A.</b> Overall height                                 | 57.9 in (1 472 mm)  |
| <b>B.</b> Rear departure angle                           | 23°                 |
| <b>C.</b> Ground clearance                               | 8.7 in (222 mm)     |
| <b>D.</b> Track length on ground                         | 50.6 in (1 285 mm)  |
| Overall length:                                          |                     |
| <b>E.</b> without bucket                                 | 100.1 in (2 542 mm) |
| <b>F.</b> with standard bucket                           | 129.2 in (3 180 mm) |
| <b>G.</b> Transport Length – no bucket, platform raised: | 96.5 in (2 452 mm)  |
| <b>H.</b> Reach at maximum dump                          | 19.8 in (503 mm)    |
| <b>I.</b> Dump angle                                     | 45°                 |
| <b>J.</b> Maximum rollback at full height                | 90°                 |
| <b>K.</b> Maximum rollback at ground                     | 28°                 |
| <b>L.</b> Dump height – standard bucket                  | 68.4 in (1 738 mm)  |
| <b>M.</b> Hinge pin height                               | 94.5 in (2 400 mm)  |
| <b>N.</b> Machine width:                                 |                     |
| Narrow track                                             | 47.6 in (1 209 mm)  |
| Wide track                                               | 51.5 in (1 309 mm)  |
| Clearance circle radius:                                 |                     |
| <b>O.</b> Rear                                           | 53.1 in (1 348 mm)  |
| <b>P.</b> No bucket                                      | 35.9 in (913 mm)    |
| <b>Q.</b> Standard bucket                                | 60.7 in (1 541 mm)  |
| <b>R.</b> Bucket width:                                  |                     |
| Narrow track                                             | 36.0 in (914 mm)    |
| Wide track                                               | 42.0 in (1 067 mm)  |

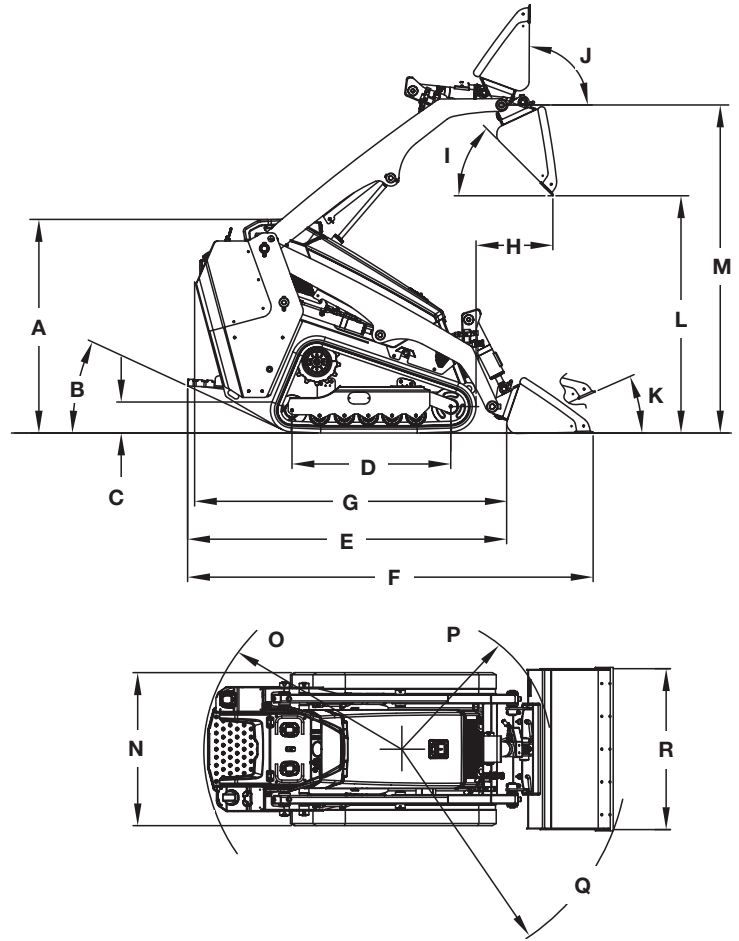

Line drawings are for illustrative purpose only and may not be exact representation of unit.

## TRACK SELECTION

| Type                           | Area                                       | Ground Pressure                    | Width to Outside Track |
|--------------------------------|--------------------------------------------|------------------------------------|------------------------|
| 9.8 in (250 mm) – Narrow track | 594 in <sup>2</sup> (0.38 m <sup>2</sup> ) | 5.9 psi (0.41 kg/cm <sup>2</sup> ) | 47.6 in (1 209 mm)     |
| 11.8 in (300 mm) – Wide track  | 825 in <sup>2</sup> (0.53 m <sup>2</sup> ) | 4.6 psi (0.32 kg/cm <sup>2</sup> ) | 51.5 in (1 309 mm)     |

## STANDARD EQUIPMENT

### OPERATOR ENVIRONMENT

Hydraulic pilot joystick control  
Loader and ground drive control lockout  
Cushioned operator platform  
Operator sensor with override function  
Operator grab handles  
Key start  
Hand throttle  
Cup holder  
Pocket for cellular phone  
Multifunction control panel

### ENGINE

Engine tip-over shut-off  
Glow plug starting aid  
Locking fuel cap  
Fuel filter with water separator  
Electric fuel pump  
Lock-able hood compartment

### DRIVETRAIN

Dual hydrostatic drive motors  
SAHR parking brake  
4 roller undercarriage  
Narrow rubber track belt

### HYDRAULICS

3-spool loader control valve  
1× dual acting auxiliary hydraulics  
Proportional auxiliary hydraulic control on joystick with bi-directional detent  
Electro hydraulic 1-way/2-way aux hydraulic selector  
Loader arm float

### TELEMATICS

MyCASEConstruction Telematics  
Includes hardware and 7-year data subscription

### LOADER

Radial lift geometry  
CII mechanical attachment coupler  
Loader lift arm support strut  
4× additional counterweight

### ELECTRICAL

12V power plug socket  
Front and rear LED work lights  
Master battery disconnect  
Horn

### WARRANTY

Base warranty coverage: 2-Year/2,000-Hour  
Full Machine Limited Warranty

## OPTIONAL EQUIPMENT

### DRIVETRAIN

Wide rubber track belt

### HYDRAULICS

Case drain attachment connection  
Bio-hydraulic oil and lubricants  
Ride control  
Bi-directional self-leveling  
High-flow auxiliary hydraulics

### LOADER

48 in Low-profile extended bucket  
52 in Low-profile extended bucket  
Bolt on bucket teeth  
Bolt on bucket cutting edge  
Bolt on side cutters  
6× additional counterweights  
SAE SSL attachment coupler - hydraulic  
CII attachment coupler - hydraulic

### ELECTRICAL

14-pin electrical auxiliary connection  
Loader mounted LED lights

### OTHER

English, Spanish or French operator manual

**CaseCE.com**

©2026 CNH Industrial America LLC. All rights reserved. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Capital is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Printed in U.S.A. Contains 10% post-consumer fiber.

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.



CASE Construction Equipment is biodiesel-friendly. NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.

Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.