





HERITAGE

A TRADITION OF INDUSTRY FIRSTS





1842

CASE is founded.

1869

The first CASE portable steam engine - road construction is born.

1957

The first factory-integrated loader/backhoe in the world: a CASE industry first.

1969

CASE begins skid steer loader production.

1977

CASE acquires Poclain, a French brand leader in the excavators market.

1992

Sumitomo becomes supplier to CASE Corporation distributing excavators ranging from 7 to 80 tons.

1998

Global Alliance signed between CASE Corporation and Sumitomo.

200-

CASE introduces the first of its CX excavators, powerful new "thinking machines" designed to enhance productivity through onboard intelligence features.

2007

CX210B is awarded the «Good Desing Award» by the design Academy of Japan.

2008

CX210B wins the 18th «Energy Conservation Award» from the Agency for Natural Resources and Energy of the Japanese Ministry of Economy.

2011

CASE becomes the first construction equipment manufacturer to offer both selective catalytic reduction and cooled exhaust gas recirculation as solutions to meet stringent emissions standards.

2015

CASE launches the new "D-Series" Tier 4 final / EU Stage IV Crawler Excavators.

2018

Stage V production for models CX350D and above, followed by Short Radius models.

2021

CASE introduces the first models of Stage V E-Series Crawler Excavators, featuring new FPT engine, new monitor, enhanced hydraulics and improved connected services.

CRAWLER EXCAVATORS

E-NHANCED GENERATION

ENHANCED QUALITY AND RELIABILITY

Stronger than ever, built to last

- + The reinforced clamp improves the pipe holding force on the boom.
- + The shape and thickness of the inner reinforcement plate thickness increases the boom's durability.
- + The tolerance of the boom and arm cylinder pins has been updated to reduce clatter and play within the bushing.
- + A new stop valve adjustment mechanism has been added for easier piping-valve connection.
- + The more compact assembly of the undercarriage recoil spring and grease cylinder facilitates clearing the mud.
- + The CX210E and CX250E feature a new, more efficient and durable travel motor, while the upgraded travel motor on the CX300E delivers higher drawbar pull.
- + The upper carrier rollers [on CX160E / CX180E / CX210E / CX250E] have been upgraded for greater durability.
- + The shoe bolt size [on CX300E] has been increased.

ENHANCED PRECISION AND CONTROLLABILITY

Smooth control, efficient operation - more than ever

The trademark **CASE Intelligent Hydraulic System (CIHS)** is now paired with new work modes and adjustable hydraulic settings to deliver smoother and more efficient operation than the previous generation.



E-SERIES

CRAWLER EXCAVATORS





ENHANCED VERSATILITY

A high degree of customization for every task

The new-concept work modes with independent throttle position offer a precise match to the requirements of every task:

- SP (Super Power) mode for maximum productivity (as in D-Series) with the throttle set at maximum power.
- P (Power) mode replaces H and A mode in D-Series, with throttle settings from 1 to 10.
- **E (Eco)** mode for maximum fuel economy, with throttle settings from 1 to 10.
- **L** (**Lifting**) mode is optimized for object handling with power boost permanently activated and overload warning system, and throttle settings from 1 to 6.

The choice of available work modes can be locked by the machine owner.

NEW The ground-breaking Eco mode reduces fuel consumption through selective control of engine and pump depending on the movement. It maintains maximum pump torque to deliver high productivity, while minimizing fuel consumption during low effort operations.



The balance of the hydraulic flows can also be customized to suit the operator's preferences:

- + "Arm In" vs "Boom Up"
- + "Arm In" vs "Swing" [only from CX210E upward]

The E-Series takes versatility even further by enabling the operator to select the type of work tool and input the customizable model number on the machine's monitor. When selecting the flow and pressure settings, they can also set the maximum overflow to protect the attachment.

A new, optional +500 kg **additional counterweight** is available on the CX210E LC to ensure perfect stability also with heavier quick couplers and attachments, further extending the machine's capacity to adapt to different work conditions.

The optional **Steelwrist** provision with advanced Quantum control system, additional monitor, new configurable joysticks and electrical connection up to arm top, facilitates a quick and easy aftermarket addition of Steelwrist tiltrotators to achieve maximum flexibility in a variety of jobsites.



PRODUCTIVITY

WORK SMART, PRODUCE MORE





ENHANCED EFFICIENCY

Top performance, high fuel economy

The new-generation E-Series combines the proven energy saving features of the D-Series with new work modes and hydraulic settings to raise the bar on efficiency.

The advanced automatic energy management system inherited from the D-Series consists of six key energy control functionalities:

- + Pump Torque Control: prevents drops in engine speed due to overtorque in high load operations while reducing fuel consumption in operations where maximum pump power is not required.
- + Boom Economy Control: increases fuel efficiency during boom down and swing movements.
- + Swing Relief Control: reduces the initial pump flow while improving control at the start of swing movements to lower fuel consumption.
- + Spool Stroke Control: automatically adjusts pressure based on the sensors' feedback, avoiding unnecessary functionality.
- + Boom Oil Regeneration: the returning oil from boom down is used to speed up the arm out movement [only from CX210E upward].
- + Auto Idle / Idle Shutdown: customizable and manually switchable functions that lower engine rpms after a period of inactivity or shut down the engine after a period of idling.

With all these features, coordinated by the CASE Intelligent Hydraulic System, together with the new FPT engine and improved travel motor for additional mechanical efficiency, the E-Series excavators deliver unprecedented performance and high fuel economy.



CLEANER POWER EU Stage V compliant engines




The new FPT NEF engines meet Stage V standards with the innovative HI-eSCR2 solution developed in-house, which only uses a Diesel Oxydation Catalyst and an integrated **maintenance-free** device on the SCR catalyst to achieve this dramatic reduction in emissions.

- + The SCR-on-Filter is "built-for-life" and requires no replacement or mechanical cleaning for its entire guaranteed emission regulation life.
- + The air intake flow is increased by a turbocharger with air-to-air cooling.
- + The multiple injection delivers best-in-class high torque performance at low rpms.
- + No EGR valve means 100% fresh air is used for combustion and no extra cooling system is required.

The new Stage V NEF engines can take their low-emission performance even further, as they can operate on **B7 biodiesel** and **HVO** (an even cleaner and more high-quality alternative to biodiesel, with superior performances in cold weathers) and other paraffinic fuels like **GTL** (Gas-to-Liquids), **CTL** (Coal-to-Liquids), **BTL** (Biomass-to-Liquids).

COMFORT RULES

FIRST-CLASS WORK ENVIRONMENT

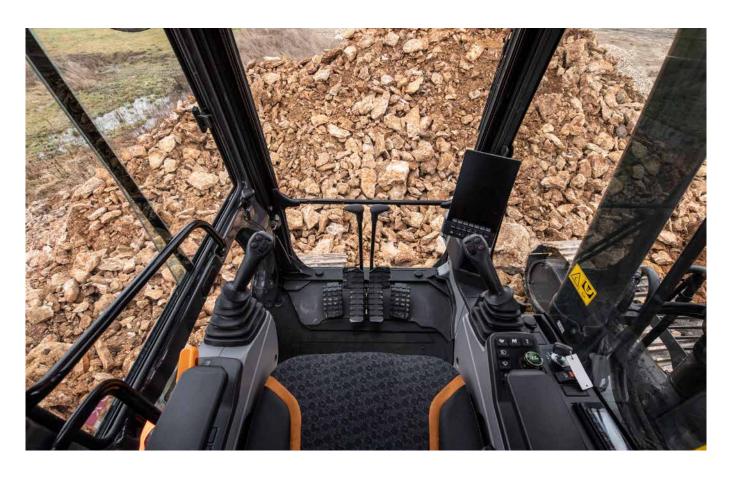

ENHANCED COMFORT Ideal working conditions, every day

- + Pressurized cab with improved sealing, wide access space and increased foot space.
- + Ergonomic air-suspended high-back seat with tilt adjustment and heater.
- + Console suspended with the seat and optimized control lever positions: the operator maintains their preferred working posture when adjusting the seat's position.
- + Reduced pedal travel and footrest reduce fatigue during operation.
- + Automatic air conditioning controls integrated in the monitor.
- + Air conditioning performance improved with a cooling upgrade and optimal air vents location.
- + Optimized storage capacity with lunch box tray and cool box, smartphone tray, and two large drink holders.
- + Repositioned lower track rollers reduce vibrations for smoother travelling.
- + Quieter cab with 1 dB lower internal noise compared to D-Series on CX210E, and 3 dB lower on CX250E / CX300E.





SAFETY AND MAINTENANCE

WORK SAFELY IN ALL CONDITIONS

SAFER OPERATION AND ACCESSIBILITY Safety first, inside and outside the cab


- + Reinforced cab structure ROPS and FOPS compliant.
- + Standard FOPS level 2 head protection.
- + Factory fitted front guard OPG level 1 and 2; grill guard available as DIA kit.
- + Factory fitted travel alarm for greater safety on the jobsite around the machine.
- + New auto lever lock safety feature immediately stops machine movement when the operator unintentionally unlocks the gate lock.
- + Seat belt fastened detection.
- + Wide, robust and comfortable steps, and handrail for safe access to the top of the hood.
- + Non-slip plates and top hood cover supported by two gas pistons and secured by two mechanical stops.
- + Wide platform on top of the engine compartment to work safely on the engine box.

SUPERIOR VISIBILITY Designed for outstanding visibility

Visibility – already outstanding in the D-Series - has been further enhanced:

- + Glazed surface with improved visibility on the right hand side.
- + Bigger monitor (from 7 to 10") with higher resolution, five configurable buttons and additional menus on the display.
- + Standard rear- and right-hand cameras, and an optional left-hand camera is available for the 270° CASE Maximum View Monitor with revised screen layout.
- + Upgraded cameras for better color balance.
- + Improved front window defrost.
- + New diffusion spray type window washer nozzle ensures better windshield cleaning.
- + LED lights package standard, plus optional Deluxe package at 3700 lumen and 4 extra front lights for even better performances (only Mono models).
- + "Follow me" lights function with selectable off timer.



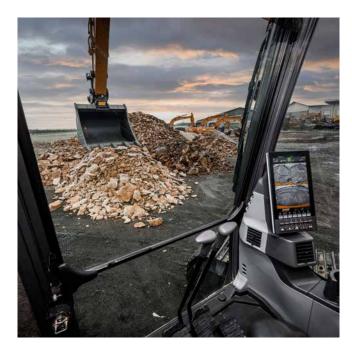

SAFETY AND MAINTENANCE

WORK SAFELY IN ALL CONDITIONS







EASY MAINTENANCE

"Grounded" and connected services solution

- + New extended service intervals for lower maintenance costs:
 - **Engine oil, fuel & oil filters** extended from 500 to 1,000 hours;
 - AdBlue supply module filter was 3,000 hours, it goes up to 4,000 hours;
 - **Travel gear oil** extended from 1,000 to 2,000 hours (on CX210E / CX250E).
- + Extended Maintenance System (EMS) bushings provide 1,000 hour greasing intervals on arm and boom pins and 250 hours on the attachment pin.
- + No EGR reduces complexity in the ATS.
- + SCR-on-Filter auto-cleaning device requires no replacement or mechanical cleaning during guaranteed life span.
- + Factory fitted automatic greasing system, including bucket linkage, to enhance uptime, serviceability and efficiency.

- + Fuel nozzle with integrated fuel tank float provides better visibility during refilling.
- + Hydraulic oil tank cap with integrated air breather for tool-less refill.
- + Newly added sampling valve in pump room for easier hydraulic oil sampling.
- + Increased washer tank capacity for fewer washer refills.
- + Grease cylinder compact design for easier mud cleaning around carrier rollers.
- + Two-piece split cab floor mat for simpler cleaning.
- Radiator shroud with larger opening from the side and additional opening below the upper structure for better accessibility (added opening only on CX210E / CX250E).
- + Air cleaner height change for easier put on and off.



- + A/C condenser tilt movement added to facilitate cleaning.
- + New reversible fan option (available for CX210E / CX250E).
- + Fan belt auto-tensioner requires no manual calibration.
- + Remote diagnostics and assistance, and interactive maintenance with the new bidirectional CASE SiteConnect module and enhanced SiteWatch telematics services.
- + The new aftermarket offering of CASE

 FLEETPRO rubber bolt-on pads, available
 on CX210E fitted with 600mm shoes, makes
 it easy and quick to switch between on- and
 off-road applications, extending the
 machine's versatility and improving the
 customer's profitability.
- + The CX210E benefits from a new aftermarket offering of dedicated service maintenance kits, helping the customers to further improve their TCO.







MAIN REASONS

TO CHOOSE THE NEW E-SERIES

BEST MATCH BETWEEN SPEED AND CONTROLLABILITY

CASE Intelligent Hydraulics System (CIHS) is synonymous and reference in the market for its fastest cycles times, best energy saving performance and smooth control.

ENHANCED QUALITY AND RELIABILITY

CASE excavators are known for their balanced design and first-class components. New improvements to arm, boom and undercarriage structure make them even better.

ENHANCED VERSATILITY

- + NEW 4 work modes (Super Power, Power, Eco, Lifting)
- + **NEW** 10 throttle settings, independent from work mode
- + NEW arm, boom and swing flow balance customization to suit every application
- NEW attachment types and names storable in the display for quicker tools management
- NEW optional heavier +500kg counterweight for CX210E LC to handle heavier attachments
- + NEW Steelwrist-ready tiltrotator provision

ENHANCED EFFICIENCY

- NEW Eco mode ensures the best selective engine and pump control, maximizing torque only when needed and saving more fuel
- + NEW FPT Stage V engine with no EGR, more efficient combustion
- + **NEW** upgraded travel motor for improved mechanical efficiency

ENHANCED CONNECTIVITY

- + NEW bidirectional CASE SiteConnect module
- + **NEW** interactive maintenance capabilities
- + NEW remote assistance
- + NEW standard CASE full telematics solution (modem, wiring, harnesses, antenna and 3-year advanced SiteWatch subscription)

SUPERIOR VISIBILITY

- + NEW 10" LCD monitor the biggest in the industry – with 5 configurable buttons and new menu functions
- NEW front window defrost and washing improvement
- + NEW greater visibility on the right hand side
- Optional CASE Maximum View Monitor for optimized all-around visibility



ENHANCED COMFORT

- + NEW console suspended with seat
- + **NEW** wide access space and increased foot space
- + NEW dedicated A/C controls in the monitor, always within easy reach
- + **NEW** improved air conditioning with new air vents
- NEW smoother travelling with repositioned rollers
- + NEW quieter environment in the cab



EASY MAINTENANCE

- + NEW extended 1,000-hour engine oil, fuel & oil filters change interval + 1,000-hour bushing greasing intervals for arm and boom pins
- + NEW SCR-on-Filter auto-cleaning device maintenance-free and built-for-life
- + NEW easy access to hydraulic tank thanks to cap with air breather
- + NEW split type floor mat
- + **NEW** optional reversible fan for improved radiator cleaning efficiency
- NEW FLEETPRO bolt-on rubber pads aftermarket offering for fast replacement and greater versatility
- + NEW service maintenance kits aftermarket offering for reduced TCO
- + NEW automatic greasing system

CLEANER POWER

- + NEW STAGE V engine by FPT, the European leader, known for its reliability and innovative tradition, with more than 25 years' experience
- + NEW High Efficiency SCR 2 system, covered by 13 patents
- + NEW EGR-free
- + NEW compatible with HVO and synthetic alternative fuels

SAFER OPERATION AND ACCESSIBILITY

- + ROPS cab with FOPS level 2
- + Standard extended handrails and guardrails
- + Factory fitted travel alarm
- + NEW auto lever lock safety feature





SITEWATCH: CENTRALISED FLEET CONTROL BENEFITS AT YOUR FINGERTIPS

Measure your true asset availability and optimise it

- + Eliminate the "phantom fleet": SiteWatch allows to identify spare units or under loaded machines on each site.
- + Become able to reallocate units where they are more needed.
- + Forward maintenance planning is easier since the actualised working hours are always available.
- + Extend the benefits of SiteWatch to the rest of your fleet: SiteWatch can be installed on the units of other brands as well.

Challenge your Total Cost of Ownership!

- + Being able to compare the fuel usage of different machine types will allow you choose the right equipment.
- + Save on transport costs with planned and grouped maintenance tasks.
- + Peace of mind, optimised uptime and lower repair costs: with preventive maintenance you can for example be alerted if the engine needs to be serviced and avoid disruptive breakdown.
- + Be able to compare your asset Return on Investment on different sites.
- + Your equipment is used only during working hours. You can set up alerts so that you know if it is in use during the weekend or at night.
- + Integrate with the programmed maintenance package, which ensures the required services are performed at the right time.

More safety, lower insurance premium

- + Keep thieves away: dissuade them from attacking your asset because it is geo-localised. SiteWatch is hidden so that thieves can't find it quickly.
- + Your fleet is used only where you decide. You can define a virtual fence and receive an email when a machine exits that perimeter.

CASE EXPERT SUPPORT

ALWAYS WITH YOU

SITECONNECT: PROACTIVE SUPPORT AND REMOTE ASSISTANCE

The SiteConnect module allows to establish a 2-way communication between your machine and your CASE Dealer. They will be able to run remote diagnostics and analyze the machine data before travelling to the unit.

Maximize your machine's uptime

- + Save time as your dealer conducts remote assistance to the operator. The machine can be anywhere while the dealer remotely connects with the machine to do diagnostics.
- + The dealer is supporting you with SiteConnect tools to maximize the uptime for your machine

Optimize service efficiency

- + By enabling your dealer to investigate your asset remotely, allows them to resolve issues in the shortest possible time, in a single visit, with the correct parts and tools.
- + Electronic control units installed on the machine may be subject to software updates: With the SiteConnect module your CASE Dealer will be able to do software updates on your machine remotely
- + Increase uptime, reduce costs!

Lower your Total Cost of Ownership

+ Thanks to the data collected about your machine condition and performance by Siteconnect, your CASE dealer can provide a quick and effective service, when you need it. This gives you increased Uptime.



Download the SiteManager app to enable remote access to your equipment directly from Dealer facilities, always under your permission. A sticker with a SiteConnect QR code is placed on the rear window.

Scan the QR code with your mobile device to quickly access the SiteConnect page, where you can easily download the SiteManager App and get more useful contents.

STANDARD AND OPTIONS

STANDARD EQUIPMENT

ENGINE

- FPT NEF6 (F4HGE613Z*V) -cylinder turbo-charged diesel (CX210E)
- + Stage V
- Selective Catalytic Reduction on Filter (SCRoF)
- + Diesel Oxidation Catalyst (DOC)
- + EGR-free
- + VGT turbocharger
- + Electronic fuel injection
- + High pressure common rail system
- + Neutral safety start
- + Auto engine warm up, emergency stop
- + Glow-plug pre-heat
- + EPF (Engine Protection Feature)
- + Dual-stage fuel filtration
- + Dual element air filter
- + Remote oil filter
- + Green plug oil drain
- + 1,000 hour engine oil and fuel filters change interval
- + 24V system
- + Battery disconnect switch
- + High ambient temperature cooling package
- + External fuel and AdBlue gauges
- + Fuel cooler
- + Fuel filter + fuel prefilter with water accumulation indicator
- + Fuel shut-off valve
- + Idle start
- + Radiator, oil cooler, intercooler protective screen
- + Refueling pump

FUEL ECONOMY SYSTEMS

- + Eco mode
- + Auto idle
- + One-touch idle
- + Idle shutdown
- + Pump Torque Control (PTC)
- + Boom Economy Control (BEC)
- + Swing Relief Control (SRF)
- + Spool Stroke Control (SSC)
- + Boom Oil Regeneration (BOR)

HYDRAULICS

- + Hydraulic flow control balance
- + Electronically controlled hydraulic pumps
- Multifunction (hammer/high flow) circuit with electrical proportional control (n.a. on CX210E Long Reach)
- + Auto power boost
- + Auto travel speed change
- + 4 selectable work modes
- + Overload warning device
- + ISO pattern controls
- + Pre-set auxiliary pump settings
- + Switch controlled auxiliary selection
- + Auxiliary valve
- + Hydraulic filter restriction indicator
- + Oil cooler
- + 5,000 hour hydraulic oil change interval
- + 2,000 hour hydraulic filter change interval
- + Hydraulic quick coupler provision
- Hydraulic fluid supply port with air breather

UPPERSTRUCTURE

- + ISO mirrors
- + Handrail RH access
- + ISO guard rails
- + Isolation mounted cab (fluid and spring)
- + Lifting eyes for counterweight
- + Lockable fuel cap, service doors and toolbox
- + Rear and side view safety camera

OPERATOR STATION

- + ROPS protection
- + FOPS guard OPG level 2
- + Pressurized cab
- + Tempered safety glass
- + One-touch lock front window
- + Sun visor & rain deflector
- + A/C, heating and defrosting with automatic
- + Luch box & cool box, cup holders & ashtray
- + Interior dome light
- Multi-adjustable low frequency air suspension console and tiltable heated seat with air springs and double acting hydraulic damper
- + Sliding seat 90 mm

- + Seat belt with fasten detection
- + Adjustable armrests
- + Low-effort joystick controls
- + Sliding cockpit 80 mm
- + Auxiliary select system
- + Aux-in port for personal electronics
- + Multifunction LED color monitor (10"), with silicon switches
- + 22 selectable languages for monitor
- + Anti-theft system (start code system)
- + Split type floor mat
- + 12V electric socket
- + 24V cigarette lighter
- + One-piece right hand window
- + 8 LED work lights (2 cab roof, 1 LH boom, 1 toolbox, 4 all-around)
- + Windshield wiper / washer
- + Clear (Lexan) roof window with sunshade
- + Storage compartments
- + On-board diagnostic system
- + Travel alarm
- + DAB+ Bluetooth radio with antenna and 2 speakers

ATTACHMENTS

- + Standard boom 5.7 m
- + 2-piece boom
- + Long reach boom 8.7 m
- + Arm 2.94 m
- + Long reach arm 6.4 m
- Attachment types and names storable in the display

UNDERCARRIAGE

- + 600 mm steel triple grouser shoes
- + Full overlap turntable bearing tub
- + Sealed link chain
- + Lashing points

TELEMATICS

 SiteConnect module and 3 years advanced SiteWatch subscription with remote monitoring

OPTIONAL EQUIPMENT

ENGINE

- + Engine precleaner cyclonic type
- + Reversible fan

HYDRAULICS

- + Clamshell circuit
- + Low-flow circuit, proportional control
- Double acting circuit with electrical proportional control (only on CX210E Long Reach)

UPPERSTRUCTURE

- + Additional +500 kg counterweight (only on CX210E LC)
- + Hydraulic and engine oil sampling ports
- + Automatic greasing system (n.a. on CX210E Long Reach)

OPERATOR STATION

- + Front cab guard vertical bars (OPG level 2)
- + Front cab guard vertical bars (OPG level 1)
- + Front mesh screen, available as DIA kit
- + Front mesn so
 + Rain deflector
- CASE Maximum View Monitor 270° view with additional left side camera
- + 12 LED Deluxe work lights (4 cab roof, 1 LH boom, 1 RH boom, 1 boom foot, 1 toolbox, 4 all-around) [only on CX210E Mono]
- + Steelwrist-ready tiltrotator provision

ATTACHMENTS

+ Arm 2.40 m

UNDERCARRIAGE

- + 500 mm steel triple grouser shoes (only on CX210E NLC)
- + 700 / 800 mm steel triple grouser shoes
- + 900 mm steel triple grouser shoes (for swampy grounds, only on CX210E LC)
- + Triple track guide

SPECIFICATIONS

CX210E

ENGINE

ENGINE	
Model FI	PT NEF6 (F4HGE613Z*V)
Type Water-cooled, 4	1-cycle diesel, 6-cylinder
in line, High pressure common rail system	
Turbocharger with air cooled intercooler, S	SCRoF, EGR free.
Number of cylinders / Displacement (I)	6 / 6.7
Emissions level	
Bore and stroke (mm)	104 x 132
Rated flywheel horse power	
ISO 9249 (kW)	120.4 at 1800 min ⁻¹ (rpm)
ISO 14396 (kW)	124.0 at 1800 min ⁻¹ (rpm)
Maximum torque	
ISO 9249 (Nm)	_ 644 at 1600 min ⁻¹ (rpm)
ISO 14396 (Nm)	_ 657 at 1600 min ⁻¹ (rpm)
HYDRAULIC SYSTEM	
Main pumps	2 variable displacement
axial piston pumps with regulating system	
Max. oil flow (I/min)	
Working circuit pressure	

		2 X 2 11 dt 1000	
Wo	rking circuit pressure		
Boo	om/Arm/Bucket (MPa)	_34.3 - 37.3 with auto power b	oost
Swi	ng circuit (LC/NLC) (MPa)		29.4
Swi	ng circuit (LR) (MPa)		24.0
Trav	vel circuit (MPa)		34.3
			18
Wo	rking circuit pressure (MPa)_		_ 3.9
Boo	om cylinders		
Bor	e (mm)		_ 120
Stro	oke (mm)		1255
_			

Boom positioning (2-piece boom only)	
Bore (mm)	150
Stroke (mm)	1090
Arm cylinder	
Bore (LC/NLC) (mm)	140
Bore (LR) (mm)	145
Stroke (LC/NLC) (mm)	1460
Stroke (LR) (mm)	1627
Bucket cylinder	

Bore (LC/NLC) (mm) _

Stroke (LC/NLC) (mm)_

E Max. dumping height (LC/NLC)

F Min. swing radius

Bore (LR) (mm) _

Stroke (LR) (mm) _

PERFORMANCE DATA MONO LC-NLC		Arm 2.40 m	Arm 2.94 m
Boom length	mm	5700	5700
Bucket radius	mm	1450	1450
Bucket wrist action	0	177	177
A Maximum reach at GRP (LC/NLC)	mm	9240 / 9230	9730
B Maximum reach	mm	9420	9900
C Max. digging depth (LC/NLC)	mm	6110 / 6080	6640 / 6620
D Max. digging height (LC/NLC)	mm	9400 / 9420	9610 / 9640

DIGGING FORCE (ISO 6015)		Arm 2.40 m	Arm 2.94 m
Arm digging force	kN	123	103
with auto power boost	kN	133	112
Bucket digging force	kN	142	142
with auto power boost	kN	154	154

SWING

Swing motor	Fixed displacement axial piston motor
Maximum swing speed (LC/N	NLC) (min ⁻¹)7.8
Maximum swing speed (LR) (min ⁻¹) 6.5
Swing torque (LC/NLC) (kNm)64
Swing torque (LR) (kNm)	52.2

FILTERS

TIETENS	
Suction filter (µm)	105
Return filter (µm)	6
Pilot line filter (µm)	8

ELECTRICAL SYSTEM

Voltage (V)	24
Alternator (Amp)	90
Starter (V - kW)	24 - 4.0
Battery	2 x 12 V 92 Ah/5HR

UNDERCARRIAGE

ONDEHOAIIIIAGE		
Travel motor	_ Variable displacement axial piston mo	tor
High travel speed (Autom	natic travel speed shifting) (km/h) :	5.6
Low travel speed (km/h)_	;	3.4
Drawbar pull (LC/NLC) (k	(N) 188 / 1	187
Number of carrier rollers	(each side)	_ 2
Number of track rollers (e	each side)	_ 8
Number of shoes (each s	side)	49
Type of shoes	Triple grouser sho	oes
Gradeability	70% (3	5°)

NOISE

120

_ 95

1010

_ 881

mm 6590 / 6620 6810 / 6840


3660

3620

External guaranteed sound level	
(EU Directive 2000/14/EC) (dB(A)) _	LwA 100
Operator cab sound pressure level	
(ISO 6396) (dB(A))	LpA 68


CIRCUIT AND COMPONENT CAPACITIES

	LC	NLC
Fuel tank (I)	410	320
Hydraulic system (I)	280	265
Hydraulic tank (I)	162	145
AdBlue tank (I)	84	60

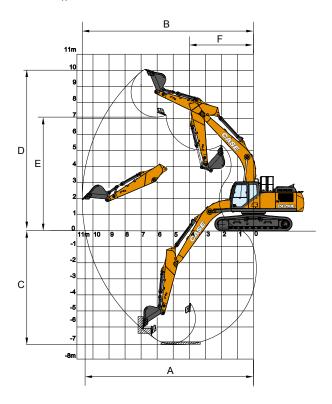

SPECIFICATIONS

CX210E LC-NLC MONO

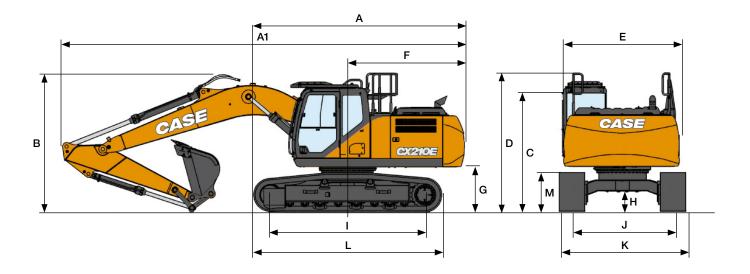

GENERAL DIMENSIONS		Arm 2.40 m	Arm 2.94 m
A Overall length (without attachment) (LC/NLC)	mm	5050 / 5120	5050 / 5120
A1 Overall length (with attachment) (LC/NLC)	mm	9550 / 9630	9470 / 9540
B Overall height (to top of boom) (LC/NLC)	mm	3170 / 3190	2980 / 2970
C Cab height (LC/NLC)	mm	3070 / 3100	3070 / 3100
D Overall height (to top of guardrail) (LC/NLC)	mm	3150 / 3180	3150 / 3180
E Upper structure overall width (LC/NLC)	mm	2760 / 2520	2760 / 2520
F Swing (rear end radius) (LC/NLC)	mm	2830 / 2890	2830 / 2890
G Clearance height under upper structure (LC/NLC)	mm	1040 / 1070	1040 / 1070
H Minimum ground clearance (LC/NLC)	mm	440 / 430	440 / 430
I Wheel base (center to center of wheels)	mm	3660	3660
J Track gauge (LC/NLC)	mm	2390 / 1990	2390 / 1990
K Undercarriage overall width (LC with 600 mm shoes / NLC with 500 mm shoes)	mm	2990 / 2490	2990 / 2490
L Crawler overall length (LC/NLC)	mm	4470 / 4460	4470 / 4460
M Crawler tracks height	mm	920	920

WEIGHT AND GROUND PRESSURE LC

With 2.40 m arm, 1.0 m³ bucket, operator, lubricant, coolant, full fuel tank, FOPS protection level 2 and standard counterweight.

	WEIGHT	GROUND PRESSURE
600 mm grouser shoes	21600 kg	0.045 MPa
700 mm grouser shoes	22040 kg	0.040 MPa
800 mm grouser shoes	22340 kg	0.036 MPa

STD Counterweight: 3800 kg HEAVY Counterweight: 3800 kg + 500 kg

WEIGHT AND GROUND PRESSURE NLC

With 2.40 m arm, 1.0 m³ bucket, operator, lubricant, coolant, full fuel tank and FOPS protection level 2.

	WEIGHT	GROUND PRESSURE
500 mm grouser shoes	22300 kg	0.056 MPa

Counterweight: 4600 kg

LIFTING CAPACITY

CX210E LC-NLC MONO

Front	2.0	m	4.0 m 6.0 m 8.0 m) m	8.0 m At max reach					
Side	Į.,	····		···	III			· · · · ·		Teach	m
Side	J.	TI-	1.	TI	1.	TI	1.	TI	1.	TI	""
C UNDE	RCARRIAG	E - Short arm	2.40 m, 600 m	m shoes, max	reach 7.97 m						
3.0 m									5920*	5920*	4.97
6.0 m					5550*	5320			5500*	4340	6.77
4.0 m			8400*	8400*	6250*	5090			5210	3480	7.66
2.0 m			11580*	8410	7360*	4770			4800	3180	7.97
0 m			12570*	8090	7120	4560			4910	3230	7.76
-2.0 m	9990*	9990*	11890*	8130	7090	4530			5720	3740	6.98
4.0 m			9420*	8420					6710*	5490	5.39
.C UNDE	RCARRIAG	E - Standard	arm 2.94 m, 60	0 mm shoes,	max reach 8.4	5 m					
8.0 m									4170*	4170*	5.72
6.0 m					5030*	5030*			3710*	3710*	7.33
4.0 m			7480*	7480*	5830*	5200	4650*	3320	3660*	3210	8.16
2.0 m			10830*	8670	7050*	4860	4810	3210	3870*	2950	8.45
0 m			12490*	8180	7170	4610	4710	3110	4390*	2980	8.25
-2.0 m	9340*	9340*	12300*	8120	7080	4530			5130	3370	7.53
-4.0 m	17390*	17390*	10440*	8330	6690*	4680			6520*	4590	6.09
.C UNDE	RCARRIAG	E - HEAVY (COUNTERWE	IGHT - Short	arm 2.40 m, 60	00 mm shoes,	max reach 7.97	7 m			
8.0 m									5920*	5920*	4.9
6.0 m					5550*	5550*			5500*	4600	6.77
4.0 m			8400*	8400*	6250*	5390			5400*	3700	7.66
2.0 m			11580*	8940	7360*	5070			5060	3390	7.97
0 m			12570*	8610	7510	4860			5190	3450	7.76
-2.0 m	9990*	9990*	11890*	8650	7480	4830			6040	3980	6.98
4.0 m			9420*	8940					6710*	5840	5.39
ı			1		1				I		
ı	RCARRIAG	E - HEAVY C	OUNTERWEI	GHT - Standa	ard arm 2.94 m	. 600 mm sho	es. max reach	8.45 m	I		
C UNDE	RCARRIAG	E - HEAVY C	: OUNTERWEI	GHT - Standa	ard arm 2.94 m	, 600 mm sho	es, max reach	8.45 m	4170*	'	
LC UNDE	RCARRIAG	E - HEAVY C	COUNTERWEI	GHT - Standa			es, max reach	8.45 m	4170*	4170*	5.72
C UNDE 8.0 m 6.0 m	ERCARRIAG	E - HEAVY C			5030*	5030*			3710*	4170* 3710*	5.72 7.33
.C UNDE 8.0 m 6.0 m 4.0 m	ERCARRIAG	E - HEAVY C	7480*	7480*	5030* 5830*	5030* 5500	4650*	3530	3710* 3660*	4170* 3710* 3410	5.72 7.33 8.16
8.0 m 6.0 m 4.0 m	ERCARRIAG	E - HEAVY C	7480* 10830*	7480* 9190	5030* 5830* 7050*	5030* 5500 5160	4650* 5080	3530 3420	3710* 3660* 3870*	4170* 3710* 3410 3150	5.72 7.33 8.16 8.45
8.0 m 6.0 m 4.0 m 2.0 m 0 m			7480* 10830* 12490*	7480* 9190 8700	5030* 5830* 7050* 7560	5030* 5500 5160 4910	4650*	3530	3710* 3660* 3870* 4390*	4170* 3710* 3410 3150 3190	5.72 7.33 8.16 8.49 8.29
8.0 m 6.0 m 4.0 m 2.0 m	9340* 17390*	9340* 17390*	7480* 10830*	7480* 9190	5030* 5830* 7050*	5030* 5500 5160	4650* 5080	3530 3420	3710* 3660* 3870*	4170* 3710* 3410 3150	5.72 7.33 8.16 8.45 8.25 7.53
8.0 m 6.0 m 4.0 m 2.0 m 0 m -2.0 m	9340* 17390*	9340* 17390*	7480* 10830* 12490* 12300* 10440*	7480* 9190 8700 8640 8850	5030* 5830* 7050* 7560 7470 6690*	5030* 5500 5160 4910 4830 4980	4650* 5080	3530 3420	3710* 3660* 3870* 4390* 5410	4170* 3710* 3410 3150 3190 3600	5.72 7.33 8.16 8.45 8.25 7.53
G UNDE 8.0 m 6.0 m 4.0 m 2.0 m 4.0 m	9340* 17390*	9340* 17390*	7480* 10830* 12490* 12300*	7480* 9190 8700 8640 8850	5030* 5830* 7050* 7560 7470 6690*	5030* 5500 5160 4910 4830 4980	4650* 5080	3530 3420	3710* 3660* 3870* 4390* 5410	4170* 3710* 3410 3150 3190 3600	5.72 7.33 8.16 8.49 8.25 7.53 6.09
8.0 m 6.0 m 4.0 m 2.0 m 0 m 4.0 m 4.0 m 4.0 m 4.0 m 4.0 m 6.0 m	9340* 17390*	9340* 17390*	7480* 10830* 12490* 12300* 10440*	7480* 9190 8700 8640 8850	5030* 5830* 7050* 7560 7470 6690*	5030* 5500 5160 4910 4830 4980	4650* 5080	3530 3420	3710* 3660* 3870* 4390* 5410 6520*	4170* 3710* 3410 3150 3190 3600 4890	5.722 7.33 8.16 8.45 8.25 7.53 6.09
8.0 m 6.0 m 4.0 m 2.0 m 0 m -2.0 m	9340* 17390*	9340* 17390*	7480* 10830* 12490* 12300* 10440*	7480* 9190 8700 8640 8850	5030* 5830* 7050* 7560 7470 6690* ax reach 7.97 r	5030* 5500 5160 4910 4830 4980	4650* 5080	3530 3420	3710* 3660* 3870* 4390* 5410 6520*	4170* 3710* 3410 3150 3190 3600 4890	5.72 7.33 8.16 8.45 8.25 7.53 6.09
8.0 m 6.0 m 4.0 m 2.0 m 4.0 m 4.0 m 4.0 m 4.0 m 4.0 m 4.0 m 6.0 m 6.0 m 4.0 m	9340* 17390*	9340* 17390*	7480* 10830* 12490* 12300* 10440* m 2.40 m, 500	7480* 9190 8700 8640 8850 mm shoes, m	5030* 5830* 7050* 7560 7470 6690* ax reach 7.97 r	5030* 5500 5160 4910 4830 4980	4650* 5080	3530 3420	3710* 3660* 3870* 4390* 5410 6520* 5910* 5500*	4170* 3710* 3410 3150 3190 3600 4890 5910* 4030	5.72 7.33 8.16 8.45 8.25 7.53 6.09 5.01 6.79 7.67
2.0 m	9340* 17390*	9340* 17390*	7480* 10830* 12490* 12300* 10440* m 2.40 m, 500 d 8450* 11610*	7480* 9190 8700 8640 8850 mm shoes, m	5030* 5830* 7050* 7560 7470 6690* ax reach 7.97 r 5560* 6270* 7370*	5030* 5500 5160 4910 4830 4980 10 4940 4720 4410	4650* 5080	3530 3420	3710* 3660* 3870* 4390* 5410 6520* 5910* 5500* 5410*	4170* 3710* 3410 3150 3190 3600 4890 5910* 4030 3250 2970	5.72 7.33 8.16 8.45 8.25 7.53 6.09 5.01 6.79 7.67
8.0 m 6.0 m 4.0 m 2.0 m 4.0 m 4.0 m 4.0 m 4.0 m 6.0 m 4.0 m 6.0 m	9340* 17390* DERCARRIA	9340* 17390* GE - Short an	7480* 10830* 12490* 12300* 10440* m 2.40 m, 500 d 8450* 11610* 12570*	7480* 9190 8700 8640 8850 mm shoes, m 8450* 7560 7260	5030* 5830* 7050* 7560 7470 6690* ax reach 7.97 r 5560* 6270* 7370* 7770	5030* 5500 5160 4910 4830 4980 11 4940 4720 4410 4210	4650* 5080	3530 3420	3710* 3660* 3870* 4390* 5410 6520* 5910* 5500* 5410* 5240 5380	4170* 3710* 3410 3150 3190 3600 4890 5910* 4030 3250 2970 3020	5.72 7.33 8.16 8.45 8.25 7.53 6.09 5.01 6.79 7.67 7.77
8.0 m 6.0 m 4.0 m 2.0 m 4.0 m 4.0 m 4.0 m 6.0 m 4.0 m 6.0 m 4.0 m 2.0 m 0.0 m	9340* 17390*	9340* 17390*	7480* 10830* 12490* 12300* 10440* m 2.40 m, 500 d 8450* 11610*	7480* 9190 8700 8640 8850 mm shoes, m	5030* 5830* 7050* 7560 7470 6690* ax reach 7.97 r 5560* 6270* 7370*	5030* 5500 5160 4910 4830 4980 10 4940 4720 4410	4650* 5080	3530 3420	3710* 3660* 3870* 4390* 5410 6520* 5910* 5500* 5410*	4170* 3710* 3410 3150 3190 3600 4890 5910* 4030 3250 2970	5.72 7.33 8.16 8.45 8.25 7.53 6.09 5.01 6.79 7.67 7.75 6.96
8.0 m 6.0 m 4.0 m 2.0 m 4.0 m 4.0 m 2.0 m 4.0 m	9340* 17390* DERCARRIA 10140*	9340* 17390* GE - Short an	7480* 10830* 12490* 12300* 10440* m 2.40 m, 500 8450* 11610* 12570* 11870* 9360*	7480* 9190 8700 8640 8850 mm shoes, m 8450* 7560 7260 7300 7580	5030* 5830* 7050* 7560 7470 6690* ax reach 7.97 r 5560* 6270* 7370* 7770 7740	5030* 5500 5160 4910 4830 4980 n 4940 4720 4410 4210 4190	4650* 5080	3530 3420	3710* 3660* 3870* 4390* 5410 6520* 5910* 5500* 5410* 5240 5380 6270	4170* 3710* 3410 3150 3190 3600 4890 5910* 4030 3250 2970 3020 3490	5.72 7.33 8.16 8.45 8.25 7.53 6.09 5.01 6.79 7.67 7.75 6.96
8.0 m 6.0 m 2.0 m 6.0 m 4.0 m 2.0 m 4.0 m	9340* 17390* DERCARRIA 10140*	9340* 17390* GE - Short an	7480* 10830* 12490* 12300* 10440* m 2.40 m, 500 8450* 11610* 12570* 11870*	7480* 9190 8700 8640 8850 mm shoes, m 8450* 7560 7260 7300 7580	5030* 5830* 7050* 7560 7470 6690* ax reach 7.97 r 5560* 6270* 7370* 7770 7740	5030* 5500 5160 4910 4830 4980 n 4940 4720 4410 4210 4190	4650* 5080	3530 3420	3710* 3660* 3870* 4390* 5410 6520* 5910* 5500* 5410* 5240 5380 6270 6710*	4170* 3710* 3410 3150 3190 3600 4890 5910* 4030 3250 2970 3020 3490 5100	5.72 7.33 8.16 8.45 8.25 7.53 6.09 5.01 6.79 7.67 7.97 7.75 6.96 5.36
C UNDE 8.0 m 6.0 m 4.0 m 0 m 2.0 m 4.0 m 4.0 m 4.0 m 2.0 m 4.0 m 4.0 m 6.0 m 4.0 m 0 m 6.0 m 4.0 m 0 m 0 m 0 m 0 m 0 m 0 m 0 m 0 m 0 m	9340* 17390* DERCARRIA 10140*	9340* 17390* GE - Short an	7480* 10830* 12490* 12300* 10440* m 2.40 m, 500 8450* 11610* 12570* 11870* 9360*	7480* 9190 8700 8640 8850 mm shoes, m 8450* 7560 7260 7300 7580	5030* 5830* 7050* 7560 7470 6690* ax reach 7.97 r 5560* 6270* 7370* 7770 7740	5030* 5500 5160 4910 4830 4980 n 4940 4720 4410 4210 4190	4650* 5080	3530 3420	3710* 3660* 3870* 4390* 5410 6520* 5910* 5500* 5410* 5240 5380 6270 6710*	4170* 3710* 3410 3150 3190 3600 4890 5910* 4030 3250 2970 3020 3490 5100	5.72 7.33 8.16 8.45 8.25 7.53 6.09 5.01 6.79 7.67 7.97 7.75 6.96 5.36
C UNDE 8.0 m 6.0 m 4.0 m 2.0 m 4.0 m 2.0 m 4.0 m 3.0 m 4.0 m 6.0 m 4.0 m 5.0 m 6.0 m 4.0 m 7.0 m 8.0 m 8.0 m 8.0 m 8.0 m 8.0 m 8.0 m 9.0 m 9	9340* 17390* DERCARRIA 10140*	9340* 17390* GE - Short an	7480* 10830* 12490* 12300* 10440* m 2.40 m, 5000 8450* 11610* 12570* 11870* 9360* d arm 2.94 m, 5	7480* 9190 8700 8640 8850 mm shoes, m 8450* 7560 7260 7300 7580	5030* 5830* 7050* 7560 7470 6690* ax reach 7.97 r 5560* 6270* 7370* 7740 s, max reach 8.	5030* 5500 5160 4910 4830 4980 10 4940 4720 4410 4210 4190 45 m 5030*	4650* 5080 4970	3530 3420 3320	3710* 3660* 3870* 4390* 5410 6520* 5910* 5500* 5410* 5240 5380 6270 6710* 4170* 3710*	4170* 3710* 3410 3150 3190 3600 4890 5910* 4030 3250 2970 3020 3490 5100 4170* 3630	5.72 7.33 8.16 8.45 8.25 7.53 6.09 5.01 6.79 7.67 7.97 7.75 6.96 5.36
C UNDE 8.0 m 6.0 m 4.0 m 2.0 m 4.0 m 2.0 m 4.0 m 3.0 m 4.0 m 4.0 m 4.0 m 4.0 m 5.0 m 6.0 m 4.0 m 6.0 m 4.0 m 7.0 m 8.0 m 6.0 m 7.0 m 8.0 m 8.0 m 6.0 m 7.0 m 8.0 m	9340* 17390* DERCARRIA 10140*	9340* 17390* GE - Short an	7480* 10830* 12490* 12300* 10440* m 2.40 m, 5000 8450* 11610* 12570* 11870* 9360* d arm 2.94 m, 5	7480* 9190 8700 8640 8850 mm shoes, m 8450* 7560 7260 7300 7580	5030* 5830* 7050* 7560 7470 6690* ax reach 7.97 r 5560* 6270* 7370* 7770 7740 s, max reach 8. 5030* 5850*	5030* 5500 5160 4910 4830 4980 n 4940 4720 4410 4210 4190 45 m 5030* 4820	4650* 5080 4970	3530 3420 3320 3110	3710* 3660* 3870* 4390* 5410 6520* 5910* 5500* 5410* 5240 5380 6270 6710* 4170* 3710* 3660*	4170* 3710* 3410 3150 3190 3600 4890 5910* 4030 3250 2970 3020 3490 5100 4170* 3630 3000	5.72 7.33 8.16 8.44 8.22 7.53 6.09 5.0° 6.79 7.75 6.96 5.36 5.72 7.35 8.17
8.0 m 6.0 m 4.0 m 2.0 m 6.0 m 4.0 m 6.0 m	9340* 17390* DERCARRIA 10140*	9340* 17390* GE - Short an	7480* 10830* 12490* 12300* 10440* m 2.40 m, 500 d 8450* 11610* 12570* 11870* 9360* d arm 2.94 m, 5	7480* 9190 8700 8640 8850 mm shoes, m 8450* 7560 7260 7300 7580 500 mm shoes 7530* 7800	5030* 5830* 7050* 7560 7470 6690* ax reach 7.97 r 5560* 6270* 7370* 7770 7740 s, max reach 8. 5030* 5850* 7060*	5030* 5500 5160 4910 4830 4980 n 4940 4720 4410 4210 4190 45 m 5030* 4820 4500	4650* 5080 4970 4700* 5250	3530 3420 3320 3110 3000	3710* 3660* 3870* 4390* 5410 6520* 5910* 5500* 5410* 5240 5380 6270 6710* 4170* 3710* 3660* 3870*	4170* 3710* 3410 3150 3190 3600 4890 5910* 4030 3250 2970 3020 3490 5100 4170* 3630 3000 2760	5.72 7.33 8.16 8.45 8.25 7.53 6.09 5.01 6.79 7.67 7.97 7.75 6.96 5.36
8.0 m 6.0 m 4.0 m 2.0 m 4.0 m 4.0 m 4.0 m 6.0 m	9340* 17390* DERCARRIA 10140*	9340* 17390* GE - Short an	7480* 10830* 12490* 12300* 10440* m 2.40 m, 5000 8450* 11610* 12570* 11870* 9360* d arm 2.94 m, 5	7480* 9190 8700 8640 8850 mm shoes, m 8450* 7560 7260 7300 7580	5030* 5830* 7050* 7560 7470 6690* ax reach 7.97 r 5560* 6270* 7370* 7770 7740 s, max reach 8. 5030* 5850*	5030* 5500 5160 4910 4830 4980 n 4940 4720 4410 4210 4190 45 m 5030* 4820	4650* 5080 4970	3530 3420 3320 3110	3710* 3660* 3870* 4390* 5410 6520* 5910* 5500* 5410* 5240 5380 6270 6710* 4170* 3710* 3660*	4170* 3710* 3410 3150 3190 3600 4890 5910* 4030 3250 2970 3020 3490 5100 4170* 3630 3000	5.72 7.33 8.16 8.45 8.25 7.53 6.09 5.01 6.79 7.67 7.97 7.75 6.96 5.36 5.75 7.35 8.17 8.45 8.24

^{*} The above loads (kg) are compliant to the ISO standards and refer to the excavator equipped without bucket. The indicated loads are no more than 87% of hydraulic system lift capacity or 75% of static tipping load. Values marked with an asterisk (*) are limited by the hydraulic lifting capacity.

BUCKETS

CX210E LC-NLC MONO



LC DIRECT FIT

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	HEAVY D	UTY BUCKET	S	
0.45	600	560	0	0
0.60	750	640	0	0
0.76	900	730	0	0
0.85	1000	760	0	0
0.92	1050	800	0	0
0.96	1100	830	0	0
1.08	1200	880	0	•
1.24	1350	970	•	A
1.40	1500	1040	A	

NLC DIRECT FIT

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	HEAVY D	UTY BUCKET	S	
0.45	600	560	0	0
0.60	750	640	0	0
0.76	900	730	0	0
0.85	1000	760	0	0
0.92	1050	800	0	0
0.96	1100	830	0	•
1.08	1200	880	•	A
1.24	1350	970	A	
1.40	1500	1040		_

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	ROC	BUCKETS		
0.44	600	710	0	0
0.59	750	800	0	0
0.75	900	880	0	0
0.85	1000	940	0	0
0.91	1050	980	0	0
0.96	1100	1010	0	•
1.07	1200	1060		A
1.23	1350	1150	A	

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	ROCK	BUCKETS		
0.44	600	710	0	0
0.59	750	800	0	0
0.75	900	880	0	0
0.85	1000	940	0	0
0.91	1050	980	0	
0.96	1100	1010	•	
1.07	1200	1060	•	A
1.23	1350	1150	_	

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m
90° .	TILT DITCH (CLEANING BU	CKETS**	
0.68	1800	770	0	0
0.76	2000	810	0	0
0.83	2200	880	0	0
0.91	2400	920	0	•
0.95	2500	950	•	•

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m			
90° T	90° TILT DITCH CLEANING BUCKETS**						
0.68	1800	770	0	0			
0.76	2000	810	0	0			
0.83	2200	880	0	•			
0.91	2400	920	•	•			
0.95	2500	950	•				

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m		
DITCH CLEANING BUCKETS						
0.86	1830	650	0	0		
0.94	2130	710	0	0		

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m	
DITCH CLEANING BUCKETS					
0.86	1830	650	0	0	
0.94	2130	710	0	0	

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m			
	GRADING BUCKETS						
0.97	1800	680	0	0			
1.17	2100	740	0	•			
1.35	2400	830	•	A			

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m		
GRADING BUCKETS						
0.97	1800	680	0	0		
1.17	2100	740	•	•		
1.35	2400	830	<u> </u>			

O Rated material density up to 2 ton/m³

Rated material density up to 1.6 ton/m³

[▲] Rated material density up to 1.4 ton/m³

Rated material density up to 1.2 ton/m³

Not applicable
 * with bolt-on edge
 **Tilt angle 45° L/R Connect to Low-Flow Auxiliary Hydraulic Circuit



LC QUICK COUPLED

NLC QUICK COUPLED

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	HEAVY D	UTY BUCKET	S	
0.45	600	560	0	0
0.60	750	640	0	0
0.76	900	730	0	0
0.85	1000	760	0	0
0.92	1050	800	0	•
0.96	1100	830	•	•
1.08	1200	880		A
1.24	1350	970	A	
1.40	1500	1040		_

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m		
HEAVY DUTY BUCKETS						
0.45	600	560	0	0		
0.60	750	640	0	0		
0.76	900	730	0	0		
0.85	1000	760	0	•		
0.92	1050	800		•		
0.96	1100	830		A		
1.08	1200	880	A			
1.24	1350	970		_		

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	ROCK	BUCKETS		
0.44	600	710	0	0
0.59	750	800	0	0
0.75	900	880	0	0
0.85	1000	940	0	•
0.91	1050	980		•
0.96	1100	1010	•	A
1.07	1200	1060	A	
1.23	1350	1150		_

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m		
ROCK BUCKETS						
0.44	600	710	0	0		
0.59	750	800	0	0		
0.75	900	880	0			
0.85	1000	940	•	•		
0.91	1050	980	•			
0.96	1100	1010	A			
1.07	1200	1060		_		

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m		
DITCH CLEANING BUCKETS						
0.86	1830	650	0	0		
0.94	2130	710	0	•		

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m	
DITCH CLEANING BUCKETS					
0.86	1830	650	0	•	
0.94	2130	710		•	

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m
0.97	1800	680	0	•
1.17	2100	740		_
1.35	2400	830	A	


Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m	
GRADING BUCKETS					
0.97	1800	680	•	•	
1.17	2100	740	A		
1.35	2400	830		_	

HAMMER

CX210E

DIRECT FIT

		Reference	machine setting		
Model	Instal weight kg	Flow I/min	Relief pressure MPa	Arm 2.40 m	Arm 2.94 m
CB BREAKER					
CB240S	1150	115	19-21		
CB290S	1500	145	21-22		



[☐] Applicable
— Not applicable

[☐] Applicable with condition (onlly light duty works as residential construction or utilities maintenance)

BUCKETS

CX210E LC - HEAVY COL



LC QUICK COUPLED



LC DIRECT FIT

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	HEAVY D	UTY BUCKET	S	
0.45	600	560	0	0
0.60	750	640	0	0
0.76	900	730	0	0
0.85	1000	760	0	0
0.92	1050	800	0	0
0.96	1100	830	0	0
1.08	1200	880	0	0
1.24	1350	970	•	•
1.40	1500	1040	•	<u> </u>

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	HEAVY D	UTY BUCKET	s	
0.45	600	560	0	0
0.60	750	640	0	0
0.76	900	730	0	0
0.85	1000	760	0	0
0.92	1050	800	0	0
0.96	1100	830	0	0
1.08	1200	880	•	•
1.24	1350	970	•	A
1.40	1500	1040	<u> </u>	

Capacity m ³ (ISO7451 HEAPED)	Width mm				
	BUCKETS				
0.44	600	710	0	0	
0.59	750	800	0	0	
0.75	900	880	0	0	
0.85	1000	940	0	0	
0.91	1050	980	0	0	
0.96	1100	1010	0	0	
1.07	1200	1060	0	•	
1.23	1350	1150	•	A	

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm n 2.94 m				
ROCK BUCKETS								
0.44	600	710	0	0				
0.59	750	800	0	0				
0.75	900	880	0	0				
0.85	1000	940	0	0				
0.91	1050	980	0	•				
0.96	1100	1010	0	•				
1.07	1200	1060		A				
1.23	1350	1150	A					

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m
	DITCH CLE	ANING BUCK	ETS	
0.86	1830	650	0	0
0.94	2130	710	0	0

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m				
DITCH CLEANING BUCKETS								
0.86	1830	650	0	0				
0.94	2130	710	0	0				

	Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m		
GRADING BUCKETS							
	0.97	1800	680	0	0		
	1.17	2100	740	0	0		
	1.35	2400	830	•	•		

Capacity m ³ (ISO7451 HEAPED)	Width mm GRADI	Weight* kg NG BUCKETS	Arm 2.40 m	Arm 2.94 m
0.97	680	0	0	
1.17	2100	740		
1 25	2400	830		<u> </u>

Capacity m³ (ISO7451 HEAPED)	Width Weight* mm kg		Arm 2.40 m	Arm 2.94 m			
90° TILT DITCH CLEANING BUCKETS**							
0.68	1800	770	0	0			
0.76	2000	810	0	0			
0.83	2200	880	0	0			
0.91	2400	920	0	0			
0.95	2500	950	0	•			

O Rated material density up to 2 ton/m³

Rated material density up to 1.6 ton/m³

[▲] Rated material density up to 1.4 ton/m³


Rated material density up to 1.2 ton/m³

Not applicable
 * with bolt-on edge
 **Tilt angle 45° L/R Connect to Low-Flow Auxiliary Hydraulic Circuit



SPECIFICATIONS

CX210E LC-NLC 2-PIECE BOOM

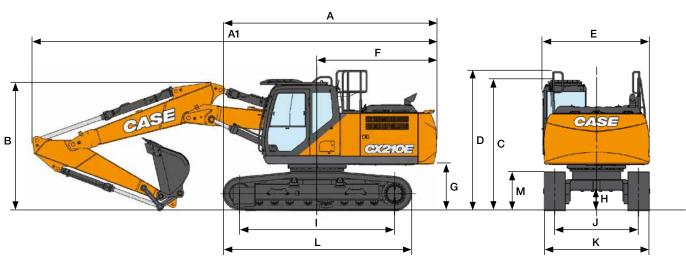

GENERAL DIMENSIONS		Arm 2.40 m	Arm 2.94 m
A Overall length (without attachment) (LC/NLC)	mm	5050 / 5120	5050 / 5120
A1 Overall length (with attachment) (LC/NLC)	mm	9530 / 9600	9470 / 9540
B Overall height (to top of boom) (LC/NLC)	mm	3030 / 3040	2890
C Cab height (LC/NLC)	mm	3070 / 3100	3070 / 3100
D Overall height (to top of guardrail) (LC/NLC)	mm	3150 / 3180	3150 / 3180
E Upper structure overall width (LC/NLC)	mm	2760 / 2520	2760 / 2520
F Swing (rear end radius) (LC/NLC)	mm	2830 / 2890	2830 / 2890
G Clearance height under upper structure (LC/NLC)	mm	1040 / 1070	1040 / 1070
H Minimum ground clearance (LC/NLC)	mm	440 / 430	440 / 430
I Wheel base (Center to center of wheels)	mm	3660	3660
J Track gauge (LC/NLC)	mm	2390 / 1990	2390 / 1990
K Undercarriage overall width (LC with 600 mm shoes / NLC with 500 mm shoes)	mm	2990 / 2490	2990 / 2490
L Crawler overall length	mm	4460	4460
M Crawler tracks height	mm	920	920


PERFORMANCE DATA		Arm 2.40 m	Arm 2.94 m
1st boom length	mm	2960	2960
2 nd boom length	mm	2790	2790
Bucket radius	mm	1450	1450
Bucket wrist action	0	177	177
A Maximum reach at GRP (LC/NLC)	mm	9240 / 9230	9730
B Maximum reach	mm	9420	9900
C Max. digging depth (LC/NLC)	mm	5830 / 5800	6350 / 6320
D Max. digging height (LC/NLC)	mm	10550 / 10580	10910 / 10940
E Max. dumping height (LC/NLC)	mm	7650 / 7680	8010 / 8040
F Min. swing radius	mm	2620	2310

WEIGHT AND GROUND PRESSURE

With 2.40 m arm, 1.0 m³ bucket, operator, lubricant, coolant, full fuel tank and FOPS protection level 2.

	WEIGHT	GROUND PRESSURE
LC		
600 mm grouser shoes	22500 kg	0.047 MPa
NLC		
500 mm grouser shoes	23200 kg	0.058 MPa

STD Counterweight LC: 3800 kg HEAVY Counterweight LC: 3800 kg + 500 kg Counterweight NLC: 4600 kg

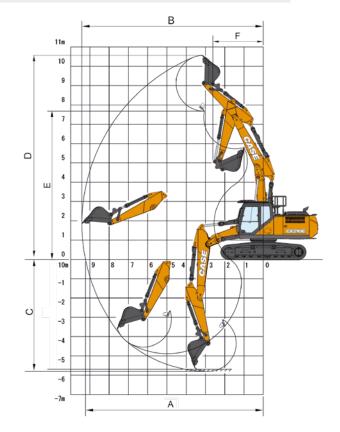

LIFTING CAPACITY

CX210E LC-NLC 2-PIECE BOOM

						RE	EACH						
Front	0.0	0 m	2.0) m	4.0) m) m	8.0) m	At max	x reach	
Side	Ψ	#	ĮΨ	+	Įμ	-	Į.	#i—	Į.	# 	l lil	-	m
LC UND	ERCARRI	AGE - Short	arm 2.40 m	, 600 mm sh	oes, max rea	ach 7.97 m							
8.0 m					7330*	7330*					6360*	6360*	4.97
6.0 m					7450*	7450*	5770*	5500			4930*	4350	6.77
4.0 m					9580*	9580*	6180*	5410			4500*	3450	7.66
2.0 m			10550*	10550*	12340*	9370	7220*	5200			4480*	3140	7.96
0 m			15390*	15390*	12430*	8850	7440	4830			4840*	3190	7.75
-2.0 m	17410*	17410*	24690*	24690*	12680*	8480	7210	4570			5130*	3690	6.98
-4.0 m			18930*	18930*	8700*	8440							
	ERCARRI	AGE - Stanc	dard arm 2.9	4 m, 600 mm	n shoes, max	x reach 8.45	m		ı		1		
8.0 m								5000+			4230*	4230*	5.72
6.0 m			47000*	47000*	0500*	0500*	5390*	5390*	4000*	2000	3730*	3730*	7.34
4.0 m			17090*	17090*	8560*	8560*	5830*	5470	4280*	3300	3650*	3160	8.16
2.0 m	10010*	10010*	18080*	18080*	12010*	9450	6830*	5360	4860	3210	3840*	2890	8.45
0 m	12910*	12910*	15230*	15230*	12390*	9030	7430	4970	4720	3070	4310*	2920	8.25
-2.0 m	14050*	14050*	20560*	20560*	12580*	8510	7260	4620			5030*	3300	7.53
-4.0 m	14600*	14600*	22690*	22690*	10700*	8370			1		5550*	5550	5.02
	DERCARRIA	AGE - HEAV	YY COUNTI	ERWEIGHT	ı		mm shoes,	max reach	7.97 m		0000*	0000*	1 407
8.0 m					7330*	7330*	F770*	F770*			6360*	6360*	4.97
6.0 m					7450*	7450*	5770*	5770*			4930*	4600	6.77
4.0 m			10550*	10550*	9580*	9580* 9820	6180*	5670*			4500*	3670	7.66 7.96
2.0 m 0 m			10550* 15390*	10550* 15390*	12340* 12430*	9370	7220* 7780	5470 5130			4480* 4840*	3350 3400	7.96
-2.0 m	17410*	17410*	24690*	24690*	12680*	9000	7600	4870			5130*	3940	6.98
-4.0 m	17410	17410	18930*	18930*	8700*	8700*	7000	4070			0100	0040	0.50
I C UND	DERCARRI	AGF - HFAV	/Y COUNTI	ERWEIGHT	- Standard	arm 2 94 m	600 mm sh	nes max rea	ach 8 45 m				
8.0 m						a 2.0 ,		,a,			4230*	4230*	5.72
6.0 m							5390*	5390*			3730*	3730*	7.34
4.0 m			17090*	17090*	8560*	8560*	5830*	5700	4280*	3510	3650*	3370	8.16
2.0 m			18080*	18080*	12010*	9870	6830*	5660	4880*	3420	3840*	3090	8.45
0 m	12910*	12910*	15230*	15230*	12390*	9550	7760*	5270	4980	3280	4310*	3120	8.25
-2.0 m	14050*	14050*	20560*	20560*	12580*	9030	7650	4920			5030*	3530	7.53
-4.0 m	14600*	14600*	22690*	22690*	10700*	8890					5550*	5550*	5.02
NLC UN	IDERCARF	RIAGE - Sho	rt arm 2.40 ı	m, 500 mm s	hoes, max r	each 7.97 m							
8.0 m					7290*	7290*					6300*	6300*	5.01
6.0 m					7440*	7440*	5750*	5090			4900*	4010	6.78
4.0 m					9610*	8910	6170*	5050			4470*	3190	7.67
2.0 m			10390*	10390*	12300*	8530	7210*	4810			4460*	2900	7.97
0 m			15500*	15500*	12380*	7920	8010*	4440			4830*	2950	7.75
-2.0 m	17460*	17460*	24840*	24790	12640*	7580	7680*	4190			5090*	3420	6.96
-4.0 m			18620*	18620*	8520*	7560							
NLC UN	IDERCARF	RIAGE - Star	ndard arm 2.	.94 m, 500 m	ım shoes, m	ax reach 8.4	15 m						
8.0 m											4210*	4210*	5.76
6.0 m							5400*	5260*			3720*	3610	7.35
4.0 m			17150*	17150*	8610*	8610*	5840*	5140*	4300*	3080	3660*	2950	8.17
2.0 m			18140*	18140*	12030*	8650	6850*	4970	5970*	3590	3840*	2700	8.45
0 m	12810*	12810*	15290*	15290*	12390*	8120	7990	4590	5060*	2860	4320*	2720	8.25
-2.0 m	14100*	14100*	20660*	20660*	12590*	7640	7950	4260			5020*	3080	7.51
-4.0 m			22550*	22550*	10610*	7520							

^{*} The above loads (kg) are compliant to the ISO standards and refer to the excavator equipped without bucket. The indicated loads are no more than 87% of hydraulic system lift capacity or 75% of static tipping load. Values marked with an asterisk (*) are limited by the hydraulic lifting capacity.

BUCKETS

CX210E LC-NLC 2-PIECE BOOM

LC DIRECT FIT

Capacity m ³ (ISO7451 HEAPED)	Width Weight mm kg		Arm 2.40 m	Arm 2.94 m						
HEAVY DUTY BUCKETS										
0.45	600	560	0	0						
0.60	750	640	0	0						
0.76	900	730	0	0						
0.85	1000	760	0	0						
0.92	1050	800	0	0						
0.96	1100	830	0	•						
1.08	1200	880	•	•						
1.24	1350	970	•	A						
1.40	1500	1040	<u> </u>							

NLC DIRECT FIT

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	HEAVY D	UTY BUCKET	S	
0.45	600	560	0	0
0.60	750	640	0	0
0.76	900	730	0	0
0.85	1000	760	0	0
0.92	1050	800	0	•
0.96	1100	830	•	•
1.08	1200	880	•	A
1.24	1350	970	<u> </u>	
1 40	1500	1040		_

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	ROCK	BUCKETS		
0.44	600	710	0	0
0.59	750	800	0	0
0.75	900	880	0	0
0.85	1000	940	0	0
0.91	1050	980	0	•
0.96	1100	1010	•	•
1.07	1200	1060	•	A
1.23	1350	1150	A	

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	ROCK	BUCKETS		
0.44	600	710	0	0
0.59	750	800	0	0
0.75	900	880	0	0
0.85	1000	940	0	0
0.91	1050	980	0	•
0.96	1100	1010	•	A
1.07	1200	1060	<u> </u>	
1.23	1350	1150		

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
90° T	ILT DITCH (CLEANING BU	CKETS**	
0.68	1800	770	0	0
0.76	2000	810	0	0
0.83	2200	880	0	•
0.91	2400	920		
0.95	2500	950	•	•

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
90° T	ILT DITCH (CLEANING BU	CKETS**	
0.68	1800	770	0	0
0.76	2000	810	0	0
0.83	2200	880	0	•
0.91	2400	920	•	•
0.95	2500	950	•	A

Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m
DITCH CLE	ANING BUCK	ETS	
1830	650	0	0
2130	710	0	0
	mm DITCH CLE 1830	mm kg DITCH CLEANING BUCK 1830 650	mm kg 2.40 m DITCH CLEANING BUCKETS 1830 650 O

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m	
DITCH CLEANING BUCKETS					
0.86	1830	650	0	0	
0.94	2130	710	0	0	

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m
GRADING BUCKETS				
0.97	1800	680	0	0
1.17	2100	740	•	•
1.35	2400	830	•	A

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m
	GRADII	NG BUCKETS		
0.97	1800	680	0	0
1.17	2100	740	•	•
1.35	2400	830	A	

O Rated material density up to 2 ton/m³

Rated material density up to 1.6 ton/m³

[▲] Rated material density up to 1.4 ton/m³

Rated material density up to 1.2 ton/m³

Not applicable
 * with bolt-on edge
 **Tilt angle 45° L/R Connect to Low-Flow Auxiliary Hydraulic Circuit

LC QUICK COUPLED

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	HEAVY D	UTY BUCKET	S	
0.45	600	560	0	0
0.60	750	640	0	0
0.76	900	730	0	0
0.85	1000	760	0	0
0.92	1050	800	0	•
0.96	1100	830		A
1.08	1200	880	A	A
1.24	1350	970	<u> </u>	
1.40	1500	1040	_	_

NLC QUICK COUPLED

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	HEAVY D	UTY BUCKET	S	
0.45	600	560	0	0
0.60	750	640	0	0
0.76	900	730	0	0
0.85	1000	760	0	•
0.92	1050	800		A
0.96	1100	830		A
1.08	1200	880	A	
1.24	1350	970		_

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	ROCK	BUCKETS		
0.44	600	710	0	0
0.59	750	800	0	0
0.75	900	880	0	0
0.85	1000	940	0	•
0.91	1050	980	•	A
0.96	1100	1010	A	A
1.07	1200	1060	<u> </u>	
1.23	1350	1150		_

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
ROCK BUCKETS				
0.44	600	710	0	0
0.59	750	800	0	0
0.75	900	880	0	0
0.85	1000	940	0	•
0.91	1050	980	•	A
0.96	1100	1010	A	
1.07	1200	1060	A	
1.23	1350	1150		_

	Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m
DITCH CLEANING BUCKETS					
	0.86	1830	650	0	0
	0.94	2130	710	0	

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m		
DITCH CLEANING BUCKETS						
0.86	1830	650	0	•		
0.94	2130	710	•	•		

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m
GRADING BUCKETS				
0.97	1800	680	0	•
1.17	2100	740	•	
1.35	2400	830		

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m	
GRADING BUCKETS					
0.97	1800	680	•	•	
1.17	2100	740	A		
1.35	2400	830		_	

O Rated material density up to 2 ton/m³

Rated material density up to 1.6 ton/m³

[▲] Rated material density up to 1.4 ton/m³
■ Rated material density up to 1.2 ton/m³

Not applicable
 * with bolt-on edge
 **Tilt angle 45° L/R Connect to Low-Flow Auxiliary Hydraulic Circuit

BUCKETS

CX210E LC 2-PIECE



LC DIRECT FIT





Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	HEAVY D	UTY BUCKET	S	
0.45	600	560	0	0
0.60	750	640	0	0
0.76	900	730	0	0
0.85	1000	760	0	0
0.92	1050	800	0	0
0.96	1100	830	0	0
1.08	1200	880	0	•
1.24	1350	970	•	A
1.40	1500	1040	<u> </u>	

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	HEAVY D	UTY BUCKET	s	
0.45	600	560	0	0
0.60	750	640	0	0
0.76	900	730	0	0
0.85	1000	760	0	0
0.92	1050	800	0	•
0.96	1100	830	•	•
1.08	1200	880	•	<u> </u>
1.24	1350	970	A	
1.40	1500	1040	_	_

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
	ROCK	BUCKETS		
0.44	600	710	0	0
0.59	750	800	0	0
0.75	900	880	0	0
0.85	1000	940	0	0
0.91	1050	980	0	0
0.96	1100	1010	0	
1.07	1200	1060		
1.23	1350	1150	<u> </u>	

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
ROCK BUCKETS				
0.44	600	710	0	0
0.59	750	800	0	0
0.75	900	880	0	0
0.85	1000	940	0	•
0.91	1050	980		•
0.96	1100	1010	•	A
1.07	1200	1060	<u> </u>	
1.23	1350	1150		_

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m
	DITCH CLE	ANING BUCK	ETS	
0.86	1830	650	0	0
0.04	2120	710	0	^

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m		
DITCH CLEANING BUCKETS						
0.86	1830	650	0	0		
0.94	2130	710	0			

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m
	GRADII	NG BUCKETS		
0.97	1800	680	0	0
1.17	2100	740	0	•
1.35	2400	830	•	

Capacity m³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 2.40 m	Arm 2.94 m
	GRADII	NG BUCKETS		
0.97	1800	680	0	•
1.17	2100	740	•	A
1.35	2400	830	<u> </u>	

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 2.40 m	Arm 2.94 m
90° 1	TILT DITCH C	CLEANING BU	CKETS**	
0.68	1800	770	0	0
0.76	2000	810	0	0
0.83	2200	880	0	0
0.91	2400	920	0	•
0.95	2500	950	•	•

O Rated material density up to 2 ton/m³

Rated material density up to 1.6 ton/m³

[▲] Rated material density up to 1.4 ton/m³


Rated material density up to 1.2 ton/m³

Not applicable
 * with bolt-on edge
 **Tilt angle 45° L/R Connect to Low-Flow Auxiliary Hydraulic Circuit



SPECIFICATIONS

CX210E LONG REACH

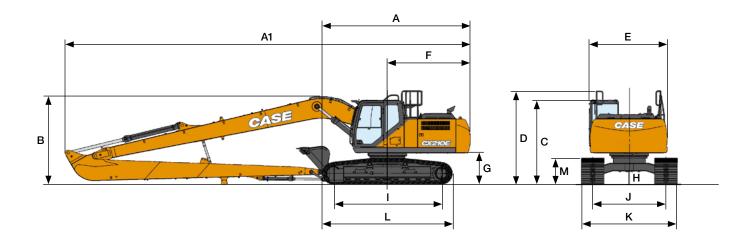


GE	ENERAL DIMENSIONS LONG REACH		Arm 6.40 m
Α	Overall length (without attachment)	mm	5050
A1	Overall length (with attachment)	mm	12580
В	Overall height (to top of boom)	mm	3040
С	Cab height	mm	3070
D	Overall height (to top of guardrail)	mm	3150
Ε	Upper structure overall width	mm	2760
F	Swing (rear end radius)	mm	2830
G	Clearance height under upper structure	mm	1040
Н	Minimum ground clearance	mm	440
1	Wheel base (Center to center of wheels)	mm	3660
J	Track gauge	mm	2390
K	Undercarriage overall width (with 800 mm shoes)	mm	3190
L	Crawler overall length	mm	4470
М	Crawler tracks height	mm	920

00 0
with auto power boost
Bucket digging force
with auto power boost

DIGGING FORCE (ISO 6015)

Arm digging force

PERFORMANCE DATA		Arm 6.40 m
Boom length	mm	8700
Bucket radius	mm	1200
Bucket wrist action	0	178
A Maximum reach at GRP	mm	15490
B Maximum reach	mm	15600
C Max. digging depth	mm	12010
D Max. digging height	mm	12970
E Max. dumping height	mm	10730
F Min. swing radius	mm	5220

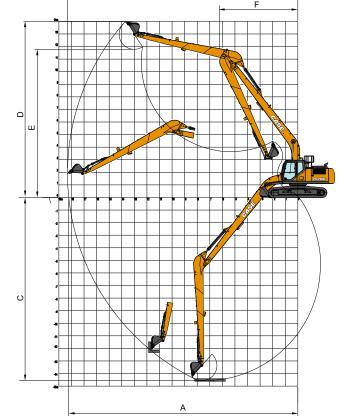

Arm 6.40 m

46

50

65

70

kΝ

kN

kΝ

kΝ

WEIGHT AND GROUND PRESSURE

With 6.40 m arm, 0.37 m³ bucket, 800 mm grouser shoes, operator, lubricant, coolant, full fuel tank and FOPS protection level 2.

	WEIGHT	GROUND PRESSURE
LR	23800 kg	0.037 MPa

Counterweight: 4700 kg

LIFTING CAPACITY

CX210E LONG REACH

									REA	СН									
Front	0.0	m	2.0) m	4.0) m	6.0	m	8.0	m	10.	0 m	12	.0	14	.0	At max	reach	
Side	ļ.	 	μ	 	μ	 	ļ.	 	Į.	 	μ	Ħ	l _l i]	≓ i⊸	Į.	†	μ	 	m
LC UNDERCARRIAGE - Super long arm 6.40 m, 800 mm shoes, max reach 14.40 m																			
10.0 m																	1360*	1360*	11.83
8.0 m													2130*	2060			1310*	1310*	13
6.0 m											2290*	2290*	2230*	2000			1300*	1300*	13.78
4.0 m									2950*	2950*	2620*	2620*	2420*	1890	1740*	1370	1340*	1320	14.23
2.0 m					6940*	6940*	4820*	4820*	3620*	3380	3000*	2400	2650*	1760	2130	1310	1410*	1240	14.4
0 m					3660*	3660*	5910*	4420	4240*	3020	3380*	2190	2630	1640	2060	1250	1540*	1200	14.28
-2.0 m			2280*	2280*	3940*	3940*	6570*	4060	4510	2770	3300	2030	2540	1550			1730*	1230	13.88
-4.0 m	2950*	2950*	3330*	3330*	4890*	4890*	6640	3920	4370	2650	3210	1950	2490	1500			2040*	1320	13.16
-6.0 m	3840*	3840*	4470*	4470*	6230*	6230*	6670	3940	4360	2630	3200	1940	2520	1530			2500	1520	12.07

^{*} The above loads (kg) are compliant to the ISO standards and refer to the excavator equipped without bucket. The indicated loads are no more than 87% of hydraulic system lift capacity or 75% of static tipping load. Values marked with an asterisk (*) are limited by the hydraulic lifting capacity.

4470

3470*

2730

2990

3300

2040

4090

BUCKETS

5800* 5800*

CX210E LONG REACH

6840*

7610


6840*

4850*

DIRECT FIT

-8.0 m

-10 m

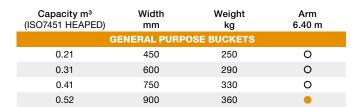

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 6.40 m					
DITCH CLEANING BUCKETS								
0.54	1830	480	A					

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 6.40 m						
GRADING BUCKETS									
0.59	1500	440							

3110

3370*

1930

2930

10.49

8.14

	Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 6.40 m			
90° TILT DITCH CLEANING BUCKET							
Ī	0.46	1500	640				

QUICK COUPLED

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight kg	Arm 6.40 m
Gl	ENERAL PURP	OSE BUCKETS	
0.21	450	250	0
0.31	600	280	0
0.41	750	310	•
0.52	900	360	•

Capacity m ³ (ISO7451 HEAPED)	Width mm	Weight* kg	Arm 6.40 m					
DITCH CLEANING BUCKET								
0.54	1830	370						

^{*} with bolt-on cutting edge

Rated material density up to 1.2 ton/m³
A Rated material density up to 1.4 ton/m³

Rated material density up to 1.6 ton/m³
 O Rated material density up to 2 ton/m³



BUILDING A STRONG CASE.

Since 1842, at CASE Construction Equipment we have lived by an unwavering commitment to build practical, intuitive solutions that deliver both efficiency and productivity.

We continually strive to make it easier for our customers to implement emerging technologies and new compliance mandates.

Today, our global scale combined with our local expertise enables us to keep customers' real-world challenges at the center of our product development.

The vast CASE dealers' network is always ready to support and protect your investment and exceed your expectations, while also providing you with the ultimate ownership experience.

Our goal is to build both stronger machines-and stronger communities. At the end of the day, we do what's right for our customers and our communities so that they can count on CASE.

CNH Industrial

Deutschland GmbH Case Baumaschinen Benzstr. 1-3 - D-74076 Heilbronn DEUTSCHLAND

CNH Industrial

Maquinaria Spain, S.A. Avenida Aragón 402 28022 Madrid - ESPAÑA

CNH Industrial France, S.A.

16-18 Rue des Rochettes 91150 Morigny-Champigny FRANCE

CNH Industrial Italia Spa

Lungo Stura Lazio 19 10156, Torino ITALIA

CASE Construction Equipment

Cranes Farm Rd Basildon - SS14 3AD UNITED KINGDOM

NOTE: Standard and optional fittings can vary according to the demands and specific regulations of each country. The illustrations may include optional rather than standard fittings - consult your Case dealer. Furthermore, CNH Industrial reserves the right to modify machine specifications without incurring any obligation relating to such changes.

Conforms to directive 2006/42/EC

