HYDRAULIC ROCK BREAKER

CB230

CX210, CX220, CX235





BREAKTHROUGH ANY OBSTACLE WITH ROCK BREAKER ATTACHMENT





ROCK BREAKER CB230

INTRODUCTION

CASE Genuine Parts product range offers strong, reliable & productive hydraulic Rock Breaker for Loader Backhoes with a complete range of hammer tools for all the applications.

This offers customers the freedom to choose the best tool combination, according to machine requirement, which ensures maximum productivity.



To meet our mission of extending full product/parts support to our dealers and customers with a comprehensive solution for their requirements, CASE has launched its Rock Breaker. CASE Rock Breaker mounting accessories, brackets and hose kits are CASE engineered and designed, for maximum efficiency in all its applications. This also includes pin and bushing kits, hose kits and mounting brackets for all CASE machines.

CASE Rock Breaker are supported throughout India with spare parts, manuals and technical support at all times to minimize downtime and maintain application demand. CASE Rock Breaker installations are taken care by CASE After-Sales Support Team throughout India, and integrates the dealer and customer with its Attachment Product Training to sync into the CASE system.



FEATURES

- Technology gives consistent performance on every blow
- Easy service and maintenance
- Low fatigue on base machines
- High Returns on Investments
- Low running cost
- Ensured reliability
- Quality verified & approved by CASE engineering team
- CASE Rock Breaker with across the nation warranty
- High impact energy & Impact rate

TYPE


- CASE Rock Breaker provide optimized rotation angles & allow a wide range of work positions.
- Fully enclosed power cell for maximum component protection from work materials
- Sound absorbing elements inside housing, lower noise output for sound sensitive applications

ROCK BREAKER CB230

TECHNICAL SPECIFICATIONS

Operating weight*	1,873 kg		
Breaker bracket weight	236 kg		
Operating pressure	160~190 kg/cm²		
Port relief setting pressure**	210 kg/cm ²		
Oil flow	119~161 lpm		
Blow rate Power mode	340~450 bpm		
Blow rate Speed mode	420~550 bpm		
Tool diameter	135 mm		
Suitable carrier	20~26 ton		
Allowable back pressure	22 bar		



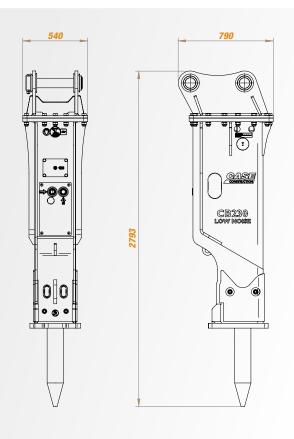

	Application type					
Conventional tool		Primary breaking	Secondary breaking	Hard rock removal	Soft material & rock removal	Demolition
	Moil	•			•	•
	Chisel	0		0	•	•
0	Blunt		•			0

	Ap	Application type			
Special tool	Asphalt removal	Compacting	Post driving		
Sp.	pade				
Com	pacting	•			
	phant foot		•		

- Note:

 * Operating weight includes breaker bracket with 2 pins, one work tool and two hydraulic hoses. Operating weight is only indicative one for the purpose of sharing with Buyer and subject to change.
- ** Guide for carrier port relief valve pressure setting.



SMART DESIGN

• Power cell floating system

No metal to metal contact, bolt free

• Fully enclosed power cell

NOISE PROTECTOR ----

• Less noise (silenced type)

INTERNAL VALVE SYSTEM -

• Energy efficient internal control valve system

RETURN LINE BACK PRESSURE -

 Allowable up to 44 bar (highest in the industry)

LARGE CAPACITY -----ACCUMULATOR & DIAPHRAGM

- Protect carrier hydraulic components from peak pressure
- Accelerate striking speed
- Prevent cavitation and increase seal life time
- Extended diaphragm service life

BOTTOM PLATE - - (HARDOX/AR400)

- Protect housing structure
- Increase housing service life

TOOL

- Heat treated tool
- Longer wear life

CUSHION DAMPER

 Absorb repercussion from hammering and increases carrier endurance

AUTO LUBRICATION SYSTEM

- Increase tool, tool pins, bush life time
- Vibrating type

LARGER GAS CHAMBER & OPTIMUM PISTON SIZE

- Ensure higher impact power and speed
- Suitable for secondary rock breaking quarry application

BUSHES

- Differentiated heat treatment
- Higher core hardness
- Longer wear life

WIDE TOOL PIN

- · Heavy duty oval shape dual pins
- Heat treated pins
- Longer wear life
- Rubber plugged on all mounting holes
- Easy to service
- Bolt free, low maintenance cost

Corporate Identity Number: U29240MH1998PTC117183
CASE NEW HOLLAND CONSTRUCTION EQUIPMENT (INDIA) PRIVATE LIMITED

B1-207, 2nd Floor, Boomerang, Chandivali Farm Road Near Chandivali Studio, Andheri (East) Mumbai – 400072, Maharashtra, India

Email:caseindia@cnhind.com

NOTE: CASE provides specific outfits for various countries and many optional fittings (OPT). The illustrations on this or other leaflets may relate to standard or optional fittings. Please consult your CASE dealer for any information in this regard and any possible updating on components. CNH Industrial reserves the right to modify machine specifications without incurring any obligation relating to such changes.

Follow us on 🚹 🍏 @caseceindia

