

## ENGINE

Model	Yanmar 4TNV98CT
Emissions Certification	Tier 4 Final / Stage V
Net horsepower - SAE J1349 @ 2300 RPM:	72 hp (53.3 kW)
Displacement	3.3 L
Cylinders	4-cylinder in line
Cooling	Liquid

## DRIVETRAIN

Travel speeds - 2-speed travel w/ auto-shift:	
1st	1.6 mph (2.6 kph)
2nd	3.2 mph (5.2 kph)

## ELECTRICAL

Voltage	12 volts
Alternator rating	80 amp
Battery	1 x 12 volts
Battery reserve capacity	100 Ah
Work lights	1 x boom / 1x roof

## OPERATOR ENVIRONMENT

Boom, arm, bucket and swing	2 x pilot joysticks
Tracks	2 x pilot levers
Dozer blade	1 x lever
Aux 1	1- or 2-way flow
Electric proportional switch on right joystick	
Aux 2 2-way flow	
Electric proportional switch on right joystick	
Boom swing	
Electric proportional switch on left joystick	
Aux 2/boom swing switch selection on right joystick	

## OPERATING WEIGHT

Operating weight with rubber tracks:	20,305 lb (9 210 kg)
--------------------------------------	----------------------


## HYDRAULICS

Type	Open Center
Pump type	2 x gear pumps
Max. rated flow total:	50.7 gpm (192 L/min)
Max. system pressure	4,206.1 psi (290 bar)
Aux. 1 rated flow @ 200 bar	42.3 gpm (160 L/min)
Aux. 2 rated flow @ 290 bar	29.1/15.9 gpm (110/60 L/min)
Aux. 3 rated flow @ 250 bar	13.2 gpm (50 L/min)
Slew speed	9.5 rpm
2nd Auxiliary (Aux 2) circuit with	Electro-Hydraulic proportional control

## SERVICE CAPACITIES

Fuel tank	28 gal (105 L)
Hydraulic oil tank	22 gal (85 L)
Hydraulic circuit capacity	36 gal (135 L)
Cooling system capacity	6.1 gal (23 L)
Engine oil	2.6 gal (10 L)



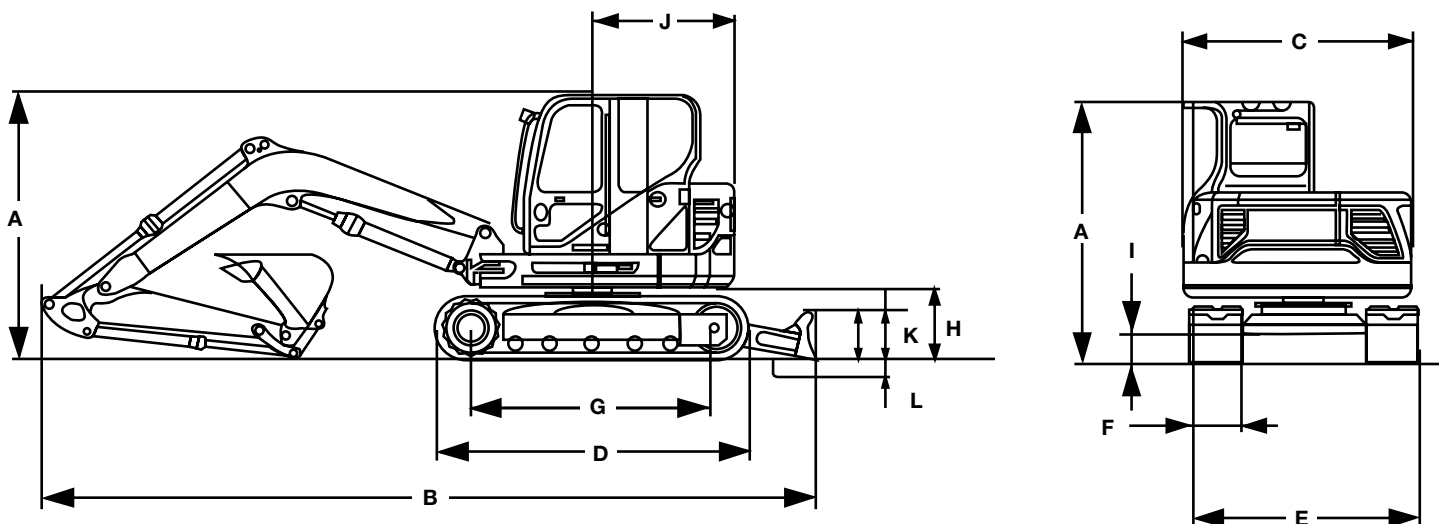

Line drawings are for illustrative purpose only  
and may not be exact representation of unit.


### DIMENSIONS

#### 5 ft 9 in (1.76 m) Arm

A. Overall height	8 ft 10 in (2 680 mm)
B. Overall transport length	22 ft 4 in (6 802 mm)
C. Width of upper structure	7 ft 7 in (2 300 mm)
D. Track overall length	9 ft 6 in (2 896 mm)
E. Track overall width	7 ft 7 in (2 320 mm)
F. Track shoe width	1 ft 6 in (450 mm)
G. Center to center - idler to sprocket	7 ft 7 in (2 303 mm)
H. Upper structure ground clearance	2 ft 4 in (705 mm)
I. Minimum ground clearance	1 ft 2 in (363 mm)
J. Tail swing radius: Standard counterweight	1 ft 9 in (525 mm)
Boom swing	71° left / 54° right
Tail swing overhang: Standard counterweight	5 in (127 mm)

### BLADE SPECS

K. Backfill blade rise above ground	1 ft 5 in (440 mm)
L. Backfill blade dig depth	1 ft 4.5 in (420 mm)
Backfill blade width	7 ft 7 in (6 802 mm)

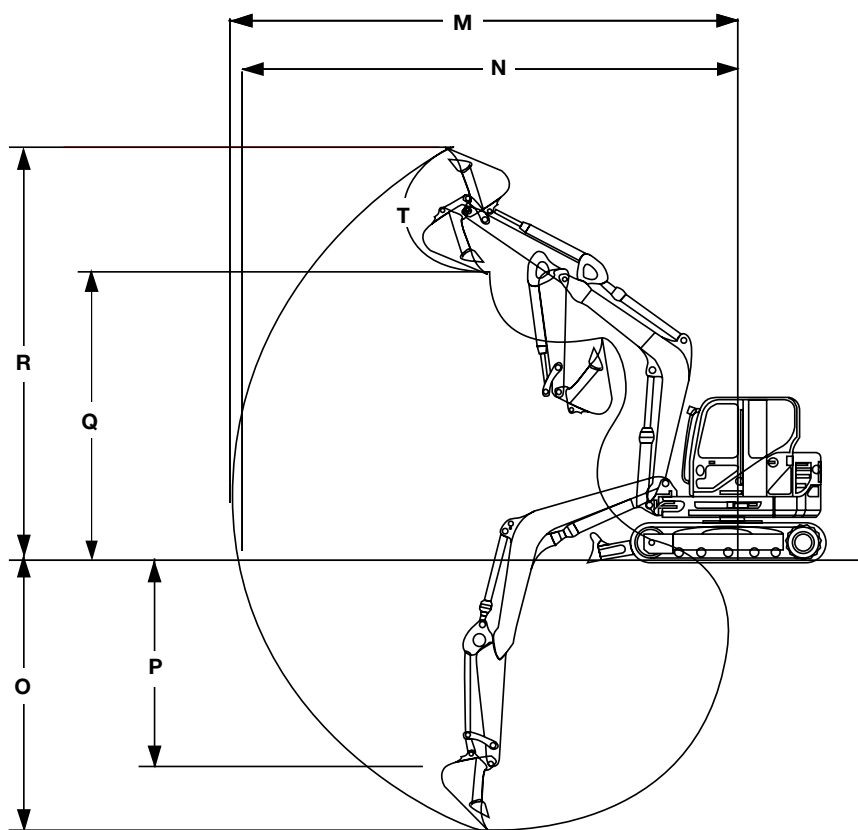

### PERFORMANCE SPECS

	5 ft 9 in (1.76 m)	6 ft 11 in (2.11 m)
M. Maximum dig radius	22 ft 7 in (6 880 mm)	23 ft 8 in (7 210 mm)
N. Dig radius at groundline	22 ft 1 in (6 720 mm)	23 ft 2 in (7 060 mm)
O. Maximum dig depth	13 ft 7 in (4 130 mm)	14 ft 8 in (4 480 mm)
P. Vertical straight wall dig depth	9 ft 6 in (2 900 mm)	10 ft 7 in (3 230 mm)
Q. Dump height	15 ft 3 in (4 660 mm)	16 ft (4 880 mm)
R. Overall reach height	21 ft 5 in (6 530 mm)	22 ft 2 in (6 750 mm)
Arm digging force - ISO	9,779 lbf (44 kN)	8,655 lbf (39 kN)
Bucket digging force - ISO	14,163 lbf (63 kN)	14,163 lbf (63 kN)


Opening arm from the rotation's center ft-in (mm)  
Lifting capacity in lb (kg) at 3-4 (1,000) height

LIFTING CAPACITY	6 FT 7 IN (2 000 MM)	MAX
Frontal and lowered dozer blade	7,760 lb (3 520 kg)	5,049 lb (2 290 kg)
Frontal and lifted dozer blade	4,652 lb (2 110 kg)	2,646 lb (1 200 kg)
Lateral, open undercarriage	3,770 lb (1 710 kg)	2,183 lb (990 kg)

\* Indicates the hydraulic load limit.

The lifting capacity is based on the ISO 10567 and it does not exceed more than the 75% of static tipping load or more than the 87% of the hydraulic lifting capacity of the machine.

Standard arm L = 2-11 (900)  
Long arm L = 3-4 (1,020)

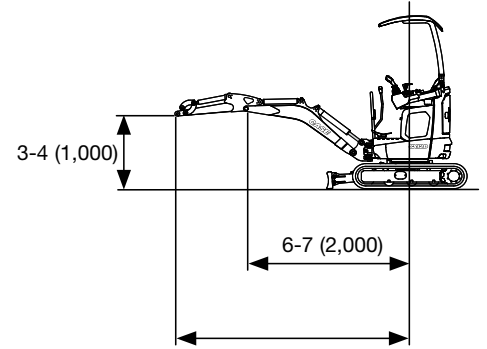

## STANDARD EQUIPMENT

### ENGINE

Yanmar 4TNV98CT diesel engine -  
Tier 4 Final/Stage V compliant  
Dry air filter with drain valve and electric  
anti-clogging indicator  
Glow plugs for cold weather starting  
Electronic proportional engine RPM control  
and auto-idle/shut-down  
Programmable hydraulically driven variable  
speed reversible cooling fan with  
automatic functionality

### ELECTRICAL

12-volt electrical system  
Heavy-duty battery  
Battery disconnect switch  
Auxiliary power socket next to operator  
Auxiliary power socket on roof for beacon  
Key start switch  
Horn  
Radio, Bluetooth, USB and Aux-in (cab only)  
Travel Alarm  
MyCASEConstruction Telematics  
Includes hardware and 7-yr data subscription

### UPPER STRUCTURE

Zero tail swing (with standard counterweight)  
Long arm with thumb bracket  
Pin-on bucket  
Swing boom  
Enclosed cab with ROPS/TOPS/FOPS Level 1  
LED worklights  
LED beacon  
Standard counterweight  
Bucket linkage with lifting hook  
Tilttable Cab (ROPS/TOPS – FOPS Level 1)

### HYDRAULICS

Variable displacement hydraulic pump  
High flow 1-/2-way auxiliary hydraulics (AUX1)  
Low flow 2-way auxiliary hydraulics (AUX2)  
Attachment quick coupler auxiliary hydraulics  
(2-way I double effect)  
Direct drain to tank auxiliary circuit  
On display control pattern change (ISO/SAE)  
Cylinder guard on boom and dozer  
blade cylinders  
Mineral based hydraulic oil and lubricants  
On display AUX1, AUX2, and AUX3 flow setup  
On display controls customized  
sensitivity setup  
AUX1 1-/2-way flow selection button

### UNDERCARRIAGE & TRACK DRIVE

18" steel shoes with rubber pad tracks  
Retractable tracks/undercarriage  
2-speed travel with auto shift up/down  
Fully hydrostatic drive system  
Sealed and lubricated track rollers  
Hydraulically adjustable track tensioner  
(with grease)  
Dozer blade with float

### OPERATOR ENVIRONMENT

Auto climate control A/C and heating  
Adjustable air suspension heated seat  
with seat belt  
Travel levers with foldable foot pedals  
Joystick steering functionality  
Electro-hydraulic controlled joystick and  
blade control lever  
Engine throttle dial  
7-inch LCD display with navigation console  
Warning light indicators  
Visual indicators  
Ignition key that opens all machine panel locks  
Operator's manual compartment  
Rear view camera  
Automatic courtesy light (in-cab/outside)  
Windshield wiper and washer  
2-piece overhead stowable windshield  
Slide right side window  
Adjustable arm rests  
Cup holder  
Footrests

### WARRANTY

Base warranty coverage: 2-Year/ 3,000-Hour  
Full Machine Limited Warranty

## OPTIONAL EQUIPMENT

### ELECTRICAL

Electric refuel pump with auto-stop function

### HYDRAULICS

Low flow 2-way auxiliary hydraulics (AUX2)

AUX2 and AUX3 proportional control joysticks with switch button

Object handling kit with hose burst check valves and overload indicator light

Blade safety hose burst check valve

High constant flow 1-way mulching head auxiliary hydraulics

Automatic centralized lubrication

Attachment quick couple auxiliary hydraulics (1-way | single effect)

### UNDERCARRIAGE & TRACK DRIVE

18" steel track shoes

24" steel track shoes

Rubber belt tracks

6-way dozer blade with cutting edge, float and dual side foldable extensions

### UPPER STRUCTURE

Short arm with thumb bracket

Full range of attachment quick couplers

Full range of buckets

Hydraulic thumb

Biodegradable hydraulic oil and lubricants

Anti-theft system

Additional bolt-on counterweight

Front protection guard (Level 2)

Additional slide-in counterweight (Light)

Additional bolt-on counterweight (Heavy)

### OPERATOR ENVIRONMENT

Rear view mirrors

**CaseCE.com**

©2025 CNH Industrial America LLC. All rights reserved. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Capital is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates.

Form No. CCE202512CX90E  
Replaces Form No. CCE202505CX90E

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.



CASE Construction Equipment is biodiesel-friendly. NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.



Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.