T4 FNV
Auto Command™

T4.90 NV
T4.100 FNV
T4.110 FNV
T4.120 FNV



NEW HOLLAND


NOBILI



Summary

Comfort that transforms your day 04

Auto Command™:
performance without compromise 06

Everything at hand.
Everything under control 08

Ready for every implement 10

Precision that pays 12

Specifications 14

Comfort that transforms your day

Long working days demand more from both tractor and operator. T4 FNV Auto Command™ combines an adjustable suspended cab, suspended front axle and pneumatic seat to reduce shocks and vibration, helping you stay comfortable, focused and productive for longer.



Quiet focus

At just 69dB(A), the cab provides a quieter workplace. Less noise supports concentration when monitoring the implement, tractor information and the crop.



Full suspension

The cab and front axle work together to absorb uneven ground. A pneumatic seat with fore-and-aft functionality further smooths the ride for greater stability and less fatigue.

Panoramic view

The four-pillar cab opens visibility to the front, sides and rear, making row following, implement monitoring and confined manoeuvres easier.



Auto Command™: performance without compromise

T4 FNV Auto Command™ range offers tractors from 90 to 120hp with a continuously variable transmission, reaching 50kph on the road. Power, speed and engine rpm adapt to the application for smooth operation, consistent output and effortless control.



Efficient road work

40kph ECO or 50kph ECO maintains transport speed at reduced engine rpm, making journeys between plots faster, quieter and more comfortable.



The right speed

Auto Command™ lets you select the exact forward speed for the job, with no power interruption. The tractor moves smoothly through rows at the controlled speed of your setting.

Torque down low

Maximum torque of 518Nm at 1,300rpm, available on the 120hp engine, delivers pulling power without relying on high engine speed, helping the tractor respond under load and in demanding conditions.



Everything at hand.
Everything under control

T4 FNV Auto Command™ brings high-horsepower New Holland ergonomics to the specialty segment. The SideWinder™ armrest groups essential functions within easy reach, making operation intuitive and reducing unnecessary movement.





Quick to master

Intuitive controls and clearly presented information support a rapid learning curve. This is especially valuable for businesses where several operators use the same tractor.





One control hub

Transmission, hydraulic functions and key tractor controls are logically grouped on the SideWinder™ armrest for fast access without taking attention away from the row or the implement.

Natural position

The adjustable armrest moves with the seat, keeping controls comfortably positioned in changing working conditions and helping reduce strain throughout the day.



Ready for every implement

Pruning, spraying, mowing, soil care or transport: every task brings different demands. High-capacity hydraulics, flexible connections and front and rear equipment options help T4 FNV Auto Command™ get the most of modern specialty implements.









115l/min CCLS

The CCLS hydraulic system delivers up to 115l/min for implements with high flow demand, supplying complex equipment consistently while preserving tractor responsiveness.

Precise control

Electronic controls support accurate management of hydraulic functions and attached implements. Compatible ISOBUS TIM tools can interact with the tractor to coordinate the tractor-implement combination.



Configured for you

Up to five rear remote valves plus right-hand side hydraulic outlets and two left hand side mid-mounted create the flexibility to match the tractor to different implements and seasonal operations.

Precision that pays

New Holland Precision Technology helps operators work with greater accuracy, repeatability and control. Integrated guidance, sequence automation and connectivity help make better use of every pass and every hour in the field.






Smart automation

Headland Turn Sequence (HTS) II can store working sequences, with GPS triggering according to equipment.

IntelliTurn automates compatible headland turns, reducing repetitive inputs.

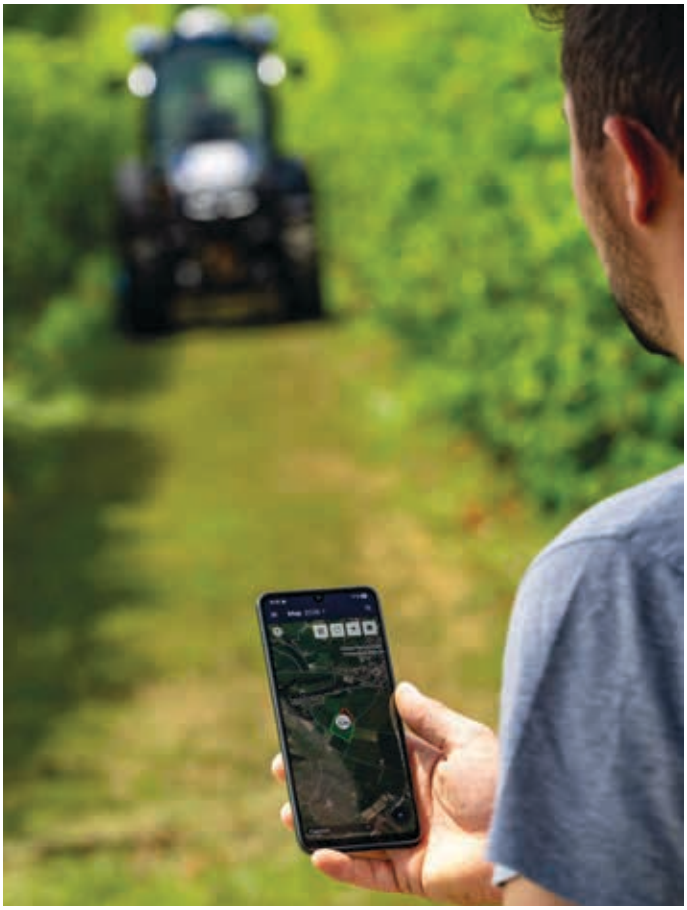

Connected

FieldOps™ provides access to machine information for activity and performance monitoring.

Visible

The available LED offer adds powerful illumination, including up to 10 LED lights.

Integrated guidance

IntelliView™ 12 and the PLM Cygnus receiver bring guidance functions into one integrated solution, supporting consistent passes and reduced overlap.



Models	T4.90	T4.100	T4.110	T4.120
Engine				
Model	FPT - F36			
No. of cylinders / Capacity *(cm³)* / Valves / Emissions Level	4 / 3600 / 4 / Stage V			
Max. power @ 1900rpm *[kW/hp(CV)]*	63/87	73/100	81/111	88/121
Max. torque ISO TR14396 *(Nm)*	351 @ 1300rpm	407 @ 1300rpm	490 @ 1300rpm	518 @ 1300rpm
Horizontal exhaust	●			
Vertical exhaust	O			
Fuel tank capacity (4WD/SuperSteer) *(Litres)*	104/75 - 95			
AdBlue tank capacity *(Litres)*	11			
Service interval *(hours)*	600			
Transmission				
Auto Command™ transmission *(kph)*	● / 0.03 - 40 ECO @ 1500rpm	● / 0.03 - 40 ECO @ 1500rpm / 50 @ 1780rpm		
Pneumatic trailer brake	O			
Front Axle				
Suspended axle	O			
SuperSteer axle	O			
Steering angle (4WD/SuperSteer) (°)	55/76			
Hydraulic				
CCLS load sensing pump closed center *(l/min)*	115			
Max. lift capacity at ball ends with arms horizontal *(kg)*	2520			
Max. no. rear remotes	5			
Right hand side couplers	8			
Left hand midmount valves	2			
Max. front linkage lift capacity at ball ends double acting *(kg)*	1500			
PTO				
540 / 540E	●			
540 / 540E / 1000 and ground speed	O			
Dimensions and weight				
Minimum overall width (V/N/F) *(mm)*	1110/1240/1410			
Height from rear centre tyre to top cab *(mm)*	1919			
Wheelbase (4WD/SuperSteer) *(mm)*	2180/2435			
Max. permissible weight (V/N/F) *(kg)*	4800/4800/5200			
Operator Environment				
Certified Cab Level 4	●			
LED lights package	●			
Fender mounted external controls	●			
SideWinder™ armrest	●			
Air conditioning	●			
Suspended Cab	O (F only)			
Precision Tech	O			

● Standard O Optional





www.newholland.com

NEW HOLLAND

The data indicated in this folder are approximate. The models described here can be subjected to modifications without any notice by the manufacturer. The drawings and photos may refer to equipment that is either optional or intended for other countries. Please apply to our Sales Network for any further information. Published by New Holland Brand Communications. BTS Adv. - Printed in Italy - 10/26 - (Turin) - 260004/COM